# ENVIRONMENTALMONITORING REPORT OF

## SYAMA PRASAD MOOKERJEE PORT

PERIOD: - January' 2021 to December' 2021 (Consolidated Statements)

Directed by:



### SYAMA PRASAD MOOKERJEE PORT, Kolkata

(Erstwhile Kolkata Port Trust)

Kolkata Dock System

15, Strand Road, Kolkata - 700001.



### SYAMA PRASAD MOOKERJEE PORT, KOLKATA

(Erstwhile Kolkata Port Trust)

Kolkata Dock System
15, Strand Road, Kolkata - 700001

Conducted by:

### M/S. R.V. BRIGGS & CO. PRIVATE LIMITED.

8-9, Bentinck Street, Kolkata - 700 001.

### **TABLE OF CONTENTS**

### PERIOD: FEBRUARY' 2021 TO APRIL' 2021

SL. NO.	ITEM	PAGE
1	INTRODUCTION	1 - 3
2	AMBIENT AIR QUALITY STUDIES	4 – 11
3	AMBIENT NOISE QUALITY STUDIES	12 – 26
4	DRINKING WATER QUALITY STUDY	27 – 30
5	SURFACE WATER ( RIVER)	31 – 34
6	EFFLUENT WATER QUALITY STUDY (DOCK BASIN WATER)	35 – 37

### **PERIOD: MAY' 2021 TO JULY' 2021**

SL. NO.	ITEM	PAGE
1	INTRODUCTION	38 – 41
2	AMBIENT AIR QUALITY STUDIES	42 – 51
3	AMBIENT NOISE QUALITY STUDIES	51 – 68
4	DRINKING WATER QUALITY STUDY	68 – 72
5	SURFACE WATER ( RIVER)	72 – 76
6	EFFLUENT WATER QUALITY STUDY (DOCK BASIN WATER)	77 - 80

### PERIOD: AUGUST' 2021 TO DECEMBER' 2021

SL. NO.	ITEM	PAGE
1	INTRODUCTION	81 – 84
2	AMBIENT AIR QUALITY STUDIES	85 – 93
3	AMBIENT NOISE QUALITY STUDIES	94 – 100
4	DRINKING WATER QUALITY STUDY	101 - 104
5	SURFACE WATER ( RIVER)	105 – 108
6	EFFLUENT WATER QUALITY STUDY (DOCK BASIN WATER)	109 - 111

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

### **PREFACE**

Syama Prasad Mookherjee Port( Kolkata), the renowned Dock of West Bengal, has entrusted us the services for Environmental monitoring work during the period from 01.02.2021 to 31.12.2021, on behalf of the Management of the company. The Present Report has been prepared on the basis of Pollution Monitoring & Analysis Data of M/S .R.V. BRIGGS & CO (P) LTD., Kolkata, a WBPCB approved Laboratory, during the period from February'21 to Decmber'21.

For R. V. Briggs & Co (P) Ltd.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

# PERIODIC ENVIRONMENTAL MONITORING REPORT

# FEBRUARY2021 TO APRIL 2021

Chapter - 1

1.0 INTRODUCTION: Pollution is emerging as one of the most significant and challenging

environmental problems of our modern Society. The Kolkata Port Trust (KoPT) is situated on the left

bank of the Hooghly River at 22°32′53″N 88°18′05″E about 203 km (126 mi) upstream from the sea.

The pilotage station is at Gasper/ Saugor roads, 145 Kilometres to the south of the KDS (around 58 km

from the sea). The system consists of. Kidderpore Docks (K.P. Docks): 18 Berths,

6 Buoys / Moorings and 3 Dry Docks. Kolkata Port Trust (officially renamed after the name of BJS

founder as Dr. Syama Prasad Mukherjee Port Trust, is the only riverine major port of India located in

the city of Kolkata, India, It is the oldest operating port in India, and was constructed by the British East

India Company.

Major air pollutants generated by port activities include carbon monoxide (CO), volatile organic

compounds (VOCs), nitrogen oxides (NOx), sulfur oxides (SOx), and particulate matter (PM).

Prolonged exposure to these compounds can effect health include respiratory diseases, cardiovascular

disease, lung cancer and premature death.

Noise from port areas comes not only from ferries, ships and trade but also from industrial and

shipyards activities as well as auxiliary services. In this way, noise pollution can produce negative

effects both to the natural eco-system and to the urban population.

Port operations can cause significant damage to water quality—and subsequently to marine life and

ecosystems, as well as human health. These effects may include bacterial and viral contamination of

commercial fish and shellfish, depletion of oxygen in water, and bioaccumulation of certain toxins in

fish.8 Major water quality concerns at ports include wastewater and leaking of toxic substances from

ships, stormwater runoff, and dredging

Waste management is the most important part in the port areas. Waste management relates to all

kinds of wastes, both liquid and solid, likely to be disposed of in the port area. These wastes include

dredged materials, garbage and oily mixtures discharged from ships, wastes from cargo operations,

and all types of discharges from municipal and waterfront industry activities.

1.1.0 Scope of Work: The periodic measurement of Ambient Air quality, Meteorological

observation, Ambient Noise quality, Surface water quality, Drinking water quality and also Effluent

quality studies were carried out for the session June to August. M/s R. V. Briggs & Co. Pvt. Limited, 9,

Bentinck Street, Kolkata – 700001, performed the whole work. Funding and other logistic supports

were provided by KPT, Khidderpore. According to the work order, the scope of work included:

- 1.1.1 Systematic evaluation of **AmbientAir quality**took place for 8 hourly basis at four (04) locations
- i) KPD, (Near Dry Dock Area 2)
- ii) KPD-2, (Beside Shed No. 22)
- iii) NSD, (Administrative Building)
- iv) NSD, (BERTH NO 4)

and for 24 hours duration at one (01) location respectively. The whole work was executed for determination of Respirable Particulate matter (RPM), Oxides of Sulfur (SO<sub>2</sub>), Oxides of nitrogen (NO<sub>x</sub>), Carbone Monoxide(CO) from each sample.

On each day of sampling at each stations samples for all five parameters (PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub> and NO<sub>2</sub>) were collected as follows:

- i)  $PM_{10}$  3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- ii) PM<sub>2.5</sub> 1 (one) shift of 24 (twenty four) hrs. twice in a week for a every 3 months for a period of one year
- iii) SO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year iv) NO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- v) CO 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- **1.1.2 Ambient Noise level monitoring:** It was carried out for 24 hourly basis in every month from the following four (04) Locations:
- i) KPD, (Near Dry Dock Area 2)
- ii) KPD-2, (Beside Shed No. 22)
- iii) NSD, (Near BERTH No. 7)
- iv) NSD, (Near BERTH No. 3)
- . All the study work was carried out for determination of Leq, Lmax, Lmin, Lday, L night, L 10, L50 and L90, Ldn etc from each locations as per the Principal rules were published in the Gazette of India vide number, S.O 123 (E), dated 14<sup>th</sup> February, 2000 and subsequently amended vide S.O 1046 (E), dated 22 <sup>nd</sup> November, 2000, S.O 1088 (E), dated 11 <sup>th</sup> October, 2002, S.O, 1569 (E), dated the 19 <sup>th</sup> September, 2006 and S.O 50 (E) dated 11 <sup>th</sup> January, 2010.).

### 1.1.3Water sample collection:

- Drinking Water samples collected from
  - (i) Head Office Canteen
  - (ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap.

- (iii) Remount Road Quarter, 9 No. Civil Site Office
- (iv) Port Land Park Quarter, Civil Site Office
- (v) SMP Kolkata Hospital Canteen # 09
- (vi) Container Terminal Office, (NSD)
- (vii) NS Dock Office ,(WTP)
- (viii) KP Dock Office

Following parameters were determined from the sample: pH, Colour, TURBIDITY, Chloride, Residual chlorine, Total Dissolved Solid, Coliform Bacteriological count as per stipulated norms for analysis of Drinking Water Quality of Central Pollution Control Board,

The following parameters were taken into consideration for drinking water analysis:

- (a) Microbiological Tests: (i) Total Coliform Organism / 100 ml. of water, (ii) Faecal (E.Coli) coliform Count
- Dock Basin Water samples collected from
  - (i) 7 8 N.S. Dock
  - (ii) N.S.D. Lock Entrance
  - (iii) KPD 2 (26-28 KPD)
  - (iv) KPD 1 (11 KPD)
- River Water samples collected from
- (i) Outside NS Dock Basin on River
- (ii) Outside KP Dock Basin on River
- Following parameters were determined from the sample: pH, Colour, TURBIDITY, Dissolved Oxygen (D.O), Bio Chemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Oil & Grease, Sulphate, Ammoniacal Nitrogen (NH<sub>4</sub> N), Total Dissolved Solid, Total Suspended Solid, Saliniy, Coliform Bacteriological count as per stipulated norms for analysis of Dock Basin&RiverWater Quality of Central Pollution Control Board,
- **1.2.0 Period of Study:** The entire study period was on selected days between June to August 2020.
- **1.3.0 Work load Completed:** The environmental sampling and related studies that were carried out in the field and at the R.V.Briggs laboratory

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

Chapter - 2

### 2.0 AMBIENT AIR QUALITY STUDIES

- **2.1.0 Objective:** The most important objective of the study was to obtain a valid idea about the prevailing ambient air quality over the entire project area, during June to August 2020
- 2.2.0 Work Elements: The main objectives of the study are:-

As per the work order, the following work elements were evaluated:

- (a) Collection of ambient air samples for 24 hourly period from 4 air sampling stations as per para 1.3.1, for determination of the concentration of the following pollutants:
- i) Respirable Particulate matter (RPM), (ii) Suspended Particulate Matter (SPM), (iii) Sulphur Di Oxide (SO<sub>2</sub>), (iv) Nitrogen Oxide (NOx), (v) Carbone Monoxide respectively.
- **2.3.0 Preparation of Sampling Sites:** At each of the air sampling stations, the actual site of placement of air sampling equipments were prepared according to the guide lines stipulated in IS: 5182 of Bureau of Indian Standard approved by the Ministry of Environment & Forests (MoEF), Government of India.
- **2.4.0 Duration of Air Sampling:** Air sampling operations were fixed for 24 hours in 3 shifts and were splits into eight hours duration in each shift for 4 stations. So, 12 samples were collected from these stations. Therefore, altogether 12 samples were taken into consideration.
- **2.6.0 Sampling Equipment & Methodology:** Air samples collected by using High Volume Air sampler Machine (Envirotech, APM 460 BL)

### 2.7.0 Laboratory Determination:

**2.7.1 Respirable Particulate Matter**:- For every station and for every shift, one Glass micro fibre filter paper with a dimension of 203 mm  $\times$  254 mm was used to collect air samples. At each station, a total time period of 24 hours duration was taken into consideration for collection of samples. Which was splits into 3 shifts each of 8 hours duration. Thus, for a 24 hours monitoring a total number of 3 filter papers were used. So, for four (4) stations in total 3  $\times$  4 = 12 samples were collected.

Before sampling, all these filter papers were dried in an air oven followed by drying in desiccators. The dried filter papers were weighed and then fitted in the high volume air sampler. The filter papers were re-weighted at the end of the duration of sampling (8 hours or 6 hours). From the weight indicate the weight of RPM particle collected over a period of 8 hours or 6 hours. From the corresponding data on total volume of air, which passed through the sampling machine over the same duration of time, the concentration of RPM was computed in terms of  $\mu g/m^3$  of air. The assessments were made according to their respective land use categories.

### 2.7.2: Suspended Particulate Matter (SPM):

The pre-weighed empty sample bottles, in which SPM particles were collected, were weighed both in the pre and post monitoring times. The gain in weight indicated the total weight of SPM collected during 8 or 6

hours sampling times. From the corresponding data on total volume of air drawn in by the sampling machine, the concentration of SPM was computed in µg/ m³ of air.

### 2.7.3: Sulphur Di Oxide (SO<sub>2</sub>):

 $SO_2$  in the ambient air was absorbed in 0.05 (M) potassium tetrachloromercurate solution at a flow rate 0.5 litre / minute. It was analysed spectrophotometrically after developing the colour for 30 minutes by adding sulphamic acid, Formaldehyde and P – rosaniline hydrochloride solution as per IS:5182 (Part – II) 2001 (West & Gacke method) and recorded the absorbance at 560 mm. Then the concentration of  $SO_2$  was measured by standard curve and represented the results as  $\mu g/m^3$  in respect of air volume.

### 2.7.4: Nitrogen Oxides (NO<sub>x</sub>):

 $NO_x$  was collected by bubbling air through 0.1 (N) sodium hydroxide and sodium arsenite solution at flow rate 0.4 lit /min. It was analyzed spectrophotometrically after developing the colour for 10 minutes by adding Hydrogen peroxide, sulphanilamide and NEDA solution as per IS: 5182 (Part – VI) 2006 (Jacobs & Hochheiser method ) and recorded the absorbance at 540 mm. Then the concentration of  $NO_x$  was measured by standard curve and represented the result as  $\mu g/m^3$  in respect of air volume.

### 2.7.5: Carbone monoxides (CO):

CO was collected in a bladders and estimated by CO Analyzer and Orsat.

### 2.8.0 Results of laboratory determinations:

The salient findings of concentrations of RPM, SPM,CO, SO<sub>2</sub> and NOx (Table 2.1) of this study are as follows:

### 2.8.1 Ambient Air Quality in the areas under Industrial, Residential, Rural and Other areas:

(a) Residential Areas:

### Near Dry Dock Area-2.:-

The concentration of **PM2.5** ranged from 56.0  $\mu$ g/m<sup>3</sup> to 81.0  $\mu$ g/m<sup>3</sup> with a mean value of 73.0  $\mu$ g/m<sup>3</sup>.

The concentration of **PM**10 ranged from87.0 μg/m³ to218.0 μg/m³ with a mean valueof141 μg/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 4.2μg/m³ 6.5μg/m³ of air with a mean value of 5.5 μg/m³ of air. While the concentration of **NO**xranged from 25.9 μg/m³to 39.7μg/m³ of air with a mean value of 33.0μg/m³ of air and the concentration of **CO**ranged from 1.2 mg/m³ to 1.30 mg/m³ of air with a mean value of 1.27 mg/m³ of air. Observation: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

### Beside Shed No:22.:-

The concentration of **PM2.5** ranged from 86  $\mu$ g/m<sup>3</sup> to 137.0  $\mu$ g/m<sup>3</sup> with a mean value of 107.0  $\mu$ g/m<sup>3</sup>.

The concentration of **PM**10 ranged from 127.0  $\mu$ g/m³ to 301  $\mu$ g/m³ with a mean value of 213  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 4.2  $\mu$ g/m³ 6.8 $\mu$ g/m³ of air with a mean value of 5.7  $\mu$ g/m³ of air While the concentration of **NO**x ranged from 28.0  $\mu$ g/m³ to 39.5 $\mu$ g/m³ of air with a mean value of 33.8  $\mu$ g/m³ of air and the concentration of **CO**ranged from 1.2 mg/m³ to 1.4 mg/m³ of air with a mean value of 1.31 mg/m³ of air.

Observation: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

### Administrative Building.:-

The concentration of **PM2.5** ranged from  $58 \mu g/m^3$  to  $122.0 \mu g/m^3$  with a mean value of  $96.0 \mu g/m^3$ .

The concentration of **PM**10 ranged from 85.0  $\mu$ g/m³ to 287.0  $\mu$ g/m³ with a mean value of 190  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 4.2 $\mu$ g/m³ 7.5 $\mu$ g/m³ of air with a mean value of 5.8  $\mu$ g/m³ of airWhile the concentration of **NO**x ranged from 25.6 $\mu$ g/m³ to 42 $\mu$ g/m³ of air with a mean value of 35.1 $\mu$ g/m³ of air and the concentration of **CO** ranged from 1.2 mg/m³ to 1.4mg/m³ of air with a mean value of 1.29 mg/m³ of air.

Observation: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

### BERTH No – 4. NS Dock

The concentration of **PM2.5** ranged from  $63\mu g/m^3$  to  $131.0 \mu g/m^3$  with a mean value of  $96.0 \mu g/m^3$ .

The concentration of **PM**10 ranged from 81 μg/m³ to 396.0 μg/m³ with a mean value of 198 μg/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 4.2μg/m³ 6.8μg/m³ of air with a mean value of 5.6 μg/m³ of air. While the concentration of **NO**xranged from 27.7μg/m³ to 39.5μg/m³ of air with a mean value of 34.0 μg/m³ of air and the concentration of **CO**ranged from 1.2 mg/m³ to 1.4 mg/m³ of air with a mean value of 1.28 mg/m³ of air. Observation: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.





Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

Table - 2.1


LAND USE CATEGORY - WISEDISTRIBUTION OF AIR SAMPLING STATIONS AND ITS ANALYTICAL RESULTS
(17.03.2021 TO 13.04.2021)

Location : SMP, KPD (Near Dry Dock Area-2)

Period : 17.03.2021 TO 13.04.2021

Date of Inspection						U	nit in µg/r	n³							Unit in	mg/m³	
	PM2.5		PN	110			sc	)2			N	D2			С	0	
	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.												
17.03.2021	71	133	144	166	148	5.4	5.8	6.1	5.8	32.1	29.6	28.8	30.2	1.29	1.27	1.22	1.26
24.03.2021	73	122	127	173	141	5.4	6.1	5.7	5.7	35.5	32.2	28.1	31.9	1.29	1.26	1.23	1.26
27.03.2021	78	130	184	165	160	4.2	5.8	5.4	5.1	37.2	39.7	38.8	38.6	1.31	1.26	1.21	1.26
30.03.2021	81	171	218	111	167	4.4	6.5	4.9	5.3	32.9	37.2	32.1	34.1	1.30	1.28	1.22	1.27
02.04.2021	75	106	194	162	154	5.8	6.3	5.6	5.9	38.5	36.8	31.0	35.4	1.32	1.29	1.25	1.29
05.04.2021	56	91	121	134	115	5.4	6.1	5.1	5.5	36.8	36.0	30.1	34.3	1.28	1.32	1.18	1.26
08.04.2021	69	87	175	120	127	4.7	5.4	5.8	5.3	29.6	33.7	28.8	30.7	1.28	1.27	1.24	1.26
1304.2021	78	144	115	97	119	5.1	5.4	4.9	5.1	29.7	30.5	25.9	28.7	1.29	1.28	1.23	1.27
Norms NAAQM	60				100				60				60				5.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD (Near Dry Dock Area-2) (March'21 to April'21)

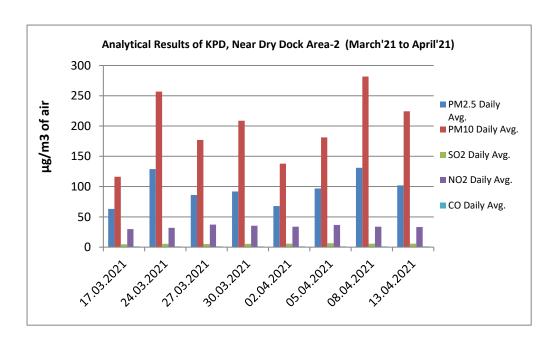


Location: SMP, KPD-2 (Beside Shed No. 22)

Period : 17.03.2021 TO 13.04.2021

Date of Inspection						Ur	nit in µg	/m³							Unit in	mg/m³	
	PM2.5		PM	10			so	)2			N	02			С	0	
	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Dail y Avg	Shift- 1	Shif t-2	Sh ift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.
17.03.2021	96	127	173	245	182	5.6	4.7	5.8	5.4	30.4	33.7	28.0	30.7	1.31	1.28	1.20	1.26
24.03.2021	116	191	185	286	221	6.0	6.5	5.8	6.1	32.9	36.9	29.7	33.2	1.31	1.28	1.22	1.27
27.03.2021	112	165	191	292	216	5.8	6.5	5.4	5.9	29.3	32.7	33.5	31.8	1.29	1.27	1.24	1.27
30.03.2021	86	205	237	140	194	5.4	4.7	4.2	4.8	30.1	35.2	31.8	32.4	1.32	1.33	1.25	1.30
02.04.2021	101	224	252	176	217	6.5	6.3	5.4	6.1	35.4	37.0	34.6	35.7	1.35	1.29	1.27	1.30
05.04.2021	95	178	242	193	204	6.1	6.8	6.3	6.4	37.9	39.5	32.1	36.5	1.30	1.33	1.26	1.30
08.04.2021	112	224	262	184	223	5.6	5.8	4.9	5.4	34.6	36.3	37.2	36.0	1.29	1.30	1.23	1.27
13.04.2021	137	258	301	186	248	6.1	5.6	4.4	5.4	36.0	34.5	31.4	34.0	1.36	1.29	1.28	1.31
Norms NAAQM	60				100				60				60				5.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD-2 (Beside Shed No. 22) (March'21 to April'21)

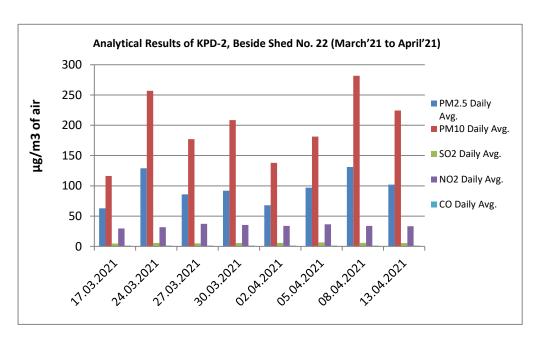


Location : SMP, NSD (Administrative Building)

Period : 17.03.2021 TO 13.04.2021

Date of Inspection						Un	it in µg	J/m³							Unit in	mg/m³	
оросио	PM2.5		PM	10			S	02			N	102			С	0	
	Daily Avg.	Shift- 1	Shift- 2	Shift -3	Dail y Avg.	Shi ft-1	Shi ft-2	Shi ft-3	Dail y Avg.	Shift -1	Shift- 2	Shift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.
17.03.2021	66	115	161	112	129	5.4	5.6	4.2 0	5.1	27.30	29.80	25.60	27.6	1.28	1.25	1.18	1.24
24.03.2021	102	171	211	251	211	5.2	6.6	5.9 0	5.9	38.70	37.00	32.90	36.2	1.31	1.29	1.25	1.28
27.03.2021	106	227	218	162	202	5.6	6.1	5.1	5.6	36.20	34.50	37.80	36.2	1.30	1.33	1.25	1.29
30.03.2021	120	236	277	168	227	5.4	4.9 0	5.6	5.3	37.00	32.80	34.50	34.8	1.34	1.31	1.28	1.31
02.04.2021	95	197	252	170	206	7.5	6.5	6.3	6.8	38.70	39.50	36.20	38.1	1.36	1.30	1.32	1.33
05.04.2021	122	287	251	199	246	6.5	7.5 0	5.8	6.6	37.80	42.00	37.00	38.9	1.32	1.34	1.24	1.30
08.04.2021	101	205	158	223	195	5.8	6.3	5.4	5.8	36.20	37.80	30.30	34.8	1.32	1.33	1.26	1.30
13.04.2021	58	130	101	85	105	6.3	5.8	4.9	5.7	34.9	35.7	32.6	34.4	1.31	1.32	1.25	1.29
Norms NAAQM	60				100				60				60				5.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (Administrative Building) (March'21 to April'21)

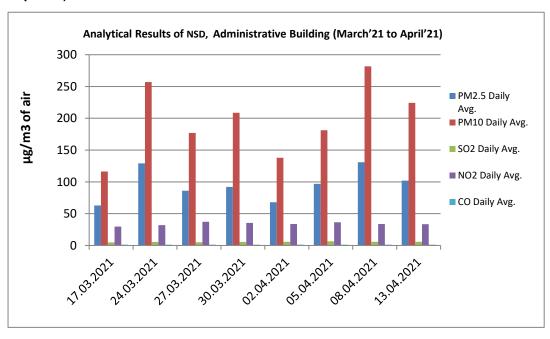


Location : SMP, NSD (BERTH NO - 4)

Period : 17.03.2021 TO 13.04.2021

Date of Inspection						Unit	in µg/n	n <sup>3</sup>							Unit in	mg/m³	
	PM2.5		PI	V110			so	2			N	02			С	0	
	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	Shift -1	Sh ift- 2	Sh ift- 3	Da ily Av g.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.
17.03.2021	63	144	124	81	116	4.2	5.1	4.7	4.7	32.00	27.70	29.40	29.7	1.26	1.23	1.17	1.22
24.03.2021	129	158	276	337	257	6.1	5.6	4.9	5.5	31.80	34.20	29.50	31.8	1.29	1.27	1.19	1.25
27.03.2021	86	156	194	181	177	4.9	6.3	4.2	5.1	39.50	37.90	34.60	37.3	1.32	1.29	1.22	1.28
30.03.2021	92	191	293	142	209	5.6	5.8	4.9	5.4	37.90	36.20	32.10	35.4	1.26	1.32	1.28	1.29
02.04.2021	68	192	116	106	138	6.3	5.6	5.4	5.8	34.60	37.20	29.60	33.8	1.31	1.37	1.21	1.30
05.04.2021	97	178	219	147	181	6.8	6.5	6.1	6.5	38.80	38.00	32.90	36.6	1.30	1.33	1.19	1.27
08.04.2021	131	254	396	195	282	6.3	5.8	5.4	5.8	33.80	38.80	28.70	33.8	1.32	1.30	1.23	1.28
13.04.2021	102	99	235	339	224	5.6	6.3	5.1	5.7	35.3	33.8	30.9	33.3	1.35	1.35	1.29	1.33
Norms NAAQM	60				100				60				60				5.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (BERTH NO - 4) (March'21 to April'21)

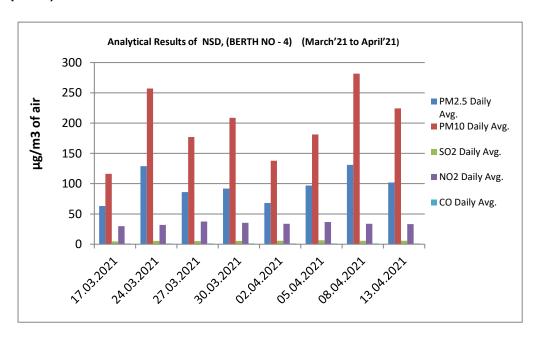

# Table – 2.2 [SCHEDULE VII] [See rule 3 (3B)] National Ambient Air Quality Standards

Pollutants	Time Weighted	Concentration in Ambient Air (µg / m³ of air)							
. Gilatanto	Average	Industrial, Residential, Rural & Other Areas	Ecologically Sensitive Areas						
Sulphur Dioxide (SO <sub>2</sub> )	Annual Average *	50	20						
	24 hours**	80	80						
Nitrogen Dioxide (NO <sub>2</sub> )	Annual Average *	40	30						
	24 hours**	80	80						
Carbon monoxide	8 hours**	2	2						
(CO)	1 hours**	4	4						
Particulate Matter (PM10) (size less than 10µm) or	Annual Average *	60	60						
PM <sub>10</sub>	24 hours**	100	100						
Particulate Matter (PM2.5) (size less than 2.5µm	Annual Average *	40	40						
	24 hours**	60	60						

<sup>\*</sup> Annual Arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform interval \*\* 24 hourly / 8 hourly values should be met 98 % of the time in a year. However, 2 % of the time, it may exceed but not on two consecutive days.

[Norms as per Ministry of Environment and Forests Notification, New Delhi, the 16<sup>th</sup> November, 2009] [Environment (Protection) Seventh Amendment Rules, 2009]

Chapter - 3

### 3.0 AMBIENT NOISE QUALITY STUDY

- **3.1.0Objective:** Anevaluation of ambient noise levels were carried out in and around the working areasduring September –December 2017, according to the following land use (Table 3.3) categories:
- Ambient Noise level in the Residential areas.
- Ambient Noise levels in the Commercial areas
- Ambient Noise Level in the Industrial areas

### 3.2.0 Selection of Noise level Monitoring Stations:

The noise level measurement stations selected according to each land use category, the locationdetails of which have been depicted in Table 3.0.

### 3.3.0 Sampling equipment and methodology:

### 3.3.1:Equipment:

Noise level measurements were carried out with the help of portable Sound level Meter (SL-4001 and SL 4033SD) respectively. M / S Lutron manufactured both the instruments.

### 3.3.2: Methodology:

- (a) For determination of ambient noise at a particular point, the noise meter probe was pointed to the four cardinal directions of north, south, east and west. Corresponding to each direction a set of reading in "slow" setting was recorded.
- (b) During the study time a gap of 30 seconds was allowed between two consecutive data observation. Sound level was collected to monitor the values of L 10, L 50, L 90, Lmax, Lmin& L day and L night during the period of 24 hrs.monitoring period.
- (c) The noise levels were recorded continuously at 1 hourly interval through SL 4001. Thus in total 1440 readings were recorded after 12 hours study. While through SL 4033 SD, the ambient noise levels were measured for 24 hours continuously. So, here a total number of 2880 readings were recorded after 24 hours study.

The measurements recorded are detailed below:

### (c) Equivalent Continuous Sound Pressure Level (Leq):

Equivalent Continuous Sound Pressure Level, or Leq, is the constant noise level that would result in the same total sound energy being produced over a given period. It can be measured in either A, C or Z (Linear) modes. Leq is not an 'average sound level', as it sometimes referred to. The equations used to calculate Leq are not calculating a specific average level.

Leq can be described mathematically by the following equation:

$$L_{eq} = 10log_{10} \left( \frac{1}{T_{M}} \int_{0}^{M} \left( \frac{P(t)}{P_{0}} \right)^{2} dt \right)$$

Where:

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED. 9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

- Leq is the equivalent continuous linear weighted sound pressure level re 20μPa, determined over a measured time interval Tm (secs)
- P(t) is the instantaneous sound pressure of the sound signal
- P0 is the reference sound pressure of 20μPa

When the instantaneous A-weighted sound pressure (PA) of the sound signal is introduced the equivalent continuous A-weighted sound pressure level determined over time interval Tm is as follows:

$$L_{eq} = 10log_{10} \frac{1}{T_{M}} \int_{0}^{T_{M}} \left( \frac{P_{A}(t)}{P_{0}} \right)^{2} dt$$

In practice when measuring noise it is possible to take Leq readings, with your instrument, of short duration, i.e <5 minutes, providing all variations of noise emissions are covered. If the measured environment changes greatly then the longer the Leq measurement is taken the more accurate the measurement.

Adding Leq values requires taking an anti-log of each value. The addition can be performed as shown:

A weighting: the A-weighting

Total L<sub>eq</sub> = 
$$10log \left( \frac{10^{\frac{L_{eq}1}{10}} + 10^{\frac{L_{eq}2}{10}} + 10^{\frac{L_{eq}3}{10}} + \dots + 10^{\frac{L_{eq}n}{10}}}{n} \right)$$

filter covers the full audio range - 20 Hz to 20 kHz and the shape is similar to the response of the human ear at the lower levels.

A-weighted noise measurements are the most widely used and confirm the accuracy of the meter including the filters.

The preferred convention is to write LA = x dB, however dB A and dB (A) are often used, etc.,

C-weighting: a standard frequency weighting for sound level meters, commonly used for higher level measurements, it also written as dB(C) or dBC.

The A-weighting curve is used extensively for general purpose noise measurements but the C-weighting correlates better with the human response to high noise levels.

L50: If we consider any fluctuating noise levels and store the results once a second, then at the end of an hour we would have 3600 samples. We can then use these samples to determine some helpful statistics. For example if add up all the samples and divide by 3600 then we will get the average or L50% value of the noise over the hour.

L10: By definition the L10 value is the level just exceeded for 10% of the time and takes account of any annoying peaks of noise.

L90: By definition the L90 value is the level just exceeded for 90% of the time and takes account of any annoying peaks of noise.

L max is the highest RMS (root mean squared) sound pressure level within the measuring period.

L min is the lowest RMS sound pressure level within the measuring period.

L day is the total results during day time monitoring

L night is the total results during night time.

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED. 9, Bentinck Street, Kolkata – 700001.

Table: 3.1
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 27-28.02.2021

		Da	y Time	( 06:00 A	.M. to 10	:00 P.M.	)		
SI. No.	Date of Monitoring	Time		N	oise Lev	el in dB(	A)		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	27.02.2021	09:01 A.M 10:00 A.M.	58.1	60.3	71.2	55.4	76.0	67.2	75 dB(A)
2.		10:01 A.M 11:00 A.M.	58.9	64.1	72.3	55.7	85.2	71.2	
3.		11:01 A.M 12:00 P.M.	65.0	71.2	74.7	59.7	88.1	75.3	
4.		12:01 P.M 01:00 P.M.	70.7	71.9	76.4	68.5	89.9	76.1	
5.		01:01 P.M 02:00 P.M.	71.0	73.2	81.0	68.7	90.9	79.7	
6.		02:01 P.M 03:00 P.M.	67.1	74.2	83.8	67.6	91.7	81.2	
7.		03:01 P.M 04:00 P.M.	69.7	75.2	87.3	65.7	93.1	81.7	
8.		04:01 P.M 05:00 P.M.	66.1	70.0	76.1	67.2	89.6	76.0	
9.		05:01 P.M 06:00 P.M.	65.0	68.2	69.6	66.3	74.7	69.1	
10.		06:01 P.M 07:00 P.M.	69.5	69.9	71.9	65.2	78.2	72.3	
11.		07:01 P.M 08:00 P.M.	66.7	69.0	70.4	64.4	73.7	66.1	
12.		08:01 P.M 09:00 P.M.	67.1	65.2	69.1	65.2	75.7	67.4	
13.		09:01 P.M 10:00 P.M.	57.8	67.9	68.9	54.5	71.5	66.8	
14.	28.02.2021	06:01 A.M 07:00 A.M.	56.5	58.4	61.1	53.5	65.1	59.3	
15.		07:01 A.M 08:00 A.M.	55.0	59.3	65.3	53.8	68.9	61.4	
16.		08:01 A.M 09:00 A.M.	57.9	60.0	67.4	57.7	82.9	66.1	
		L(Day)	64.1	67.6	73.1	62.0	81.2	71.3	
				e ( 10:00 F				I	
17.	27.02.2021	10:01 P.M 11:00 P.M.	55.2	62.8	67.8	53.4	73.0	65.0	70 dB(A)
18.		11:01 P.M 00:00 A.M.	55.8	62.3	66.6	53.5	70.2	63.6	1
19.	28.02.2021	00:01 A.M 01:00 A.M.	57.4	63.5	68.7	54.3	76.1	65.8	1
20.		01:01 A.M 02:00 A.M.	60.0	64.4	68.7	56.4	72.9	65.8	1
21.		02:01 A.M 03:00 A.M.	58.8	63.9	67.8	55.1	71.3	65.1	
22.		03:01 A.M 04:00 A.M.	58.3	62.7	66.9	56.5	69.9	63.9	1
23.		04:01 A.M 05:00 A.M.	59.6	62.5	67.9	58.2	72.9	64.6	1
24.		05:01 A.M 06:00 A.M.	59.1	63.1	69.2	56.7	76.0	66.5	
		L(Night):	58.2	63.1	68.2	53.4	76.1	65.1	

# AMBIENT NOISE LEVEL OF SMP, KPD (NEAR DRY DOCK AREA-2) PRESENTED THROUGH HISTOGRAM

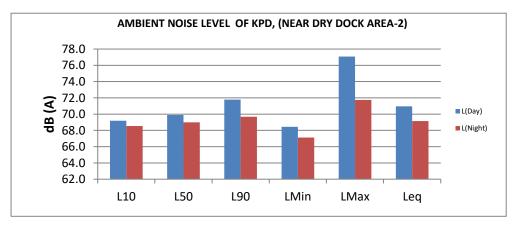


Table - 3.2
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22)

Date of Monitoring: 27-28.02.2021

SI. No.	Date of Monitoring	Time		'	Noise Leve	l in dB(A)			Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	under the Environment (Protection) Act, 1986)' for Industrial area
1.	27.02.2021	09:01 A.M 10:00 A.M.	72.2	73.5	76.1	63.2	85.2	75.9	75 dB(A)
2.		10:01 A.M 11:00 A.M.	72.6	74.1	75.6	72.1	81.4	75.2	
3.	]	11:01 A.M 12:00 P.M.	71.6	74.0	77.7	66.4	85.6	80.1	
4.		12:01 P.M 01:00 P.M.	72.4	73.5	75.5	71.8	80.1	74.2	
5.	]	01:01 P.M 02:00 P.M.	73.2	73.8	75.3	72.7	74.6	73.1	
6.	]	02:01 P.M 03:00 P.M.	73.5	73.9	74.5	73.1	76.6	74.1	
7.		03:01 P.M 04:00 P.M.	72.4	73.0	73.7	72.3	74.1	73.2	
8.		04:01 P.M 05:00 P.M.	72.6	72.4	72.1	72.4	74.4	73.0	
9.		05:01 P.M 06:00 P.M.	72.7	73.2	73.9	70.4	77.4	73.4	
10.		06:01 P.M 07:00 P.M.	72.7	73.1	72.2	72.2	74.7	73.2	
11.		07:01 P.M 08:00 P.M.	69.4	72.9	70.8	72.1	74.8	73.0	
12.		08:01 P.M 09:00 P.M.	72.3	72.6	72.2	72.5	78.0	73.2	
13.		09:01 P.M 10:00 P.M.	72.3	73.1	73.0	72.1	76.0	72.9	
14.	28.2.2021	06:01 A.M 07:00 A.M.	71.6	71.2	71.4	70.9	78.1	73.2	
15.		07:01 A.M 08:00 A.M.	70.0	70.9	76.0	70.6	77.5	71.9	
16.		08:01 A.M 09:00 A.M.	71.9	72.4	75.4	70.7	80.2	72.6	
		L(Day)	72.3	73.2	74.3	71.2	78.2	74.1	
				ne ( 10:00 P.)					
17.	27.02.2021	10:01 P.M 11:00 P.M.	63.8	67.3	67.0	65.7	67.5	66.9	70 dB(A)
18.		11:01 P.M 00:00 A.M.	64.7	65.4	68.1	65.6	68.0	66.5	
19.	28.02.2021	00:01 A.M 01:00 A.M.	65.9	65.2	65.7	65.5	67.1	66.3	
20.	1	01:01 A.M 02:00 A.M.	65.9	64.2	67.1	65.3	66.6	66.3	
21.	1	02:01 A.M 03:00 A.M.	66.2	65.2	67.8	65.3	75.2	71.7	
22.	]	03:01 A.M 04:00 A.M.	69.0	66.4	67.2	65.5	68.7	67.3	
23.		04:01 A.M 05:00 A.M.	66.6	66.1	66.5	66.5	70.4	68.6	
24.		05:01 A.M 06:00 A.M.	66.2	65.0	63.6	69.1	71.5	67.8	
		L(Night):	66.2	65.8	66.8	66.3	69.6	67.9	

### AMBIENT NOISE LEVEL OF SMP, KPD-2 (BESIDE SHED NO. 22) PRESENTED THROUGH HISTOGRAM

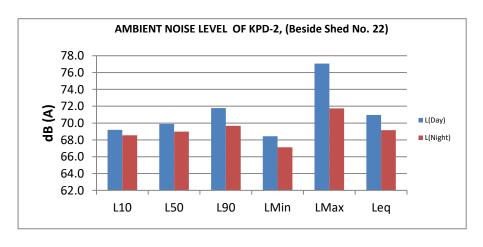


Table: 3.3
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near BERTH No.7)

Date of Monitoring: 27-28.02.2021

		Da	y Time (	06:00 A.I	VI. to 10:0	00 P.M.)			
SI. No.	Date of Monitoring	Time	Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment						
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$L_{eq}$	(Protection) Act, 1986)' for Industrial area
1.	27.02.2021	09:01 A.M 10:00 A.M.	55.4	57.0	66.3	53.5	75.3	64.7	75 dB(A)
2.		10:01 A.M 11:00 A.M.	55.9	58.8	66.7	55.1	79.6	66.3	
3.		11:01 A.M 12:00 P.M.	56.7	60.9	68.6	52.8	73.9	64.5	
4.		12:01 P.M 01:00 P.M.	56.0	57.1	64.9	54.6	77.6	67.0	
5.		01:01 P.M 02:00 P.M.	56.6	60.9	65.7	52.5	71.8	63.0	]
6.		02:01 P.M 03:00 P.M.	54.6	58.8	64.7	53.2	67.7	58.7	
7.		03:01 P.M 04:00 P.M.	53.5	55.6	67.5	50.4	70.9	62.4	
8.		04:01 P.M 05:00 P.M.	54.4	55.2	60.8	52.6	74.2	64.1	]
9.		05:01 P.M 06:00 P.M.	53.5	55.1	57.3	51.1	60.9	55.1	
10.		06:01 P.M 07:00 P.M.	54.1	55.3	59.1	52.1	63.9	56.8	
11.		07:01 P.M 08:00 P.M.	56.4	55.7	58.8	52.4	59.7	56.0	
12.		08:01 P.M 09:00 P.M.	54.7	56.3	58.4	52.3	64.7	59.0	
13.		09:01 P.M 10:00 P.M.	53.0	55.5	60.9	50.7	64.8	57.3	1
14.	28.02.2021	06:01 A.M 07:00 A.M.	54.6	57.1	66.3	52.2	81.1	65.4	
15.		07:01 A.M 08:00 A.M.	52.4	57.9	64.1	49.5	70.6	59.9	
16.		08:01 A.M 09:00 A.M.	54.6	58.7	66.3	51.4	84.4	64.5	]
		L(Day)	55.0	57.4	63.7	52.5	71.5	61.7	]
		Niş	ht Time	( 10:00 P.	M. to 06:0	0 A.M.)			
17.	27.02.2021	10:01 P.M 11:00 P.M.	53.6	58.2	60.0	49.2	63.6	57.7	70 dB(A)
18.		11:01 P.M 00:00 A.M.	54.4	54.5	59.4	48.3	70.7	58.0	
19.	28.02.2021	00:01 A.M 01:00 A.M.	52.6	54.2	56.7	50.3	66.3	60.1	
20.		01:01 A.M 02:00 A.M.	53.5	56.1	61.4	50.7	65.1	57.9	
21.		02:01 A.M 03:00 A.M.	54.7	55.7	59.1	46.2	62.8	53.1	
22.		03:01 A.M 04:00 A.M.	53.8	58.5	56.0	50.6	68.5	57.5	
23.		04:01 A.M 05:00 A.M.	51.1	54.4	57.2	48.5	63.3	56.4	
24.		05:01 A.M 06:00 A.M.	50.3	52.5	55.2	49.0	61.1	53.5	
		L(Night):	53.2	55.7	58.3	49.3	65.4	57.0	]

### AMBIENT NOISE LEVEL OF SMP, NSD (NEAR BERTH NO. 7) PRESENTED THROUGH HISTOGRAM

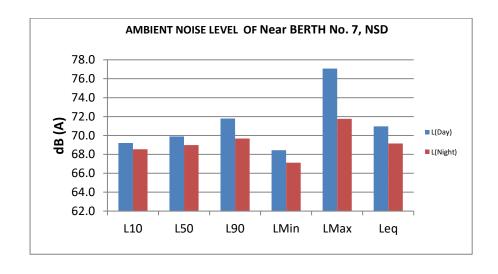


Table - 3.4
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near BERTH No. 3) Date of Monitoring: 27-28.02.2021

		Da	y Time (	06:00 A	M. to 10:	:00 P.M.	)		
SI.	Date of	Time		N	oise Lev	el in dB(	A)		Norms as per 'The Noise Pollution
No.	Monitoring		L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	27.02.2021	09:01 A.M 10:00 A.M.	60.1	65.4	73.2	58.8	78.9	69.5	75 dB(A)
2.		10:01 A.M 11:00 A.M.	58.0	62.1	69.1	57.3	71.4	64.6	
3.		11:01 A.M 12:00 P.M.	58.0	60.8	65.5	56.7	78.2	65.1	
4.		12:01 P.M 01:00 P.M.	59.7	65.1	74.4	58.6	84.2	71.5	
5.		01:01 P.M 02:00 P.M.	58.8	60.7	70.7	58.1	73.8	65.1	
6.		02:01 P.M 03:00 P.M.	57.8	59.2	62.1	57.2	75.3	61.7	
7.		03:01 P.M 04:00 P.M.	58.0	59.1	63.4	57.6	70.1	61.5	
8.		04:01 P.M 05:00 P.M.	58.4	59.2	63.2	58.0	74.7	63.6	
9.		05:01 P.M 06:00 P.M.	59.3	67.0	72.3	52.2	77.3	68.4	
10.		06:01 P.M 07:00 P.M.	60.0	65.0	70.7	52.1	79.4	67.9	
11.		07:01 P.M 08:00 P.M.	59.1	63.9	68.5	49.1	77.9	66.4	
12.		08:01 P.M 09:00 P.M.	55.4	62.1	67.4	48.3	77.9	65.3	
13.		09:01 P.M 10:00 P.M.	53.7	61.4	66.4	44.4	69.4	63.1	
14.	28.04.2021	06:01 A.M 07:00 A.M.	57.5	64.1	67.6	47.5	71.3	65.0	
15.		07:01 A.M 08:00 A.M.	58.4	65.3	70.6	53.9	76.4	67.8	
16.		08:01 A.M 09:00 A.M.	69.0	70.3	72.2	68.6	80.5	72.0	
		L(Day)	59.0	63.4	68.8	55.1	76.2	66.4	
		Ni	ght Time	(10:00 P	.M. to 06:	00 A.M.)			
17.	27.02.2021	10:01 P.M 11:00 P.M.	56.8	57.6	60.8	56.4	64.8	58.9	70 dB(A)
18.		11:01 P.M 00:00 A.M.	57.6	58.2	61.2	57.2	64.7	59.3	
19.	28.02.2021	00:01 A.M 01:00 A.M.	57.2	58.0	63.3	56.5	66.6	60.0	
20.		01:01 A.M 02:00 A.M.	57.7	58.5	62.4	56.5	67.1	60.1	
21.		02:01 A.M 03:00 A.M.	57.5	59.0	62.4	56.3	70.0	60.8	
22.		03:01 A.M 04:00 A.M.	66.7	67.1	67.9	66.4	68.6	67.2	
23.		04:01 A.M 05:00 A.M.	67.0	67.6	68.5	66.5	69.7	67.8	
24.		05:01 A.M 06:00 A.M.	67.2	67.8	68.5	57.9	70.4	67.9	
		L(Night):	61.2	61.9	64.6	59.4	67.9	63.0	

### AMBIENT NOISE LEVEL OF SMP, NSD (Near BERTH No. 3) PRESENTED THROUGH HISTOGRAM

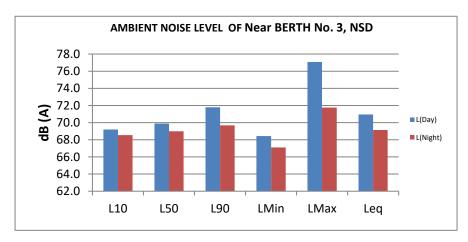


Table: 3.5
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 24-25.03.2021

		Da	y Time	( 06:00 A	.M. to 10	:00 P.M.	)		
SI. No.	Date of Monitoring	Time		N	oise Lev		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide		
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.03.2021	09:01 A.M 10:00 A.M.	57.3	59.5	70.4	54.6	75.2	66.4	75 dB(A)
2.		10:01 A.M 11:00 A.M.	58.4	63.6	71.8	55.2	84.7	70.7	
3.		11:01 A.M 12:00 P.M.	64.5	70.7	74.2	59.2	87.6	74.8	
4.		12:01 P.M 01:00 P.M.	70.2	71.4	75.9	68.0	89.4	75.6	
5.		01:01 P.M 02:00 P.M.	70.5	72.7	80.5	68.2	90.4	79.2	
6.		02:01 P.M 03:00 P.M.	66.6	73.7	83.3	67.1	91.2	80.7	
7.		03:01 P.M 04:00 P.M.	69.2	74.7	86.8	65.2	92.6	81.2	
8.		04:01 P.M 05:00 P.M.	65.6	69.5	75.6	66.7	89.1	75.5	
9.		05:01 P.M 06:00 P.M.	64.5	67.7	69.1	65.8	74.2	68.6	
10.		06:01 P.M 07:00 P.M.	69.0	69.4	71.4	64.7	77.7	71.8	
11.		07:01 P.M 08:00 P.M.	66.2	68.5	69.9	63.9	73.2	65.6	
12.		08:01 P.M 09:00 P.M.	66.6	64.7	68.6	64.7	75.2	66.9	
13.		09:01 P.M 10:00 P.M.	57.3	67.4	68.4	54.0	71.0	66.3	
14.	25.03.2021	06:01 A.M 07:00 A.M.	56.0	57.9	60.6	53.0	64.6	58.8	
15.		07:01 A.M 08:00 A.M.	54.5	58.8	64.8	53.3	68.4	60.9	
16.		08:01 A.M 09:00 A.M.	57.4	59.5	66.9	57.2	82.4	65.6	
		L(Day)	63.6	67.1	72.6	61.5	80.6	70.7	
					P.M. to 06			1	
17.	24.03.2021	10:01 P.M 11:00 P.M.	56.6	65.8	67.9	54.5	70.2	65.0	70 dB(A)
18.		11:01 P.M 00:00 A.M.	66.0	67.1	70.0	63.9	73.0	68.1	
19.	25.03.2021	00:01 A.M 01:00 A.M.	65.3	66.3	66.4	64.7	69.7	66.7	
20.		01:01 A.M 02:00 A.M.	66.9	64.4	69.6	63.4	72.3	68.3	
21.		02:01 A.M 03:00 A.M.	40.9	51.8	74.3	37.2	89.6	72.6	
22.		03:01 A.M 04:00 A.M.	38.0	49.4	64.1	33.3	75.3	61.3	
23.		04:01 A.M 05:00 A.M.	50.5	54.5	69.0	47.4	78.0	64.7	
24.		05:01 A.M 06:00 A.M.	51.0	57.8	69.3	49.0	71.5	64.3	
		L(Night):	54.6	59.8	69.0	51.9	75.2	66.6	

### AMBIENT NOISE LEVEL OF SMP, KPD (Near Dry Dock Area-2) PRESENTED THROUGH HISTOGRAM

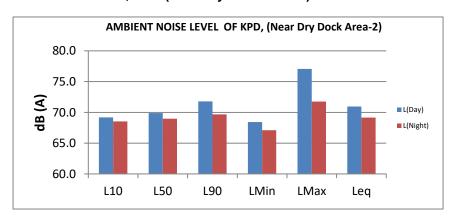


Table - 3.6
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22)

Date of Monitoring: 24-25.03.2021

SI. No.	Date of Monitoring	Time		'	Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010				
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.03.2021	09:01 A.M 10:00 A.M.	71.4	72.7	75.3	62.4	84.4	75.1	75 dB(A)
2.		10:01 A.M 11:00 A.M.	71.8	73.3	74.8	71.3	80.6	74.4	
3.		11:01 A.M 12:00 P.M.	70.8	73.2	76.9	65.6	84.8	79.3	
4.		12:01 P.M 01:00 P.M.	71.6	72.7	74.7	71.0	79.3	73.4	
5.		01:01 P.M 02:00 P.M.	72.4	73.0	74.5	71.9	73.8	72.3	
6.		02:01 P.M 03:00 P.M.	72.7	73.1	73.7	72.3	75.8	73.3	
7.		03:01 P.M 04:00 P.M.	71.6	72.2	72.9	71.5	73.3	72.4	
8.		04:01 P.M 05:00 P.M.	71.8	71.6	71.3	71.6	73.6	72.2	
9.		05:01 P.M 06:00 P.M.	71.9	72.4	73.1	69.6	76.6	72.6	
10.		06:01 P.M 07:00 P.M.	71.9	72.3	71.4	71.4	73.9	72.4	
11.		07:01 P.M 08:00 P.M.	68.6	72.1	70.0	71.3	74.0	72.2	
12.		08:01 P.M 09:00 P.M.	71.5	71.8	71.4	71.7	77.2	72.4	
13.		09:01 P.M 10:00 P.M.	71.5	72.3	72.2	71.3	75.2	72.1	
14.	25.03.2021	06:01 A.M 07:00 A.M.	70.8	70.4	70.6	70.1	77.3	72.4	
15.		07:01 A.M 08:00 A.M.	69.2	70.1	75.2	69.8	76.7	71.1	
16.		08:01 A.M 09:00 A.M.	71.1	71.6	74.6	69.9	79.4	71.8	
		L(Day)	71.5	72.4	73.5	70.4	77.4	73.3	
				ne ( 10:00 P.)			,		
17.	24.03.2021	10:01 P.M 11:00 P.M.	64.4	67.9	67.6	66.3	68.1	67.5	70 dB(A)
18.		11:01 P.M 00:00 A.M.	65.3	66.0	68.7	66.2	68.6	67.1	
19.	25.03.2021	00:01 A.M 01:00 A.M.	66.5	65.8	66.3	66.1	67.7	66.9	
20.		01:01 A.M 02:00 A.M.	66.5	64.8	67.7	65.9	67.2	66.9	
21.		02:01 A.M 03:00 A.M.	66.8	65.8	68.4	65.9	75.8	72.3	
22.		03:01 A.M 04:00 A.M.	69.6	67.0	67.8	66.1	69.3	67.9	
23.		04:01 A.M 05:00 A.M.	67.2	66.7	67.1	67.1	71.0	69.2	
24.		05:01 A.M 06:00 A.M.	66.8	65.6	64.2	69.7	72.1	68.4	
		L(Night):	66.8	66.4	67.4	66.9	70.2	68.5	

### AMBIENT NOISE LEVEL OF SMP, KPD-2 (Beside Shed No. 22) PRESENTED THROUGH HISTOGRAM

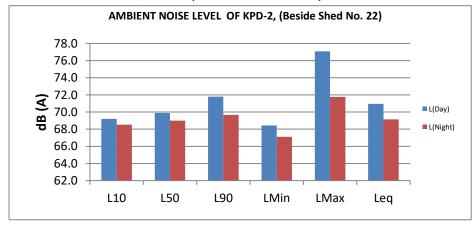


Table: 3.7
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near Gate No. 7)

Date of Monitoring: 24-25.03.2021

		Dag	y Time (	06:00 A.I	M. to 10:0	00 P.M.)			
SI. No.	Date of Monitoring	Time	Noise Level in dB(A)						Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$L_{eq}$	(Protection) Act, 1986)' for Industrial area
1.	24.03.2021	09:01 A.M 10:00 A.M.	56.1	57.7	67.0	54.2	76.0	65.4	75 dB(A)
2.		10:01 A.M 11:00 A.M.	56.6	59.5	67.4	55.8	80.3	67.0	
3.		11:01 A.M 12:00 P.M.	57.4	61.6	69.3	53.5	74.6	65.2	
4.		12:01 P.M 01:00 P.M.	56.7	57.8	65.6	55.3	78.3	67.7	
5.		01:01 P.M 02:00 P.M.	57.3	61.6	66.4	53.2	72.5	63.7	
6.		02:01 P.M 03:00 P.M.	55.3	59.5	65.4	53.9	68.4	59.4	
7.		03:01 P.M 04:00 P.M.	54.2	56.3	68.2	51.1	71.6	63.1	
8.		04:01 P.M 05:00 P.M.	55.1	55.9	61.5	53.3	74.9	64.8	
9.		05:01 P.M 06:00 P.M.	54.2	55.8	58.0	51.8	61.6	55.8	
10.		06:01 P.M 07:00 P.M.	54.8	56.0	59.8	52.8	64.6	57.5	
11.		07:01 P.M 08:00 P.M.	57.1	56.4	59.5	53.1	60.4	56.7	
12.		08:01 P.M 09:00 P.M.	55.4	57.0	59.1	53.0	65.4	59.7	
13.		09:01 P.M 10:00 P.M.	53.7	56.2	61.6	51.4	65.5	58.0	
14.	25.03.2021	06:01 A.M 07:00 A.M.	55.3	57.8	67.0	52.9	81.8	66.1	
15.		07:01 A.M 08:00 A.M.	53.1	58.6	64.8	50.2	71.3	60.6	
16.		08:01 A.M 09:00 A.M.	55.3	59.4	67.0	52.1	85.1	65.2	
		L(Day)	55.7	58.1	64.4	53.2	72.2	62.4	
		Nig	ght Time	( 10:00 P.)	M. to 06:0	0 A.M.)			
17.	24.03.2021	10:01 P.M 11:00 P.M.	54.4	59.0	60.8	50.0	64.4	58.5	70 dB(A)
18.		11:01 P.M 00:00 A.M.	55.2	55.3	60.2	49.1	71.5	58.8	
19.	25.03.2021	00:01 A.M 01:00 A.M.	53.4	55.0	57.5	51.1	67.1	60.9	
20.		01:01 A.M 02:00 A.M.	54.3	56.9	62.2	51.5	65.9	58.7	
21.		02:01 A.M 03:00 A.M.	55.5	56.5	59.9	47.0	63.6	53.9	
22.		03:01 A.M 04:00 A.M.	54.6	59.3	56.8	51.4	69.3	58.3	
23.		04:01 A.M 05:00 A.M.	51.9	55.2	58.0	49.3	64.1	57.2	
24.		05:01 A.M 06:00 A.M.	51.1	53.3	56.0	49.8	61.9	54.3	
		L(Night):	54.0	56.5	59.1	50.1	66.2	57.8	

AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 7) PRESENTED THROUGH HISTOGRAM

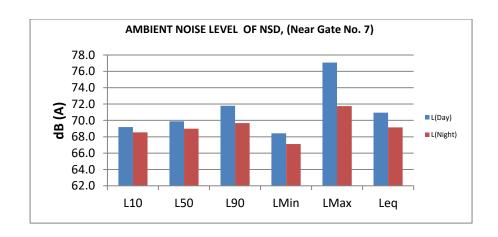


Table - 3.8

RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near Gate No. 3) Date of Monitoring: 24-25.03.2021

		Da	y Time (	06:00 A.	M. to 10:	:00 P.M.)	)		
SI.	Date of	Time		N	oise Lev	el in dB(	A)		Norms as per 'The Noise Pollution
No.	Monitoring		L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.03.2021	09:01 A.M 10:00 A.M.	59.7	65.0	72.8	58.4	78.5	69.1	75 dB(A)
2.		10:01 A.M 11:00 A.M.	57.6	61.7	68.7	56.9	71.0	64.2	
3.		11:01 A.M 12:00 P.M.	57.6	60.4	65.1	56.3	77.8	64.7	
4.		12:01 P.M 01:00 P.M.	59.3	64.7	74.0	58.2	83.8	71.1	
5.		01:01 P.M 02:00 P.M.	58.4	60.3	70.3	57.7	73.4	64.7	
6.		02:01 P.M 03:00 P.M.	57.4	58.8	61.7	56.8	74.9	61.3	
7.		03:01 P.M 04:00 P.M.	57.6	58.7	63.0	57.2	69.7	61.1	
8.		04:01 P.M 05:00 P.M.	58.0	58.8	62.8	57.6	74.3	63.2	
9.		05:01 P.M 06:00 P.M.	58.9	66.6	71.9	51.8	76.9	68.0	
10.		06:01 P.M 07:00 P.M.	59.6	64.6	70.3	51.7	79.0	67.5	
11.		07:01 P.M 08:00 P.M.	58.7	63.5	68.1	48.7	77.5	66.0	
12.		08:01 P.M 09:00 P.M.	55.0	61.7	67.0	47.9	77.5	64.9	
13.		09:01 P.M 10:00 P.M.	53.3	61.0	66.0	44.0	69.0	62.7	
14.	25.03.2021	06:01 A.M 07:00 A.M.	57.1	63.7	67.2	47.1	70.9	64.6	
15.		07:01 A.M 08:00 A.M.	58.0	64.9	70.2	53.5	76.0	67.4	
16.		08:01 A.M 09:00 A.M.	68.6	69.9	71.8	68.2	80.1	71.6	
		L(Day)	58.6	63.0	68.4	54.7	75.8	66.0	
		Ni	ght Time	( 10:00 P	.M. to 06:	00 A.M.)			
17.	24.03.2021	10:01 P.M 11:00 P.M.	58.5	59.3	62.5	58.1	66.5	60.6	70 dB(A)
18.		11:01 P.M 00:00 A.M.	59.3	59.9	62.9	58.9	66.4	61.0	
19.	25.03.2021	00:01 A.M 01:00 A.M.	58.9	59.7	65.0	58.2	68.3	61.7	
20.		01:01 A.M 02:00 A.M.	59.4	60.2	64.1	58.2	68.8	61.8	
21.		02:01 A.M 03:00 A.M.	59.2	60.7	64.1	58.0	71.7	62.5	
22.		03:01 A.M 04:00 A.M.	68.4	68.8	69.6	68.1	70.3	68.9	
23.		04:01 A.M 05:00 A.M.	68.7	69.3	70.2	68.2	71.4	69.5	
24.		05:01 A.M 06:00 A.M.	68.9	69.5	70.2	59.6	72.1	69.6	
	·	L(Night):	62.9	63.6	66.3	61.1	69.6	64.7	

### AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 3) PRESENTED THROUGH HISTOGRAM

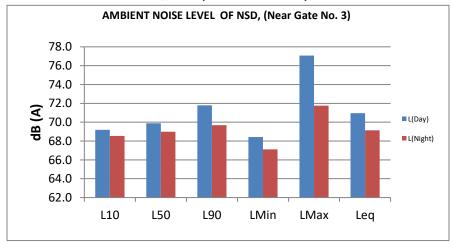


Table: 3.9
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 24-25.04.2021

		Da			.M. to 10				ng. 24 20.04.2021
SI. No.	Date of Monitoring	Time		N	oise Lev	Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide			
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.04.2021	09:01 A.M 10:00 A.M.	58.4	60.8	71.3	55.8	76.2	67.3	75 dB(A)
2.		10:01 A.M 11:00 A.M.	59.3	64.9	72.9	56.2	85.7	71.7	
3.		11:01 A.M 12:00 P.M.	69.6	71.7	75.3	60.2	89.6	75.8	
4.		12:01 P.M 01:00 P.M.	71.2	72.1	77.0	69.0	90.6	76.1	
5.		01:01 P.M 02:00 P.M.	70.5	73.2	82.2	68.2	90.4	79.5	
6.		02:01 P.M 03:00 P.M.	70.6	74.7	85.1	69.1	92.2	80.3	
7.		03:01 P.M 04:00 P.M.	69.8	74.1	85.8	65.1	93.1	82.2	_
8.		04:01 P.M 05:00 P.M.	68.6	70.6	76.9	65.7	90.1	76.5	
9.		05:01 P.M 06:00 P.M.	67.5	69.1	72.1	65.8	75.2	70.0	
10.		06:01 P.M 07:00 P.M.	68.0	69.3	71.4	65.7	80.2	70.8	_
11.		07:01 P.M 08:00 P.M.	66.8	68.2	69.7	64.7	72.3	68.4	
12.		08:01 P.M 09:00 P.M.	66.6	67.7	68.6	64.2	74.3	68.0	
13.		09:01 P.M 10:00 P.M.	57.8	67.3	68.4	53.8	71.0	66.4	
14.	25.04.2021	06:01 A.M 07:00 A.M.	56.0	57.9	61.6	52.4	65.2	58.8	
15.		07:01 A.M 08:00 A.M.	56.6	59.4	63.8	53.6	68.6	60.9	
16.		08:01 A.M 09:00 A.M.	57.6	59.5	69.1	55.2	81.5	68.0	
		L(Day)	64.9	67.7	73.4	61.7	81.2	71.5	
	1				P.M. to 06			1	T
17.	24.04.2021	10:01 P.M 11:00 P.M.	57.6	67.8	68.9	55.6	70.0	67.0	70 dB(A)
18.		11:01 P.M 00:00 A.M.	67.0	68.3	71.0	64.6	73.9	69.1	
19.	25.04.2021	00:01 A.M 01:00 A.M.	66.4	67.7	68.9	64.8	69.8	67.7	-
20.		01:01 A.M 02:00 A.M.	67.0	68.2	70.7	64.4	72.7	68.7	
21.		02:01 A.M 03:00 A.M.	40.6	52.8	75.3	37.2	88.6	73.4	-
22.		03:01 A.M 04:00 A.M.	37.6	49.4	63.1	34.3	76.3	61.8	-
23.		04:01 A.M 05:00 A.M.	49.8	55.5	69.0	48.5	78.0	64.7	-
24.		05:01 A.M 06:00 A.M.	50.7	56.5	69.5	49.0	72.5	64.6	-
		L(Night):	54.8	61.0	69.8	52.5	75.4	67.3	

## AMBIENT NOISE LEVEL OF SMP, KPD (NEAR DRY DOCK AREA-2) PRESENTED THROUGH HISTOGRAM


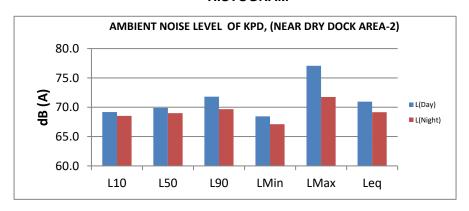


Table - 3.10
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22) Date of Monitoring: 24-25.04.2021

	<u>.</u> ,	2 (Deside Siled No.		( 06:00 A.I	M. to 10:00				illig. 24-25.04.2021
SI. No.	Date of Monitoring	Time		ı	Noise Leve	Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide			
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.042021	09:01 A.M 10:00 A.M.	71.9	73.9	79.5	62.1	86.7	76.5	75 dB(A)
2.		10:01 A.M 11:00 A.M.	72.3	72.6	73.6	72.1	76.2	72.9	
3.		11:01 A.M 12:00 P.M.	72.5	72.9	73.9	72.2	81.0	73.7	
4.		12:01 P.M 01:00 P.M.	72.5	72.8	73.1	72.4	75.6	72.9	
5.		01:01 P.M 02:00 P.M.	72.6	72.8	73.1	72.5	74.8	72.9	
6.		02:01 P.M 03:00 P.M.	72.7	72.9	73.0	72.6	74.0	72.9	
7.		03:01 P.M 04:00 P.M.	72.8	72.9	73.1	72.6	73.8	72.9	
8.		04:01 P.M 05:00 P.M.	72.7	72.9	73.3	72.5	75.0	73.0	
9.		05:01 P.M 06:00 P.M.	72.6	72.8	73.6	72.4	79.5	73.2	
10.		06:01 P.M 07:00 P.M.	72.5	72.7	73.0	72.4	77.4	72.9	
11.		07:01 P.M 08:00 P.M.	72.5	72.6	72.8	72.4	73.3	72.7	
12.		08:01 P.M 09:00 P.M.	72.5	72.8	73.3	72.3	74.6	72.9	
13.		09:01 P.M 10:00 P.M.	70.3	73.0	73.4	70.0	74.7	72.8	
14.	25.04.2021	06:01 A.M 07:00 A.M.	70.6	71.0	73.1	70.1	78.3	72.0	
15.		07:01 A.M 08:00 A.M.	71.7	72.2	75.1	71.5	90.6	75.8	
16.		08:01 A.M 09:00 A.M.	71.7	71.9	72.4	71.4	77.7	72.3	
		L(Day)	72.4	72.9	73.9	71.5	77.9	73.5	
17	24.04.2021	10.01 PM 11.00 PM		e ( 10:00 P.I			05.0	044	50 ID(A)
17.	24.04.2021	10:01 P.M 11:00 P.M.	63.5	64.0	64.6	63.2	65.2	64.1	70 dB(A)
18.	25.04.2021	11:01 P.M 00:00 A.M.	63.5	64.2	64.7	63.1	65.7	64.2	
19.	25.04.2021	00:01 A.M 01:00 A.M.	63.4	63.9	64.5	63.2	64.8	64.0	
20.	-	01:01 A.M 02:00 A.M. 02:01 A.M 03:00 A.M.	63.2	63.9	64.6	63.0	65.7	64.0	
21.	-	02:01 A.M 03:00 A.M. 03:01 A.M 04:00 A.M.	63.3	63.9	65.5	63.0	73.2	65.2	
23.	-	03:01 A.M 04:00 A.M. 04:01 A.M 05:00 A.M.	63.4	64.1	64.9	63.2	66.6	64.2	
24.	-	04:01 A.M 05:00 A.M. 05:01 A.M 06:00 A.M.	63.3	63.8	64.4	62.9	67.2	63.9	
24.		US:01 A.M 06:00 A.M. L(Night) :	63.8	65.3	67.1	62.7	67.9	65.5	
		L(Mgnt):	63.6	64.3	65.2	63.2	67.2	64.6	

### AMBIENT NOISE LEVEL OF SMP, KPD-2 (BESIDE SHED NO. 22) PRESENTED THROUGH HISTOGRAM

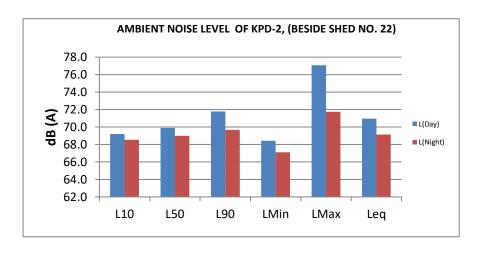


**Table: 3.11 RESULTS OF AMBIENT NOISE LEVEL MONITORING** 

Date of Monitoring: 24-25.04.2021

		Da	y Time (	06:00 A.I	M. to 10:0	00 P.M.)			
SI. No.	Date of Monitoring	Time	Noise Level in dB(A)						Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$L_{eq}$	(Protection) Act, 1986)' for Industrial area
1.	24.04.2021	09:01 A.M 10:00 A.M.	59.7	65.0	72.8	58.4	78.5	69.1	75 dB(A)
2.		10:01 A.M 11:00 A.M.	57.6	61.7	68.7	56.9	71.0	64.2	
3.	_	11:01 A.M 12:00 P.M.	57.6	60.4	65.1	56.3	77.8	64.7	
4.	_	12:01 P.M 01:00 P.M.	59.3	64.7	74.0	58.2	83.8	71.1	
5.	_	01:01 P.M 02:00 P.M.	58.4	60.3	70.3	57.7	73.4	64.7	
6.	_	02:01 P.M 03:00 P.M.	57.4	58.8	61.7	56.8	74.9	61.3	
7.	4	03:01 P.M 04:00 P.M.	57.6	58.7	63.0	57.2	69.7	61.1	
8.	4	04:01 P.M 05:00 P.M.	58.0	58.8	62.8	57.6	74.3	63.2	
9.	4	05:01 P.M 06:00 P.M.	58.5	59.6	62.7	58.1	69.1	60.9	
10.	4 -	06:01 P.M 07:00 P.M.	58.2	58.9	61.3	57.8	65.1	59.9	
11.	4 -	07:01 P.M 08:00 P.M.	58.8	59.4	66.1	58.4	71.6	62.4	
12.	-	08:01 P.M 09:00 P.M.	58.2	58.8	62.7	57.9	76.9	62.5	
13.	25.04.2021	09:01 P.M 10:00 P.M.	58.3	58.9	63.7	57.6	79.1 72.2	65.1	
14. 15.	25.04.2021	06:01 A.M 07:00 A.M.	55.5 55.7	60.2 58.4	65.3 65.3	54.9 54.5	78.0	62.7 65.2	-
16.	-	07:01 A.M 08:00 A.M. 08:01 A.M 09:00 A.M.	58.3	65.8	74.8	57.0	77.2	68.4	1
10.		L(Day)	58.1	60.7	66.5	57.4	74.7	64.4	1
					M. to 06:0		74.7	04.4	
17.	24.04.2021	10:01 P.M 11:00 P.M.	58.5	59.3	62.5	58.1	66.5	60.6	70 dB(A)
18.		11:01 P.M 00:00 A.M.	59.3	59.9	62.9	58.9	66.4	61.0	
19.	25.04.2021	00:01 A.M 01:00 A.M.	58.9	59.7	65.0	58.2	68.3	61.7	
20.	] [	01:01 A.M 02:00 A.M.	59.4	60.2	64.1	58.2	68.8	61.8	
21.	_] [	02:01 A.M 03:00 A.M.	59.2	60.7	64.1	58.0	71.7	62.5	
22.	]	03:01 A.M 04:00 A.M.	59.0	60.0	65.8	58.4	72.7	63.4	
23.	_] [	04:01 A.M 05:00 A.M.	57.2	58.6	64.8	56.9	70.9	62.1	
24.		05:01 A.M 06:00 A.M.	57.0	58.1	62.1	56.4	63.5	59.4	
		L(Night):	58.8	59.8	64.1	58.1	68.8	61.8	

### AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 7) PRESENTED THROUGH HISTOGRAM

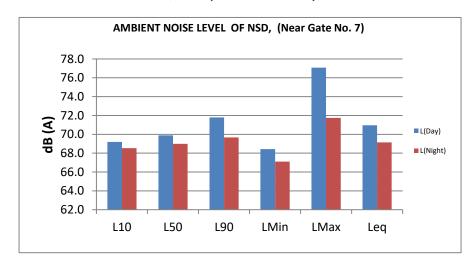

Location: SMP, NSD (Near Gate No. 7)

Table - 3.13
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near Gate No. 3) Date of Monitoring: 24-25.04.2021

		Da	y Time (	06:00 A	M. to 10:	:00 P.M.)	)		
SI.	Date of	Time		N	oise Lev	el in dB(	A)		Norms as per 'The Noise Pollution
No.	Monitoring		L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	24.04.2021	09:01 A.M 10:00 A.M.	70.2	70.8	72.7	62.6	84.6	73.4	75 dB(A)
2.		10:01 A.M 11:00 A.M.	70.4	71.3	76.1	70.0	79.1	73.0	
3.		11:01 A.M 12:00 P.M.	70.4	71.4	73.9	69.9	79.4	72.3	
4.		12:01 P.M 01:00 P.M.	70.1	70.8	73.1	69.6	80.6	72.2	
5.		01:01 P.M 02:00 P.M.	69.7	70.1	70.9	69.5	73.3	70.3	
6.		02:01 P.M 03:00 P.M.	68.4	69.0	70.3	68.1	72.9	69.5	
7.		03:01 P.M 04:00 P.M.	68.3	68.6	69.3	68.0	73.3	68.9	
8.		04:01 P.M 05:00 P.M.	68.2	68.5	69.8	68.0	80.4	69.6	
9.		05:01 P.M 06:00 P.M.	68.3	68.8	69.2	68.0	75.1	69.0	
10.		06:01 P.M 07:00 P.M.	68.4	68.9	69.6	68.2	70.4	69.0	
11.		07:01 P.M 08:00 P.M.	68.3	69.0	69.7	68.2	72.5	69.2	
12.		08:01 P.M 09:00 P.M.	68.2	68.8	69.6	68.0	73.3	69.0	
13.		09:01 P.M 10:00 P.M.	68.2	68.8	69.6	68.0	70.4	69.0	
14.	25.04.2021	06:01 A.M 07:00 A.M.	69.2	69.8	74.4	68.7	79.4	71.9	
15.		07:01 A.M 08:00 A.M.	69.0	70.6	75.4	68.7	85.2	74.2	
16.		08:01 A.M 09:00 A.M.	68.6	69.9	71.8	68.2	80.1	71.6	
		L(Day)	69.2	69.9	71.8	68.4	77.1	71.0	
		Ni	ght Time	(10:00 P	.M. to 06:	00 A.M.)			
17.	24.04.2021	10:01 P.M 11:00 P.M.	68.2	68.7	69.4	67.9	70.8	68.9	70 dB(A)
18.		11:01 P.M 00:00 A.M.	68.2	68.6	69.2	68.0	71.2	68.7	
19.	25.04.2021	00:01 A.M 01:00 A.M.	68.1	68.5	68.9	67.9	71.4	68.6	
20.		01:01 A.M 02:00 A.M.	68.1	68.4	68.9	67.8	71.0	68.5	
21.		02:01 A.M 03:00 A.M.	68.1	68.5	69.4	67.8	74.2	68.9	
22.		03:01 A.M 04:00 A.M.	68.4	68.8	69.6	68.1	70.3	68.9	
23.		04:01 A.M 05:00 A.M.	68.7	69.3	70.2	68.2	71.4	69.5	
24.		05:01 A.M 06:00 A.M.	68.9	69.5	70.2	59.6	72.1	69.6	
		L(Night):	68.5	69.0	69.7	67.1	71.8	69.1	

### AMBIENT NOISE LEVEL OF SMP, NSD (NEAR GATE NO. 3) PRESENTED THROUGH HISTOGRAM

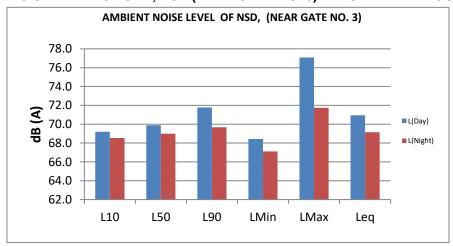


TABLE 3.12

NATIONAL AMBIENT NOISE LEVEL STANDARD

LIMITS IN d (B) A Leq									
AREA CODE	CATEGORY OF AREA	DAY TIME	NIGHT TIME						
А	INDUSTRIAL AREA	75	70						
В	COMMERCIAL AREA	65	55						
С	RESIDENTIAL AREA	55	45						
D	SILENCE ZONE	50	40						

### Note:

- 1. Day time is reckoned in between 6 a.m and 10 p.m
- 2. Night time is reckoned in between 10 p.m and 6 a.m
- 3. Silence zone is an area comprising not less than 100 metres around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority.
- 4. Mixed categories areas may be declared "as one of the four" above mentioned categories, by the Competent Authority.
- 5. dB (A) Leq denotes the time weighted average of the level of sound in decibels in scale A, which is relatable to human hearing. A "decibel" is a unit in which the noise is measured.
- "A", in dB (A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.

Leq: It is energy mean of the noise level over a specified period.

### Source.

The Principal Rules were published in the Gazette of India, vide no. S.O 123 (E), dated 14<sup>th</sup> February 2000 and subsequently amended vise S.O 1046 (E), dated 22<sup>nd</sup> November, 2000, S.O 1088 (E), dated 11<sup>th</sup> October, 2002, S.O (1569 (E), dated the 19<sup>th</sup> September, 2006 and S.O 50 (E) dated 11<sup>th</sup> January, 2010.

Chapter - 4

### 4.0 CHARACTERIZATIONS OF DRINKING WATER SAMPLES

### 4.1.0Objective:

Most important aim was to get an idea about the quality of the collected water samples, which were mainly used, for drinking purposes. The sampling of twosurface water sample,3 ground water samples and also collection of 3 supply water samples were carried out on July 10, 2020. The collected samples were analysed at the laboratory of R.V.Briggs at Kolkata.

### 4.2.0 Drinking Water Characterization:

### **Assessment:**

The drinking water quality was assessed for the following parameters:

- Total Coliform Organisms
- Faecal Coliform Organism
- pH
- Colour
- Turbidity
- Chloride
- Residual Chlorine
- Total Dissolved Solid

### 4.3.0 Plan of Sampling:

The details of the water sampling sites are as follows.

- (i) NS Dock Office
- (ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap
- (iii) Remount Road Quarter, 9 No. Civil Site Office
- (iv) Port Land Park Quarter, Civil Site Office
- (v) SMP Hospital, (KOL) Canteen # 09
- (vi) Canteen Aquaguard
- (vii) NS Dock Office, (Terminal)
- (viii) SMP Dock Office

### 4.5.0 Laboratory Determinations:

Bacteriological Count: The determination of Total coliform & Faecal Coliform count carried out according to the method prescribed by APHA 23rd Edn. 9222 B & APHA 23rd Edn. 9222 D respectively.

pH value: The pH value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication ( $22^{nd}$  edition – 1550 H + B).

Colour: The colour value was calculated in the laboratory according to the method prescribed IS: 3025-(part-4): 1983 Reaffirmed 2012.

Turbidity: The turbidity value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-10): 1984 Reaffirmed 2012.

Chloride: The chloride value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-32): 1988 Reaffirmed 2009.

Residual Chlorine: The residual chlorine value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-26): 1986 Reaffirmed 2009.

Total Dissolved Solid: The TDS value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-16): 1984 Reaffirmed 2012.

### **REPORT OF DRINKING WATER**

**Table - 4.1** 

Parameters	Report ID No. W(D)/20- 21/2725	Report ID No. W(D)/20- 21/2726	Report ID No. W(D)/20- 21/2727	Report ID No. W(D)/20- 21/2728
Coliform Organism	Absent	Absent	Absent	Absent
Faecal Coliform	Absent	Absent	Absent	Absent
Colour	1	1	1	1
Turbidity	< 1	< 1	<1	< 1
pH value	7.5	7.5	7.6	7.6
Total Dissolved Solids	236	412	248	240
Chloride as Cl	21	103	23	21
Residual Free Chlorine	< 0.1	< 0.1	< 0.1	< 0.1

**Table - 4.2** 

Parameters	Report ID No. W(D)/20- 21/2729	Report ID No. W(D)/20- 21/2730	Report ID No. W(D)/20- 21/2731	Report ID No. W(D)/20- 21/2732
Coliform Organism	Absent	Absent	Absent	Absent
Faecal Coliform	Absent	Absent	Absent	Absent
Colour	1	1	1	1
Turbidity	< 1	< 1	<1	<1
pH value	7.6	8.3	7.9	7.7
Total Dissolved Solids	252	412	244	236
Chloride as Cl	23	101	21	19
Residual Free Chlorine	< 0.1	< 0.1	< 0.1	< 0.1

### 4.9.1. Assessment of analytical Results against Standards:

As the above mentioned supply water samples were used mostly for drinking water and also for cooking purposes, So, the assessment was carried out as per the stipulated Standards of IS: 1622 (1981) for Bacteriological parameters and IS: 10,500 (2012) 2<sup>nd</sup> revision for other parameters respectively as specified by MoEF, Government of India:

### (a) Bacteriological Parameters:

The count of bacteriological parameters in terms of Total coliform count and Faecal (E.coli) Coliform Organisms were absent and are safe to consume in the collected samples.

### (b) Organoleptic and Physical Parameters:

pH, Turbidity and Total Dissolved Solids were within their respective acceptable limits.

Table - 4.3
NATIONAL DRINKING WATER STANDARD

Parameters	Norms as per IS: 10500, 2012 (2nd Rev.)				
Coliform Organism	Absen	t in 100 ml			
Faecal Coliform	Absent				
Colour	5 Max.	15 Max.			
Turbidity	1.0 Max.	5.0 Max.			
pH value	6.5 - 8.5	No Relaxation			
Total Dissolved Solids	500 Max.	2000 Max.			
Chloride as Cl	250 Max.	1000 Max.			
Residual Free Chlorine	0.2 min	1 Max.			

5.0 CHARACTERIZATIONS OF SURFACE WATERQUALITY

5.1 Dock Basin & River Water Characterization:

**5.1.1 Objective**: The main purpose of the study was to get an idea about the quality of Dock Basin & River

water within the area of study. All together 4 Dock Basin warter samples and 2 River water samples were

collected and were analysed within our present area of study.

Four (04) Dock Basin samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-

28 KPD) and from (iv) KPD 1 (11 KPD) respectively.

Two (02) River water samples were collected from (i) Outside of NS Dock Basin on RIver, (ii) Outside of KP

Dock Basin on River.

5.1.2 Dock Basin & River water character of the present study areas were assessed in terms

of the following structure:

(a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count

(b) Organoleptic and Physical Parameters:

i) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids

(c) General Parameters Concerning Substances undesirable in Excessive Amounts:

(i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii)

COD.

5.1.3: Plan of Sampling:

Altogether Dock Basin warter samples and 2 River water samples were collected from the locations

mentioned above (4.8.1). Major groundwater sources, the details of the water sampling sites were given in

the Table 4.3 a to 4.3 c.

5.1.4 Sampling Procedure:

For each location three water samples were collected (Plate - 5) for the following analysis: (i)

Bacteriological analysis: The sample was collected in a pre-sterilised 250 ml. water bottle, wearing

throwaway gloves. The sample bottles were previously sterilized by autoclaving. Two layers of papers

covered the stopper and the neck of bottle, prior to sterilization. The opening and closing of the bottles in the

process of sample collection was carried out with meticulous care to avoid any bacterial contamination from

outside source. When water was collected from tube well, the mouth of the tube well was flamed for 10

minutes, and the water was allowed to run for 5 minutes before filling the bottle. The bottle was filled up to

neck leaving 3 inches air space vertically below the glass stopper. Immediately after collection, the samples

were transported to the R.V.Briggs laboratory in an ice – box, which was kept in temperatures within 4°C.

While for determination of other parameters like: *non-metals*:Colour, pH value,Turbidity, Total Dissolved Solids, Total Suspended Solids, Dissolved Oxyzen, Salinity, Ammoniacal Nitrogen, Sulphate, oil & Grease, BOD, COD a total quantity of 2.0 Liters of effluent was collected from the locations in separated bottles. Before collection, the containers were washed with the sample water with vigorous shake. Then the samplings were carried out from 60 cm deep inside .(i) In a dusky glass bottle of 1 litre capacity the sample was collected for determination of Oil & Grease. (ii) Second sample was collected in a plastic container of 1 litre capacity for testing of its pH, Total Suspended Solids, Chemical Oxygen Demand & Bio Chemical Oxygen Demand. The D.O for the sample was measured at the sampling site. After collection, the samples were immediately transported to the R.V.Brigg's laboratory at Kolkata. The whole collection procedure was carried out in presence of KPT official.

### 5.1.5: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

- Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981
- pH value: The pH value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4550 H + B)
- Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985
- Turbidity: The Turbidity value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2130 B)
- Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2540 C)
- Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2540 D).
- Oil & Grease: The Oil &Grease was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5520 B).
- COD: The COD was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5220 B).
- BOD: The BOD was measured in the laboratory according to the method prescribed by the IS 3025 (Part 44) 1966.
- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2520 B).

- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by I.S.
   3025 (Part 24) 1986.

#### 5.1.6 Assessment of Analytical Results against Standards of Dock Basin & River water: (Table 5.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value: It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids
- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

Table 5.1

Analytical Results of Surface Water Sample collected from the above-mentioned locations

Surface Water (River Water)

			Our Ref. N	lo./ Location			
			E(D)/20-21/905	E(D)/20-21/906	E(D)/21-22/ 58	E(D)/21-22/ 59	
Sl. No.	Test Parameters	Unit	Outside NS Dock Basin on River, 30.03.2021	Outside KP Dock Basin on River, 30.03.2021	Outside NS Dock Basin on River, 23.04.2021	Outside KP Dock Basin on River, 23.04.2021	Norms as per IS: 2296-1982 (Class C)
1	Colour	Hazen	10	20	10	10	300 (Max.)
2	pH Value		7.73	7.82	7.88	7.79	6.5 - 8.5
3	Total Dissolved Solids (TDS)	mg/l	340.0	356.0	492.0	318.0	1500 (Max.)
4	Dissolved Oxygen (DO)	mg/l	6.8	6.6	7.5	6.4	4 (Min.)
5	Oil and Grease (O & G)	mg/l	0.1	< 0.1	< 0.1	0.05	0.1 (Max.)
6	BOD for 3 days at 27°C (BOD)	mg/l	< 3	< 3	13.0	2.65	3 (Max.)
7	Sulphate as SO <sub>4</sub>	mg/l	96.0	14.5	44.0	29.8	400 (Max.)
8	Turbidity	mg/l	23.2	27.2	18.1	20.5	
9	Ammoniacal Nitrogen as NH <sub>3</sub> -N	mg/l	< 0.2	< 0.2	< 0.2	0.029	
10	Salinity	PSU	0.3016	0.3128	0.4807	0.2985	
11	Total Suspended Solids (TSS)	mg/l	51.0	58.0	22.0	18.0	
12	Chemical Oxygen Demand (COD)	mg/l	20.0	29.0	40.0	24.0	
13	Total Coliform/100 ml.	MPN	490	790	920	920	5000 (Max.)
14	Faecal Coliform/100 ml.	MPN	330	330	240	350	-

#### 6.0 CHARACTERISATION OF EFFLUENTS

#### 6.1 Waste Water Characterization:

**6.1.1 Objective**: The main purpose of the study was to get an idea about the quality of Effluents within the area of study. All together 4 Effluent samples were collected and were analysed within our present area of study.

Four (04) *Effluent* samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-28 KPD) and from (iv) KPD 1 (11 KPD) respectively.

# 6.1.2 Effluent character of the present study areas were assessed in terms of the following structure:

- (a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count
- (b) Organoleptic and Physical Parameters:
- ii) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids
- (c) General Parameters Concerning Substances undesirable in Excessive Amounts:
- (i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii) COD.

# 6.1.5: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

- Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981
- pH value: The pH value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4550 H + B)
- Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985
- Turbidity: The Turbidity value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2130 B)
- Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2540 C)
- Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2540 D).
- Oil & Grease: The Oil &Grease was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5520 B).
- COD: The COD was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5220 B).

- BOD: The BOD was measured in the laboratory according to the method prescribed by the IS 3025 (Part 44) 1966.
- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2520 B).
- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by I.S.
   3025 (Part 24) 1986.

#### 6.1.6 Assessment of Analytical Results against Standards of Effluent: (Table 6.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value: It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids
- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

Table 6.1

ANALYTICAL RESULTS OF THE EFFLUENTSAMPLES COLLECTED

**Effluent (Dock Basin Water)** 

				Lillacii	•	asın wa					
			E(D)/20 -21/ 907	E(D)/20 -21/ 908	E(D)/20 -21/ 909	E(D)/20 -21/ 910	E(D)/21 -22/60	E(D)/ 21-22/ 61	E(D)/21 -22/ 62	E(D)/21 -22/63	Limit as per Environment al Protection
Sl. No.	Test Parameters	Unit	7-8 N.S. Dock, 30.3.202	N.S. D. Lock Entrance 30.3.202	KPD 2 (26-28 KPD) 30.3.202	KPD 1 (11 KPD) 30.3.202 1	7-8 N.S. Dock, 23.4.202	N.S. D. Lock Entran ce 23.4.20 21	KPD 2 (26-28 KPD) 23.4.202	KPD 1 (11 KPD) 23.4.202 1	Act, MOE & F for Effluent discharged into Inland surface water
1	pH Value	••	8.12	7.97	7.74	8.39	7.84	7.94	8.16	8.08	5.5 - 9.0
2	Turbidity	NTU	5.4	3.7	4.2	3.2	5.0	3.2	3.8	2.9	
3	Total Suspended Solids (TSS)	mg/l	22.0	< 10	18.0	10.0	10.0	16.0	< 10	< 10	100 (Max.)
4	Ammoniacal Nitrogen as NH <sub>3</sub> -N	mg/l	< 0.2	< 0.2	0.26	0.36	< 0.2	< 0.2	0.38	0.45	50 (Max.)
5	Oil and Grease (O & G)	mg/l	< 6.0	< 6.0	< 6.0	< 6.0	< 6.0	< 6.0	< 6.0	< 6.0	10 (Max.)
6	BOD for 3 days at 27°C	mg/l	6.4	8.6	8.4	7.7	< 5	< 5	9.3	7.7	30 (Max.)
7	Chemical Oxygen Demand (COD)	mg/l	24.0	41.0	49.0	29.0	16.0	20.0	28.0	12.0	250 (Max.)
8	Sulphate as SO <sub>4</sub>	mg/l	73.5	44.4	48.8	12.00	38.0	39.3	33.0	30.00	
9	Colour		Colourl ess	Colourl ess	Colourle ss	Colourl ess	Colourl ess	Colou rless	Colourle ss	Colourl ess	
10	Salinity	PSU	0.3637	0.3694	0.2960	0.2793	0.4869	0.46 85	0.3587	0.3406	
11	Total Dissolved Solids (TDS)	mg/l	410.0	422.0	334.0	316.0	510.0	488. 0	374.0	356.0	
12	Dissolved Oxygen (DO)	mg/l	7.1	6.90	7.00	6.5	7.4	7.10	7.50	7.3	
13	Total Coliform/100 ml. (TC)	MPN	260	33	9	5,400	540	1,60 0	280	220	
14	Faecal Coliform/100 ml. (FC)	MPN	110	17	7	2,400	290	540	130	130	1000 (Max.)

# PERIODIC ENVIRONMENTAL MONITORING REPORT

Chapter - 1

1.0 INTRODUCTION: Pollution is emerging as one of the most significant and

challenging environmental problems of our modern Society. The Kolkata Port Trust (KoPT) is

situated on the left bank of the Hooghly River at 22°32′53″N 88°18′05″E about 203 km

(126 mi) upstream from the sea. The pilotage station is at Gasper/ Saugor roads, 145

Kilometres to the south of the KDS (around 58 km from the sea). The system consists of.

Kidderpore Docks (K.P. Docks): 18 Berths, 6 Buoys / Moorings and 3 Dry Docks. Kolkata

Port Trust (officially renamed after the name of BJS founder as Dr. Syama Prasad Mukherjee

Port Trust, is the only riverine major port of India located in the city of Kolkata, India, It is the

oldest operating port in India, and was constructed by the British East India Company.

Major air pollutants generated by port activities include carbon monoxide (CO), volatile

organic compounds (VOCs), nitrogen oxides (NOx), sulfur oxides (SOx), and particulate

matter (PM). Prolonged exposure to these compounds can effect health include respiratory

diseases, cardiovascular disease, lung cancer and premature death.

Noise from port areas comes not only from ferries, ships and trade but also from industrial

and shipyards activities as well as auxiliary services. In this way, noise pollution can produce

negative effects both to the natural eco-system and to the urban population.

Port operations can cause significant damage to water quality-and subsequently to marine

life and ecosystems, as well as human health. These effects may include bacterial and viral

contamination of commercial fish and shellfish, depletion of oxygen in water, and

bioaccumulation of certain toxins in fish.8 Major water quality concerns at ports include

wastewater and leaking of toxic substances from ships, stormwater runoff, and dredging

Waste management is the most important part in the port areas. Waste management relates

to all kinds of wastes, both liquid and solid, likely to be disposed of in the port area. These

wastes include dredged materials, garbage and oily mixtures discharged from ships, wastes

from cargo operations, and all types of discharges from municipal and waterfront industry

activities.

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

Scope of Work: The periodic measurement of Ambient Air quality, Meteorological observation,

Ambient Noise quality, Surface water quality, Drinking water quality and also Effluent quality

studies were carried out for the session June to August. M/s R. V. Briggs & Co. Pvt. Limited, 9,

Bentinck Street, Kolkata – 700001, performed the whole work. Funding and other logistic supports

were provided by KPT, Khidderpore. According to the work order, the scope of work included:

Systematic evaluation of AmbientAir quality took place for 8 hourly basis at four (04) locations

i) KPD, (Near Dry Dock Area - 2)

ii) KPD-2, (Beside Shed No. 22)

iii) NSD, (Administrative Building)

iv) NSD, (BERTH NO - 4)

and for 24 hours duration at one (01) location respectively. The whole work was executed for

determination of Respirable Particulate matter (RPM), Oxides of Sulfur (SO2), Oxides of nitrogen

(NO<sub>x</sub>), Carbone Monoxide(CO) from each sample.

On each day of sampling at each stations samples for all five parameters (PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub> and NO<sub>2</sub>)

were collected as follows:

i) PM<sub>10</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one

vear

ii) PM<sub>2.5</sub> 1 (one) shift of 24 (twenty four) hrs. twice in a week for a every 3 months for a period of one

year

iii) SO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one

year

iv) NO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one

year

v) CO 8 (eight) hrs. each twice in a week for every 3 months for a period of one year

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

**Ambient Noise level monitoring:** It was carried out for 24 hourly basis in every month from the

following four (04) Locations:

i) KPD, (Near Dry Dock Area - 2)

ii) KPD-2, (Beside Shed No. 22)

iii) NSD, (Near BERTH No. 7)

iv) NSD, (Near BERTH No. 3)

. All the study work was carried out for determination of Leq, Lmax, Lmin, Lday, L night, L 10, L50 and

L90, Ldn etc from each locations as per the Principal rules were published in the Gazette of India vide

number, S.O 123 (E), dated 14<sup>th</sup> February, 2000 and subsequently amended vide S.O 1046 (E), dated

22 <sup>nd</sup> November, 2000, S.O 1088 (E), dated 11 <sup>th</sup> October, 2002, S.O, 1569 (E), dated the 19 <sup>th</sup>

September, 2006 and S.O 50 (E) dated 11 th January, 2010.).

Water sample collection:

Drinking Water samples collected from

(i) Head Office Canteen

(ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap.

(iii) Remount Road Quarter, 9 No. Civil Site Office

(iv) Port Land Park Quarter, Civil Site Office

(v) SMP - Kolkata Hospital Canteen # 09

(vi) Container Terminal Office, (NSD)

(vii) NS Dock Office ,(WTP)

(viii) KP Dock Office

Following parameters were determined from the sample: pH, Colour, TURBIDITY,

Chloride, Residual chlorine, Total Dissolved Solid, Coliform Bacteriological count as per

stipulated norms for analysis of Drinking Water Quality of Central Pollution Control Board,

The following parameters were taken into consideration for drinking water analysis:

(a) Microbiological Tests: (i) Total Coliform Organism / 100 ml. of water, (ii) Faecal (E.Coli)

coliform Count

- Dock Basin Water samples collected from
  - (i) 7 8 N.S. Dock
  - (ii) N.S.D. Lock Entrance
  - (iii) KPD 2 (26-28 KPD)
  - (iv) KPD 1 (11 KPD)
- River Water samples collected from
- (i) Outside NS Dock Basin on River
- (ii) Outside KP Dock Basin on River
- Following parameters were determined from the sample: pH, Colour, TURBIDITY, Dissolved Oxygen (D.O), Bio Chemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Oil & Grease, Sulphate, Ammoniacal Nitrogen (NH<sub>4</sub> N), Total Dissolved Solid, Total Suspended Solid, Saliniy, Coliform Bacteriological count as per stipulated norms for analysis of **Dock Basin** & **River** Water Quality of Central Pollution Control Board,
- **1.2.0 Period of Study:** The entire study period was on selected days between May' 2021 to July' 2021.
- **1.3.0 Work load Completed:** The environmental sampling and related studies that were carried out in the field and at the R.V.Briggs laboratory

Chapter - 2

2.0 AMBIENT AIR QUALITY STUDIES

**2.1.0 Objective:** The most important objective of the study was to obtain a valid idea about the prevailing

ambient air quality over the entire project area, during July' 2021.

**2.2.0 Work Elements:** The main objectives of the study are:-

As per the work order, the following work elements were evaluated:

Collection of ambient air samples for 24 hourly period from 4 air sampling stations as per para 1.3.1,

for determination of the concentration of the following pollutants:

i) Respirable Particulate matter (RPM), (ii) Suspended Particulate Matter (SPM), (iii) Sulphur Di Oxide (SO₂),

(iv) Nitrogen Oxide (NOx), (v) Carbone Monoxide respectively.

**2.3.0 Preparation of Sampling Sites:** At each of the air sampling stations, the actual site of placement of

air sampling equipments were prepared according to the guide lines stipulated in IS: 5182 of Bureau of

Indian Standard approved by the Ministry of Environment & Forests (MoEF), Government of India.

2.4.0 Duration of Air Sampling: Air sampling operations were fixed for 24 hours in 3 shifts and were

splits into eight hours duration in each shift for 4 stations. So, 12 samples were collected from these

stations. Therefore, altogether 12 samples were taken into consideration.

2.6.0 Sampling Equipment & Methodology: Air samples collected by using High Volume Air sampler

Machine (Envirotech, APM 460 BL)

**Laboratory Determination:** 

Respirable Particulate Matter:- For every station and for every shift, one Glass micro fibre filter paper with

a dimension of 203 mm × 254 mm was used to collect air samples. At each station, a total time period of 24

hours duration was taken into consideration for collection of samples. Which was splits into 3 shifts each

of 8 hours duration. Thus, for a 24 hours monitoring a total number of 3 filter papers were used. So, for

four (4) stations in total  $3 \times 4 = 12$  samples were collected.

dried filter papers were weighed and then fitted in the high volume air sampler. The filter papers were re-

Before sampling, all these filter papers were dried in an air oven followed by drying in desiccators. The

weighted at the end of the duration of sampling (8 hours or 6 hours). From the weight indicate the weight

of RPM particle collected over a period of 8 hours or 6 hours. From the corresponding data on total volume

of air, which passed through the sampling machine over the same duration of time, the concentration of

RPM was computed in terms of µg/m³ of air. The assessments were made according to their respective

land use categories.

: Suspended Particulate Matter (SPM):

The pre-weighed empty sample bottles, in which SPM particles were collected, were weighed both in the

pre and post monitoring times. The gain in weight indicated the total weight of SPM collected during 8 or 6

hours sampling times. From the corresponding data on total volume of air drawn in by the sampling

machine, the concentration of SPM was computed in  $\mu g/m^3$  of air.

: Sulphur Di Oxide (SO<sub>2</sub>):

SO<sub>2</sub> in the ambient air was absorbed in 0.05 (M) potassium tetrachloromercurate solution at a flow rate 0.5

litre / minute. It was analysed spectrophotometrically after developing the colour for 30 minutes by

adding sulphamic acid, Formaldehyde and P - rosaniline hydrochloride solution as per IS:5182 (Part - II)

2001 (West & Gacke method) and recorded the absorbance at 560 mm. Then the concentration of SO<sub>2</sub>

was measured by standard curve and represented the results as µg/m<sup>3</sup> in respect of air volume.

: Nitrogen Oxides (NOx):

NO<sub>x</sub> was collected by bubbling air through 0.1 (N) sodium hydroxide and sodium arsenite solution at flow

rate 0.4 lit /min. It was analyzed spectrophotometrically after developing the colour for 10 minutes by

adding Hydrogen peroxide, sulphanilamide and NEDA solution as per IS: 5182 (Part - VI) 2006 (Jacobs &

Hochheiser method ) and recorded the absorbance at 540 mm. Then the concentration of  $NO_x$  was

measured by standard curve and represented the result as  $\mu g/m^3$  in respect of air volume.

: Carbone monoxides (CO):

CO was collected in a bladders and estimated by CO Analyzer and Orsat.

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

**Results of laboratory determinations:** 

The salient findings of concentrations of RPM, SPM,CO, SO<sub>2</sub> and NOx (Table 2.1) of this study are as follows:

Ambient Air Quality in the areas under Industrial, Residential, Rural and Other areas:

(a) Residential Areas:

• SMP, KPD (Near Dry Dock Area – 2):-

The concentration of **PM2.5** ranged from 22.0  $\mu g/m^3$  to 53.0  $\mu g/m^3$  with a mean value of 42.0  $\mu g/m^3$ .

The concentration of **PM**10 ranged from 37.0  $\mu g/m^3$  to 98.0  $\mu g/m^3$  with a mean value of 79.0  $\mu g/m^3$  of air. Concentration of **SO**<sub>2</sub> ranged from 4.4  $\mu g/m^3$  to 5.6  $\mu g/m^3$  of air with a mean value of 5.0 $\mu g/m^3$  of air While the concentration of **NO**x ranged from 18.9  $\mu g/m^3$  to 28.0  $\mu g/m^3$  of air with a mean value of 23.9  $\mu g/m^3$  of air and the concentration of **CO** ranged from 1.13  $m g/m^3$  to 1.27  $m g/m^3$  of air with a mean value of 1.19  $m g/m^3$  of air.

<u>Observation</u>: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

SMP, KPD (Beside Shed No. 22):-

The concentration of **PM2.5** ranged from 24.0  $\mu g/m^3$  to 64.0  $\mu g/m^3$  with a mean value of 41.0  $\mu g/m^3$ .

The concentration of **PM**10 ranged from 39.0  $\mu g/m^3$  to 110.0  $\mu g/m^3$  with a mean value of 72.0  $\mu g/m^3$  of air. Concentration of **SO**<sub>2</sub> ranged from 4.5  $\mu g/5.9$   $\mu g/m^3$  of air with a mean value of 4.9  $\mu g/m^3$  of air While the concentration of **NO**x ranged from 19.4  $\mu g/m^3$  to 28.4  $\mu g/m^3$  of air with a mean value of 24.5  $\mu g/m^3$  of air and the concentration of **CO** ranged from 1.15  $m g/m^3$  to 1.27 $m g/m^3$  of air with a mean value of 1.21  $m g/m^3$  of air.

<u>Observation</u>: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

## • SMP, NSD (Administrative Building):-

The concentration of **PM2.5** ranged from 23.0  $\mu g/m^3$  to 58.0  $\mu g/m^3$  with a mean value of 39.0  $\mu g/m^3$ .

The concentration of **PM**10 ranged from 35.0  $\mu$ g/m³ to 102.0  $\mu$ g/m³ with a mean value of 74.0  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 4.3  $\mu$ g/m³ to 5.9  $\mu$ g/m³ of air with a mean value of 5.0 $\mu$ g/m³ of air While the concentration of **NO**<sub>3</sub> ranged from 19.6  $\mu$ g/m³ to 27.9 $\mu$ g/m³ of air with a mean value of 23.2  $\mu$ g/m³ of air and the concentration of **CO** ranged 1.13 mg/m³ to 1.25 mg/m³ of air with a mean value of 1.18 mg/m³ of air.

<u>Observation</u>: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

# • SMP, NSD (BERTH No.- 4)

The concentration of **PM2.5** ranged from 16.0  $\mu g/m^3$  to 51.0.0  $\mu g/m^3$  with a mean value of 37.0  $\mu g/m^3$ .

The concentration of **PM10** ranged from 33.0  $\mu g/m^3$  to 99.0  $\mu g/m^3$  with a mean value of 66.0  $\mu g/m^3$  of air. Concentration of **SO**<sub>2</sub> ranged from 4.2  $\mu g/m^3$  5.4  $\mu g/m^3$  of air with a mean value of 4.9  $\mu g/m^3$  of air While the concentration of **NO**x ranged from 18.2  $\mu g/m^3$  to 26.8  $\mu g/m^3$  of air with a mean value of 22.8  $\mu g/m^3$  of air and the concentration of **CO** ranged from 1.10 mg/m<sup>3</sup> to 1.25 mg/m<sup>3</sup> of air with a mean value of 1.19 mg/m<sup>3</sup> of air.

<u>Observation</u>: All the parameters are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009 except concentration CO due to continuous movement of vehicles, loading of container and other activities.

#### AMBIENT AIR QUALITY STYDY HAD BEEN DEPICTED THROUGH PHOTOGRAPHS



Table - 2.1

LAND USE CATEGORY – WISEDISTRIBUTION OF AIR SAMPLING STATIONS AND ITS ANALYTICAL RESULTS


(06.07.2021 TO 29.07.2021)

Location : SMP, KPD (Near Dry Dock Area-2)

Period : 06.07.2021 TO 29.07.2021

Date of Inspection						U	nit in μg/n	<b>1</b> <sup>3</sup>							Unit in	mg/m³	
	Pm2.5		Pn	n10			So	2			No	02			C	Co	
	Daily Avg.	Shift- 1	Shift- 2	Shift-3	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.
06.07.2021	40	121	84	64	91	4.2	6.2	4.7	5.0	25.5	26.2	24.1	25.3	1.02	1.23	1.20	1.15
09.07.2021	52	123	94	78	98	4.3	5.3	4.5	4.7	23.5	24.2	20.5	22.7	1.02	1.20	1.17	1.13
12.07.2021	53	88	102	86	92	5.1	5.3	4.5	5.0	24.2	27.3	23.5	25.0	1.02	1.24	1.18	1.15
15.07.2021	48	94	104	84	94	4.8	6.6	5.3	5.6	28.0	30.3	25.8	28.0	1.29	1.31	1.22	1.27
20.07.2021	53	81	95	96	91	5.3	6.1	5.1	5.5	25.8	27.3	22.7	25.3	1.28	1.24	1.21	1.24
23.07.2021	22	49	37	25	37	4.6	4.6	4.0	4.4	18.9	20.5	17.4	18.9	1.18	1.17	1.14	1.16
26.07.2021	38	95	72	60	76	4.6	5.1	4.3	4.7	25.0	22.7	20.5	22.7	1.28	1.22	1.21	1.24
29.07.2021	28	36	71	43	50	5.1	5.6	4.0	4.9	23.5	25.0	21.2	23.2	1.22	1.24	1.17	1.21
Norms NAAQM	60				100				80				80				4.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD (Near Dry Dock Area-2) (May' 21 to July' 21)

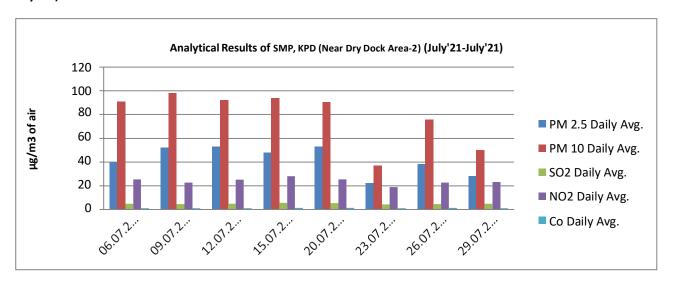


Location: SMP, KPD-2 (Beside Shed No. 22)

Period : 06.07.2021 TO 29.07.2021

Date of Inspection							Unit in µg	g/m³							Unit in	mg/m <sup>3</sup>	
_	PM2.		PM	110			S	02			N	102			C	0	
	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.	Shift- 1	Shift- 2	Shift-3	Dail y Avg.	Shift- 1	Shift- 2	Shift-3	Daily Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.
06.07.2021	33	100	85	58	81	5.2	4.5	4.0	4.6	27.1	26.3	24.8	26.1	1.26	1.21	1.16	1.21
09.07.2021	45	73	53	85	70	4.8	5.4	4.6	4.9	26.0	26.7	22.9	25.2	1.25	1.22	1.19	1.22
12.07.2021	44	84	88	48	73	5.3	4.3	4.6	4.7	26.9	29.2	27.7	27.9	1.22	1.19	1.13	1.18
15.07.2021	64	134	94	103	110	5.3	6.4	6.1	5.9	28.4	29.9	26.9	28.4	1.30	1.27	1.23	1.27
20.07.2021	58	97	129	70	99	4.8	5.6	5.3	5.2	22.4	26.9	25.4	24.9	1.28	1.26	1.21	1.25
23.07.2021	24	55	38	27	40	4.8	4.6	4.3	4.6	20.2	19.4	18.7	19.4	1.21	1.14	1.11	1.15
26.07.2021	32	79	69	35	61	4.1	4.3	5.1	4.5	20.2	23.2	20.9	21.4	1.26	1.22	1.19	1.22
29.07.2021	26	38	45	33	39	5.3	4.6	4.1	4.7	23.2	23.9	20.9	22.7	1.25	1.21	1.17	1.21
Norms NAAQM	60				100				60				60				5.0

# HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD-2 (Beside Shed No. 22) (March'21 to April'21)

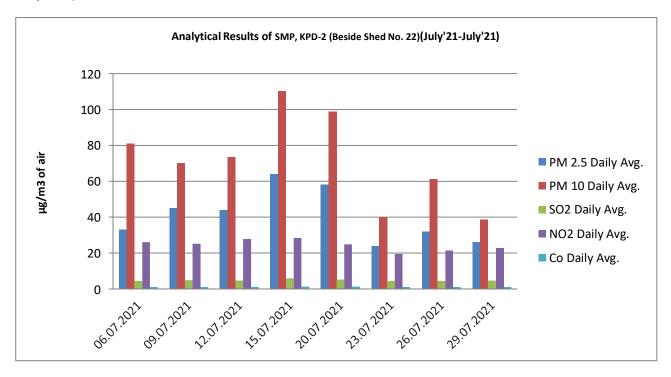

Location : SMP, NSD (Administrative Building)

Period : 06.07.2021 TO 29.07.2021

Date of Inspection						Un	it in μg	/m <sup>3</sup>							Unit in	mg/m <sup>3</sup>	
•	PM2.5		PM	<b>I</b> 10			S	SO2			NO	)2			C	0	
	Daily Avg.	Shift-1	Shift -2	Shift -3	Daily Avg.	Shi ft-1	Shi ft-2	Shi ft-3	Daily Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.
06.07.2021	36	108	90	64	87	5.2	4.7	5.4	5.1	23.4	25.7	21.9	23.7	1.27	1.22	1.19	1.22
09.07.2021	50	99	106	72	92	5.3	5.6	4.6	5.2	22.0	23.5	20.5	22.0	1.15	1.18	1.14	1.16
12.07.2021	49	98	81	71	83	5.6	5.3	5.1	5.3	22.9	25.2	22.2	23.4	1.28	1.23	1.13	1.21
15.07.2021	36	87	77	61	75	5.1	5.6	4.1	4.9	26.0	27.5	22.9	25.5	1.23	1.20	1.01	1.15
20.07.2021	58	125	94	86	102	6.1	6.4	5.1	5.9	28.1	29.7	25.9	27.9	1.29	1.27	1.19	1.25
23.07.2021	27	60	43	31	45	4.1	4.6	4.3	4.3	19.4	22.3	17.1	19.6	1.16	1.13	1.11	1.13


Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

26.07.2021	36	98	77	43	73	4.8	5.3	4.1	4.7	21.6	23.8	18.6	21.3	1.20	1.22	1.17	1.20
29.07.2021	23	28	40	38	35	4.1	4.6	4.3	4.3	20.1	22.3	23.1	21.8	1.18	1.15	1.13	1.15
Norms NAAQM	60				100				60				60				5.0

HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (Administrative Building) (March'21 to April'21)

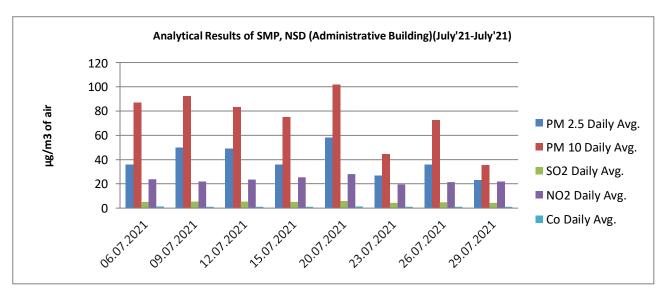

Location : SMP, NSD (BERTH NO - 4)

Period : 06.07.2021 TO 29.07.2021

Date of Inspection							Unit in µ	g/m³							Unit in	mg/m <sup>3</sup>	
	PM2.5		PM	110			SO	02			NO	02			C	0	
	Daily Avg.	Shift -1	Shift -2	Shift -3	Daily Avg.	Shift -1	Shift -2	Shift -3	Dail y Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.
06.07.2021	49	126	90	80	99	5.4	5.6	4.7	5.2	26.2	23.9	21.6	23.9	1.25	1.28	1.22	1.25
09.07.2021	48	83	77	66	75	5.1	5.3	4.1	4.8	25.2	26.0	22.9	24.7	1.2	1.19	1.15	1.18
12.07.2021	51	118	81	66	88	4.6	5.6	4.8	5.0	27.5	29.0	23.8	26.8	1.23	1.26	1.18	1.22
15.07.2021	32	60	88	62	70	4.6	5.3	4.3	4.7	24.6	26.1	20.8	23.8	1.19	1.21	1.14	1.18
20.07.2021	48	76	97	66	80	4.8	5.9	5.6	5.4	23.8	25.3	20.8	23.3	1.23	1.21	1.17	1.20

23.07.2021	20	46	34	23	34	5.9	4.1	4.3	4.8	20.5	17.4	16.7	18.2	1.15	1.11	1.03	1.10
26.07.2021	29	45	70	31	49	4.3	4.6	3.8	4.2	21.2	19.7	18.9	19.9	1.18	1.24	1.11	1.18
29.07.2021	16	33	40	26	33	5.3	5.1	4.6	5.0	19.7	23.5	22.0	21.7	1.17	1.19	1.15	1.17
Norms NAAQM	60				100				60				60				5.0

HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (BERTH NO - 4) (March'21 to April'21)

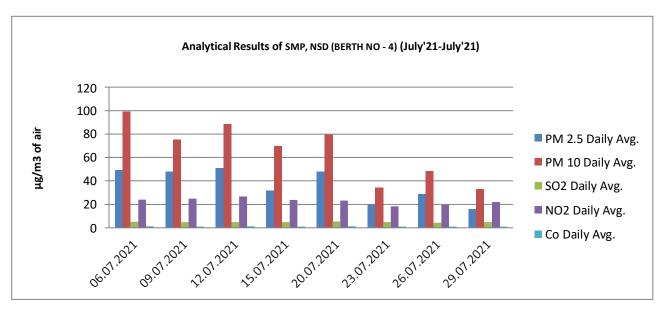


Table - 2.2

#### [SCHEDULE VII] [See rule 3 (3B)]

#### **National Ambient Air Quality Standards**

Pollutants	Time Weighted Average	Concentration in Ambi	ent Air (μg / m³ of air)
	J	Industrial, Residential, Rural & Other Areas	Ecologically Sensitive Areas
Sulphur Dioxide (SO <sub>2</sub> )	Annual Average *	50	20
	24 hours**	80	80
Nitrogen Dioxide (NO <sub>2</sub> )	Annual Average *	40	30
	24 hours**	80	80
Carbon monoxide	8 hours**	2	2
(CO)	1 hours**	4	4
Particulate Matter (PM10) (size less than 10μm) or PM <sub>10</sub>	Annual Average *	60	60
	24 hours**	100	100
Particulate Matter (PM2.5) (size less than 2.5µm	Annual Average *	40	40
, , , , , , ,	24 hours**	60	60

<sup>\*</sup> Annual Arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform interval

[Norms as per Ministry of Environment and Forests Notification, New Delhi, the 16<sup>th</sup> November, 2009]

[Environment (Protection) Seventh Amendment Rules, 2009]

#### Chapter - 3

## 3.0 AMBIENT NOISE QUALITY STUDY

**3.1.0Objective:** Anevaluation of ambient noise levels were carried out in and around the working areasduring September -December2017, according to the following land use (Table 3.3) categories:

<sup>\*\* 24</sup> hourly / 8 hourly values should be met 98 % of the time in a year. However, 2 % of the time, it may exceed but not on two consecutive days.

- Ambient Noise level in the Residential areas.
- Ambient Noise levels in the Commercial areas
- Ambient Noise Level in the Industrial areas

#### 3.2.0 Selection of Noise level Monitoring Stations:

The noise level measurement stations selected according to each land use category, the locationdetails of which have been depicted in Table 3.0.

#### Sampling equipment and methodology:

#### :Equipment:

Noise level measurements were carried out with the help of portable Sound level Meter (SL-4001 and SL 4033SD) respectively. M / S Lutron manufactured both the instruments.

#### : Methodology:

- (a) For determination of ambient noise at a particular point, the noise meter probe was pointed to the four cardinal directions of north, south, east and west. Corresponding to each direction a set of reading in "slow" setting was recorded.
- (b) During the study time a gap of 30 seconds was allowed between two consecutive data observation. Sound level was collected to monitor the values of L 10, L 50, L 90, Lmax, Lmin& L day and L night during the period of 24 hrs.monitoring period.
- (c) The noise levels were recorded continuously at 1 hourly interval through SL 4001. Thus in total 1440 readings were recorded after 12 hours study. While through SL 4033 SD, the ambient noise levels were measured for 24 hours continuously. So, here a total number of 2880 readings were recorded after 24 hours study.

The measurements recorded are detailed below:

#### (c) Equivalent Continuous Sound Pressure Level (Leq):

Equivalent Continuous Sound Pressure Level, or Leq, is the constant noise level that would result in the same total sound energy being produced over a given period. It can be measured in either A, C or Z (Linear) modes. Leq is not an 'average sound level', as it sometimes referred to. The equations used to calculate Leq are not calculating a specific average level.

Leq can be described mathematically by the following equation:  $L_{eq} = 10log_{10} \left( \frac{1}{T_M} \int_{Q}^{T_M} \left( \frac{P(t)}{P_0} \right)^2 dt \right)$ 

Where:

- Leq is the equivalent continuous linear weighted sound pressure level re 20μPa, determined over a measured time interval Tm (secs)
- P(t) is the instantaneous sound pressure of the sound signal
- P0 is the reference sound pressure of 20μPa

When the instantaneous A-weighted sound pressure (PA) of the sound signal is introduced the equivalent continuous A-weighted sound pressure level determined over time interval Tm is as follows:

$$L_{eq} = 10log_{10} \frac{1}{T_{M}} \int_{0}^{M} \left( \frac{P_{A}(t)}{P_{0}} \right)^{2} dt$$

In practice when measuring noise it is possible to take Leq readings, with your instrument, of short duration, i.e <5 minutes, providing all variations of noise emissions are covered. If the measured environment changes greatly then the longer the Leq measurement is taken the more accurate the measurement.

Adding Leq values requires taking an anti-log of each value. The addition can be performed as shown:

A weighting: the A-weighting

Total L<sub>eq</sub> = 
$$10log \left( \frac{10^{\frac{L_{eq}^1}{10}} + 10^{\frac{L_{eq}^2}{10}} + 10^{\frac{L_{eq}^3}{10}} + \dots + 10^{\frac{L_{eq}^n}{10}}}{n} \right)$$

filter covers the full audio range - 20 Hz to 20 kHz and the shape is similar to the response of the human ear at the lower levels.

A-weighted noise measurements are the most widely used and confirm the accuracy of the meter including the filters.

The preferred convention is to write LA = x dB, however dB A and dB (A) are often used, etc.,

C-weighting: a standard frequency weighting for sound level meters, commonly used for higher level measurements, it also written as dB(C) or dBC.

The A-weighting curve is used extensively for general purpose noise measurements but the C-weighting correlates better with the human response to high noise levels.

L50: If we consider any fluctuating noise levels and store the results once a second, then at the end of an hour we would have 3600 samples. We can then use these samples to determine some helpful statistics. For example if add up all the samples and divide by 3600 then we will get the average or L50% value of the noise over the hour.

L10: By definition the L10 value is the level just exceeded for 10% of the time and takes account of any annoying peaks of noise.

L90: By definition the L90 value is the level just exceeded for 90% of the time and takes account of any annoying peaks of noise.

L max is the highest RMS (root mean squared) sound pressure level within the measuring period.

L min is the lowest RMS sound pressure level within the measuring period.

L day is the total results during day time monitoring

L night is the total results during night time.

# Table: 3.1

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 07-08.05.2021

		D	ay Time	( 06:00 A	.M. to 10:	00 P.M.)			
Sl. No.	Date of Monitoring	Time		1	Noise Lev	el in dB(A	<b>A)</b>		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide
			$\mathbf{L}_{10}$	L <sub>50</sub>	L <sub>90</sub>	$L_{ m Min}$	L <sub>Max</sub>	Leq	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	68.0	72.2	78.4	66.3	85.3	75.7	75 dB(A)
2.		01:01 P.M 02:00 P.M.	67.0	70.9	75.7	65.6	83.4	73.3	
3.		02:01 P.M 03:00 P.M.	67.1	70.2	75.0	64.8	80.8	72.2	
4.		03:01 P.M 04:00 P.M.	67.9	70.9	75.1	63.5	76.0	71.8	
5.		04:01 P.M 05:00 P.M.	66.2	70.0	74.3	63.8	80.7	71.5	
6.		05:01 P.M 06:00 P.M.	60.7	63.3	70.1	59.1	95.9	78.7	
7.	07.05.2021	06:01 P.M 07:00 P.M.	62.9	64.3	69.2	62.1	80.6	67.4	
8.		07:01 P.M 08:00 P.M.	63.1	64.7	66.6	62.6	73.0	65.5	
9.		08:01 P.M 09:00 P.M.	62.2	64.5	66.1	61.3	66.8	64.4	
10.		09:01 P.M 10:00 P.M.	63.2	64.6	65.9	61.7	70.7	64.8	
11.		06:01 A.M 07:00 A.M.	62.8	64.7	67.1	62.0	71.8	65.4	
12.		07:01 A.M08:00 A.M.	64.7	66.0	70.7	64.3	74.5	67.7	
13.		08:01 A.M 09:00 A.M.	66.4	74.5	82.2	65.1	86.3	77.6	
14.		09:01 A.M 10:00 A.M.	67.5	71.6	76.8	66.1	85.3	74.7	
15.	08.05.2021	10:01 A.M 11:00 A.M.	66.8	71.0	75.7	65.2	79.3	72.6	
16.		11:01 A.M 12:00 P.M.	67.6	70.5	75.9	64.8	80.8	72.6	
		L(Day)	65.2	68.3	72.8	63.6	79.5	71.0	
		Ni	ight Time	e ( 10:00 F	P.M. to 06	:00 A.M.	)		
17.	07.05.2021	10:01 P.M 11:00 P.M.	59.9	61.2	63.0	59.0	68.7	61.8	70 dB(A)
18.	07.03.2021	11:01 P.M 00:00 A.M.	59.7	60.7	61.7	59.4	62.7	60.7	
19.		00:01 A.M 01:00 A.M.	60.1	60.8	61.9	59.4	65.8	61.1	
20.	]	01:01 A.M 02:00 A.M.	59.9	60.7	61.8	59.2	62.0	60.8	
21.	08.05.2021	02:01 A.M 03:00 A.M.	60.0	61.1	62.1	59.4	63.8	61.2	
22.	00.03.2021	03:01 A.M 04:00 A.M.	60.5	61.4	63.2	59.6	69.6	62.1	
23.		04:01 A.M 05:00 A.M.	60.8	62.2	63.6	59.2	65.4	62.4	
24.		05:01 A.M 06:00 A.M.	61.0	62.5	63.9	59.9	69.1	62.8	
		L(Night):	60.2	61.3	62.7	59.4	65.9	61.6	

AMBIENT NOISE LEVEL OF SMP, KPD (NEAR DRY DOCK AREA-2) PRESENTED THROUGH HISTOGRAM

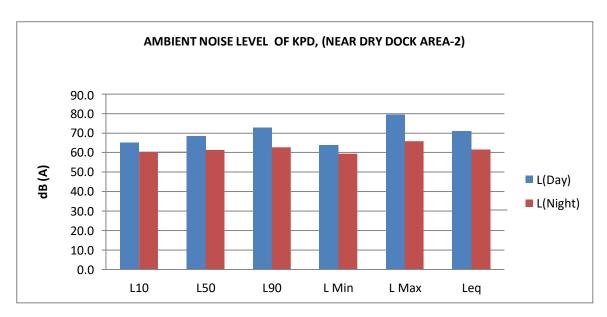


Table - 3.2

RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22) Date of Monitoring: 07-05.05.2021

			Day Tim	e ( 06:00 A.I	M. to 10:00 I	P.M.)			
Sl. No.	Date of Monitoring	Time			Noise Level	in dB(A)			Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd.
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	$L_{Min}$	L <sub>Max</sub>	$L_{eq}$	11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	67.0	71.6	79.1	52.9	80.6	75.0	75 dB(A)
2.		01:01 P.M 02:00 P.M.	70.8	71.7	72.7	69.0	73.2	71.8	
3.	-	02:01 P.M 03:00 P.M.	72.4	72.8	73.1	72.3	73.5	72.8	
4.	=	03:01 P.M 04:00 P.M.	47.8	71.7	72.6	46.1	73.2	70.3	
5.	<del>-</del>	04:01 P.M 05:00 P.M.	71.8	72.7	73.9	71.3	74.3	72.9	
6.	-	05:01 P.M 06:00 P.M.	55.5	73.7	77.7	49.1	78.2	74.5	
7.	07.05.2021	06:01 P.M 07:00 P.M.	77.0	77.4	79.7	76.7	80.6	77.8	
8.	1	07:01 P.M 08:00 P.M.	79.9	80.4	80.7	79.7	81.3	80.3	
9.	1	08:01 P.M 09:00 P.M.	79.1	79.4	80.3	78.8	80.7	79.6	
10.	-	09:01 P.M 10:00 P.M.	45.5	48.6	79.6	44.7	80.0	74.8	
11.	=	06:01 A.M 07:00 A.M.	52.8	59.8	70.0	51.3	85.5	69.6	
12.	1	07:01 A.M 08:00 A.M.	56.8	59.8	64.0	52.9	73.5	63.0	
13.	1	08:01 A.M 09:00 A.M.	56.7	60.1	71.7	53.8	73.9	66.3	
14.	08.05.2021	09:01 A.M 10:00 A.M.	55.9	60.4	67.2	54.5	75.5	64.5	

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

15.		10:01 A.M 11:00 A.M.	55.1	60.2	67.6	50.9	70.1	63.1	
16.		11:01 A.M 12:00 P.M.	58.6	64.1	73.7	57.1	82.8	71.2	
		L(Day)	62.7	67.8	74.0	60.1	77.3	71.7	
			Night Tin	ne ( 10:00 P.I	M. to 06:00	A.M.)	•	•	
17.	07.05.2021	10:01 P.M 11:00 P.M.	39.8	45.8	71.0	38.5	71.5	67.1	70 dB(A)
18.	07.03.2021	11:01 P.M 00:00 A.M.	69.7	69.9	70.3	69.5	70.4	69.9	
19.		00:01 A.M 01:00 A.M.	69.6	69.7	69.9	69.5	70.0	69.7	
20.		01:01 A.M 02:00 A.M.	69.9	70.2	72.6	69.7	73.0	71.2	
21.	08.05.2021	02:01 A.M 03:00 A.M.	72.8	73.1	73.3	72.3	73.4	73.1	
22.	08.03.2021	03:01 A.M 04:00 A.M.	72.5	72.8	73.1	72.4	73.3	72.8	
23.		04:01 A.M 05:00 A.M.	40.8	72.6	72.9	38.2	73.2	70.8	
24.		05:01 A.M 06:00 A.M.	39.9	42.9	46.6	38.2	50.9	44.1	
		L(Night):	59.4	64.6	68.7	58.5	69.5	67.4	

AMBIENT NOISE LEVEL OF SMP, KPD-2 (BESIDE SHED NO. 22) PRESENTED THROUGH HISTOGRAM

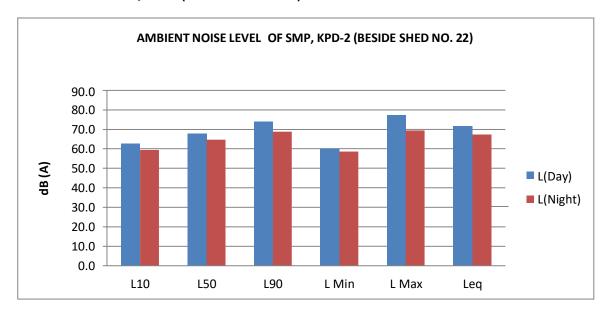


Table: 3.3

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, NSD (Near BERTH No.7)

Date of Monitoring: 07-08.05.2021

	Day Time ( 06:00 A.M. to 10:00 P.M. )													
Sl. No.	Date of Monitoring	Time		1	Noise Leve	el in dB(A	)		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection)					
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	$\mathbf{L}_{\mathbf{Min}}$	$\mathbf{L}_{\mathrm{eq}}$	Act, 1986)' for Industrial area						
1.		12:01 P.M 01:00 P.M.	62.3	66.0	73.5	47.3	75.0	69.4	75 dB(A)					
2.	07.05.2021	01:01 P.M 02:00 P.M.	66.3											
3.		02:01 P.M 03:00 P.M.	66.8	67.2	67.5	66.7	67.9	67.2						

4.		03:01 P.M 04:00 P.M.	42.2	66.1	66.8	40.5	67.6	64.7	
5.		04:01 P.M 05:00 P.M.	66.2	67.2	68.3	65.9	68.7	67.3	l
6.		05:01 P.M 06:00 P.M.	49.9	68.1	72.2	43.5	72.6	69.0	l
7.		06:01 P.M 07:00 P.M.	71.4	71.8	74.4	71.1	75.0	72.2	I
8.		07:01 P.M 08:00 P.M.	74.3	74.8	75.1	74.1	75.7	74.7	
9.		08:01 P.M 09:00 P.M.	73.5	73.8	74.7	73.2	75.1	74.0	I
10.		09:01 P.M 10:00 P.M.	39.9	43.0	74.0	39.1	74.4	68.9	I
11.		06:01 A.M 07:00 A.M.	57.8	60.2	66.1	57.4	76.0	63.8	I
12.	]	07:01 A.M 08:00 A.M.	59.4	61.9	65.5	58.0	74.0	64.0	
13.	1	08:01 A.M 09:00 A.M.	56.9	60.3	67.9	54.6	75.4	64.9	
14.		09:01 A.M 10:00 A.M.	61.4	67.1	71.8	59.2	78.8	69.1	
15.	08.05.2021	10:01 A.M 11:00 A.M.	57.2	64.8	72.1	54.0	81.2	69.2	
16.		11:01 A.M 12:00 P.M.	54.9	62.9	71.2	53.3	80.3	68.6	
		L(Day)	59.9	65.1	70.5	57.6	74.1	68.3	
		Nig	ht Time	(10:00 P.)	M. to 06:0	0 A.M.)			
17.	07.05.2021	10:01 P.M 11:00 P.M.	57.5	59.8	62.9	47.1	69.9	61.0	70 dB(A)
18.	07.03.2021	11:01 P.M 00:00 A.M.	58.9	61.5	69.3	57.7	83.7	68.8	I
19.		00:01 A.M 01:00 A.M.	59.0	60.3	63.4	57.5	67.7	61.5	
20.	1	01:01 A.M 02:00 A.M.	58.8	61.6	66.8	57.3	76.2	65.1	
21.	09.05.2021	02:01 A.M 03:00 A.M.	57.0	64.1	70.5	54.8	74.2	66.6	
22.	08.05.2021	03:01 A.M 04:00 A.M.	57.6	60.7	69.3	56.0	75.7	65.6	
23.	]	04:01 A.M 05:00 A.M.	56.6	59.0	64.9	56.2	74.8	62.5	
24.	]	05:01 A.M 06:00 A.M.	58.2	60.8	64.3	56.8	72.8	62.9	
		L(Night):	57.9	61.0	66.4	55.4	74.4	64.3	1

AMBIENT NOISE LEVEL OF SMP, NSD (NEAR BERTH NO. 7) PRESENTED THROUGH HISTOGRAM

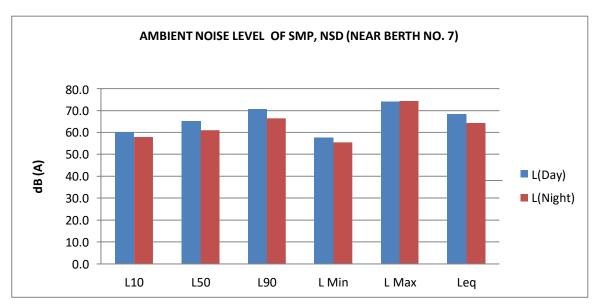


Table - 3.4
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near BERTH No. 3) Date of Monitoring: 07-08.05.2021

	Day Time ( 06:00 A.M. to 10:00 P.M. )											
Sl.	Date of	Time		1	Noise Leve	el in dB(A	)		Norms as per 'The Noise Pollution			
No.	Monitoring		$\mathbf{L}_{10}$	L <sub>50</sub>	L <sub>90</sub>	$\mathbf{L}_{ ext{Min}}$	$\mathbf{L}_{ ext{Max}}$	$\mathbf{L}_{\mathrm{eq}}$	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986) for Industrial area			
1.	07.05.2021	12:01 P.M 01:00 P.M.	63.3	67.5	73.7	61.6	80.6	71.0	75 dB(A)			
2.	07.03.2021	01:01 P.M 02:00 P.M.	62.3	66.2	71.0	60.9	78.7	68.6				

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

_		00.04.01.0.00.01.0			=0.0				
3.		02:01 P.M 03:00 P.M.	62.4	65.5	70.3	60.1	76.1	67.5	
4.		03:01 P.M 04:00 P.M.	63.2	66.2	70.4	58.8	71.3	67.1	
5.		04:01 P.M 05:00 P.M.	61.5	65.3	69.6	59.1	76.0	66.8	
6.		05:01 P.M 06:00 P.M.	56.0	58.6	65.4	54.4	91.2	74.0	
7.		06:01 P.M 07:00 P.M.	58.2	59.6	64.5	57.4	75.9	62.7	
8.		07:01 P.M 08:00 P.M.	58.4	60.0	61.9	57.9	68.3	60.8	
9.		08:01 P.M 09:00 P.M.	57.5	59.8	61.4	56.6	62.1	59.7	
10.		09:01 P.M 10:00 P.M.	58.2	59.8	61.2	57.0	64.8	60.0	
11.		06:01 A.M 07:00 A.M.	58.1	60.0	62.4	57.3	67.1	60.7	
12.		07:01 A.M 08:00 A.M.	60.0	61.3	66.0	59.6	69.8	63.0	
13.		08:01 A.M 09:00 A.M.	61.1	68.1	73.9	60.1	79.8	70.6	
14.		09:01 A.M 10:00 A.M.	56.7	66.2	72.8	52.8	84.2	71.3	
15.	08.05.2021	10:01 A.M 11:00 A.M.	51.3	55.3	68.7	50.4	77.2	65.1	
16.		11:01 A.M 12:00 P.M.	51.0	56.2	73.4	50.0	83.3	70.6	
		L(Day)	58.7	62.2	67.9	57.1	75.4	66.2	
		Ni	ght Time	( 10:00 P	.M. to 06:	00 A.M.)			
17.	07.05.2021	10:01 P.M 11:00 P.M.	58.9	60.2	62.0	58.0	67.7	60.8	70 dB(A)
18.	07.03.2021	11:01 P.M 00:00 A.M.	58.7	59.7	60.7	58.4	61.7	59.7	
19.		00:01 A.M 01:00 A.M.	59.1	59.8	60.9	58.4	64.8	60.1	
20.		01:01 A.M 02:00 A.M.	58.9	59.7	60.8	58.2	61.0	59.8	
21.	08.05.2021	02:01 A.M 03:00 A.M.	59.0	60.1	61.1	58.4	62.8	60.2	
22.	08.03.2021	03:01 A.M 04:00 A.M.	59.5	60.4	62.2	58.6	68.6	61.1	
23.		04:01 A.M 05:00 A.M.	59.8	61.2	62.6	58.2	64.4	61.4	
24.		05:01 A.M 06:00 A.M.	60.0	61.5	62.9	58.9	68.1	61.8	
		L(Night):	59.2	60.3	61.7	58.4	64.9	60.6	

AMBIENT NOISE LEVEL OF SMP, NSD (Near BERTH No. 3) PRESENTED THROUGH HISTOGRAM

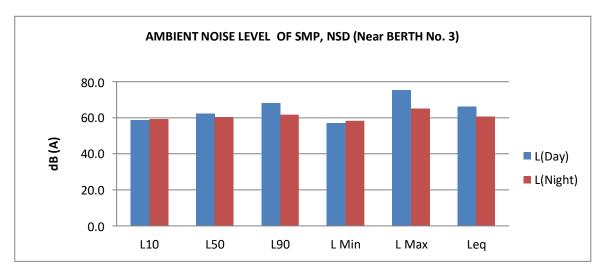


Table: 3.5

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 10-11.06.2021

Day Time (06:00 A.M. to 10:00 P.M.)

Sl. No.	Date of Monitoring	Time		N	Noise Leve		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide		
			$L_{10}$	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	71.6	75.8	82.0	69.9	88.9	79.3	75 dB(A)
2.		01:01 P.M 02:00 P.M.	70.6	74.5	79.3	69.2	87.0	76.9	
3.		02:01 P.M 03:00 P.M.	70.7	73.8	78.6	68.4	84.4	75.8	
4.		03:01 P.M 04:00 P.M.	71.5	74.5	78.7	67.1	79.6	75.4	
5.		04:01 P.M 05:00 P.M.	69.8	73.6	77.9	67.4	84.3	75.1	
6.		05:01 P.M 06:00 P.M.	64.3	66.9	73.7	62.7	99.5	82.3	
7.	10.06.2021	06:01 P.M 07:00 P.M.	66.5	67.9	72.8	65.7	84.2	71.0	
8.		07:01 P.M 08:00 P.M.	66.7	68.3	70.2	66.2	76.6	69.1	
9.		08:01 P.M 09:00 P.M.	65.8	68.1	69.7	64.9	70.4	68.0	
10.		09:01 P.M 10:00 P.M.	66.8	68.2	69.5	65.3	74.3	68.4	
11.		06:01 A.M 07:00 A.M.	66.4	68.3	70.7	65.6	75.4	69.0	
12.		07:01 A.M 08:00 A.M.	68.3	69.6	74.3	67.9	78.1	71.3	
13.		08:01 A.M 09:00 A.M.	70.0	78.1	85.8	68.7	89.9	81.2	
14.		09:01 A.M 10:00 A.M.	71.1	75.2	80.4	69.7	88.9	78.3	
15.	11.06.2021	10:01 A.M 11:00 A.M.	70.4	74.6	79.3	68.8	82.9	76.2	
16.		11:01 A.M 12:00 P.M.	71.2	74.1	79.5	68.4	84.4	76.2	
		L(Day)	68.8	71.9	76.4	67.2	83.1	74.6	
				_ `	P.M. to 06				
17.	10.06.2021	10:01 P.M 11:00 P.M.	63.5	64.8	66.6	62.6	72.3	65.4	70 dB(A)
18.	10.00.2021	11:01 P.M 00:00 A.M.	63.3	64.3	65.3	63.0	66.3	64.3	
19.		00:01 A.M 01:00 A.M.	63.7	64.4	65.5	63.0	69.4	64.7	
20.		01:01 A.M 02:00 A.M.	63.5	64.3	65.4	62.8	65.6	64.4	
21.	11.06.2021	02:01 A.M03:00 A.M.	63.6	64.7	65.7	63.0	67.4	64.8	
22.	11.00.2021	03:01 A.M 04:00 A.M.	64.1	65.0	66.8	63.2	73.2	65.7	
23.		04:01 A.M05:00 A.M.	64.4	65.8	67.2	62.8	69.0	66.0	
24.		05:01 A.M 06:00 A.M.	64.6	66.1	67.5	63.5	72.7	66.4	
		L(Night):	63.8	64.9	66.3	63.0	69.5	65.2	

AMBIENT NOISE LEVEL OF SMP, KPD (Near Dry Dock Area-2) PRESENTED THROUGH HISTOGRAM


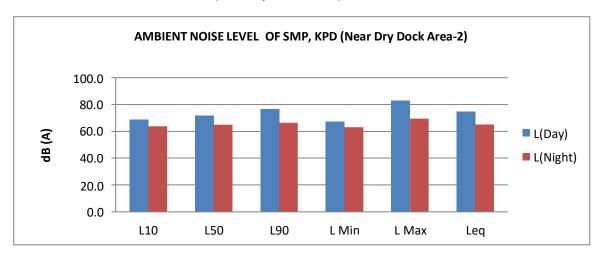


Table - 3.6
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22) Date of Monitoring: 10-11.06.2021

			Day Tim	e ( 06:00 A.N	M. to 10:00 l	P.M.)			
Sl. No.	Date of Monitoring	Time			Noise Level	l in dB(A)			Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the
			L <sub>10</sub>	L <sub>50</sub>	L90	L <sub>Min</sub>	L <sub>Max</sub>	Leq	Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	70.2	74.8	82.3	56.1	83.8	78.2	75 dB(A)
2.		01:01 P.M 02:00 P.M.	74.0	74.9	75.9	72.2	76.4	75.0	
3.		02:01 P.M 03:00 P.M.	75.6	76.0	76.3	75.5	76.7	76.0	
4.		03:01 P.M 04:00 P.M.	51.0	74.9	75.8	49.3	76.4	73.5	
5.		04:01 P.M 05:00 P.M.	75.0	75.9	77.1	74.5	77.5	76.1	
6.		05:01 P.M 06:00 P.M.	58.7	76.9	80.9	52.3	81.4	77.7	
7.	10.06.2021	06:01 P.M 07:00 P.M.	80.2	80.6	82.9	79.9	83.8	81.0	
8.		07:01 P.M 08:00 P.M.	83.1	83.6	83.9	82.9	84.5	83.5	
9.		08:01 P.M 09:00 P.M.	82.3	82.6	83.5	82.0	83.9	82.8	
10.		09:01 P.M 10:00 P.M.	48.7	51.8	82.8	47.9	83.2	78.0	
11.		06:01 A.M 07:00 A.M.	56.0	63.0	73.2	54.5	88.7	72.8	
12.		07:01 A.M 08:00 A.M.	60.0	63.0	67.2	56.1	76.7	66.2	
13.		08:01 A.M 09:00 A.M.	59.9	63.3	74.9	57.0	77.1	69.5	
14.		09:01 A.M 10:00 A.M.	59.1	63.6	70.4	57.7	78.7	67.7	
15.	11.06.2021	10:01 A.M 11:00 A.M.	58.3	63.4	70.8	54.1	73.3	66.3	
16.		11:01 A.M 12:00 P.M.	61.8	67.3	76.9	60.3	86.0	74.4	
		L(Day)	65.9 Night Tin	71.0 ne ( 10:00 P.)	77.2 M. to 06:00	63.3 A.M.)	80.5	74.9	
17.	40.0	10:01 P.M 11:00 P.M.	42.5	48.5	73.7	41.2	74.2	69.7	70 dB(A)
18.	10.06.2021	11:01 P.M 00:00 A.M.	72.3	72.6	73.0	72.2	73.1	72.6	
19.		00:01 A.M 01:00 A.M.	72.3	72.4	72.6	72.2	72.7	72.4	
20.		01:01 A.M 02:00 A.M.	72.5	72.9	75.3	72.4	75.7	73.9	
21.	11.06.2021	02:01 A.M 03:00 A.M.	75.4	75.8	76.0	75.0	76.1	75.7	
22.	11.06.2021	03:01 A.M 04:00 A.M.	75.2	75.5	75.8	75.1	76.0	75.5	
23.		04:01 A.M 05:00 A.M.	43.4	75.2	75.6	40.9	75.9	73.5	
24.		05:01 A.M 06:00 A.M.	42.5	45.5	49.3	40.9	53.6	46.7	
		L(Night):	62.0	67.3	71.4	61.2	72.1	70.0	

AMBIENT NOISE LEVEL OF SMP, KPD-2 (Beside Shed No. 22) PRESENTED THROUGH HISTOGRAM

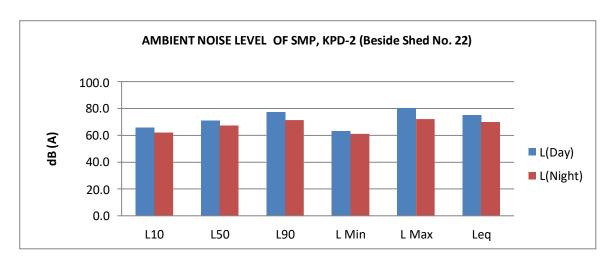

**Table: 3.7** 

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, NSD (Near Gate No. 7) Date of Monitoring: 09-10.06.2021

		Da	ay Time (	06:00 A.N	M. to 10:0	0 P.M.)			
Sl. No.	Date of Monitoring	Time		I	Noise Leve	el in dB(A	)		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010
			$L_{10}$	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$\mathbf{L}_{eq}$	under the Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	65.9	69.6	77.1	50.9	78.6	73.0	75 dB(A)
2.		01:01 P.M 02:00 P.M.	68.8	69.8	70.7	67.0	71.3	69.9	` ,
3.		02:01 P.M 03:00 P.M.	70.4	70.8	71.1	70.3	71.5	70.8	
4.		03:01 P.M 04:00 P.M.	45.8	69.7	70.4	44.1	71.2	68.3	
5.		04:01 P.M 05:00 P.M.	69.8	70.8	71.9	69.5	72.3	70.9	
6.		05:01 P.M 06:00 P.M.	53.5	71.7	75.8	47.1	76.2	72.6	
7.	09.06.2021	06:01 P.M 07:00 P.M.	75.0	75.4	78.0	74.7	78.6	75.8	
8.		07:01 P.M 08:00 P.M.	77.9	78.4	78.7	77.7	79.3	78.3	
9.		08:01 P.M 09:00 P.M.	77.1	77.4	78.3	76.8	78.7	77.6	
10.		09:01 P.M 10:00 P.M.	43.5	46.6	77.6	42.7	78.0	72.5	
11.		06:01 A.M 07:00 A.M.	61.4	63.8	69.7	61.0	79.6	67.4	
12.		07:01 A.M 08:00 A.M.	63.0	65.5	69.1	61.6	77.6	67.6	
13.		08:01 A.M 09:00 A.M.	60.5	63.9	71.5	58.2	79.0	68.5	
14.		09:01 A.M 10:00 A.M.	65.0	70.7	75.4	62.8	82.4	72.7	
15.	10.06.2021	10:01 A.M 11:00 A.M.	60.8	68.4	75.7	57.6	84.8	72.8	
16.		11:01 A.M 12:00 P.M.	58.5	66.5	74.8	56.9	83.9	72.2	
		L(Day)	63.5	68.7	74.1	61.2	77.7	71.9	
	-	Nig	ght Time	( 10:00 P.	M. to 06:0	0 A.M.)			
17.	09.06.2021	10:01 P.M 11:00 P.M.	61.1	63.4	66.5	50.7	73.5	64.6	70 dB(A)
18.	09.00.2021	11:01 P.M 00:00 A.M.	62.5	65.1	72.9	61.3	87.3	72.4	
19.		00:01 A.M 01:00 A.M.	62.6	63.9	67.0	61.1	71.3	65.1	
20.	7	01:01 A.M 02:00 A.M.	62.4	65.2	70.4	60.9	79.8	68.7	
21.	10.06.2021	02:01 A.M 03:00 A.M.	60.6	67.7	74.1	58.4	77.8	70.2	
22.	10.06.2021	03:01 A.M 04:00 A.M.	61.2	64.3	72.9	59.6	79.3	69.2	
23.		04:01 A.M 05:00 A.M.	60.2	62.6	68.5	59.8	78.4	66.1	
24.	7	05:01 A.M 06:00 A.M.	61.8	64.4	67.9	60.4	76.4	66.5	
		L(Night):	61.5	64.6	70.0	59.0	78.0	67.9	

AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 7) PRESENTED THROUGH HISTOGRAM

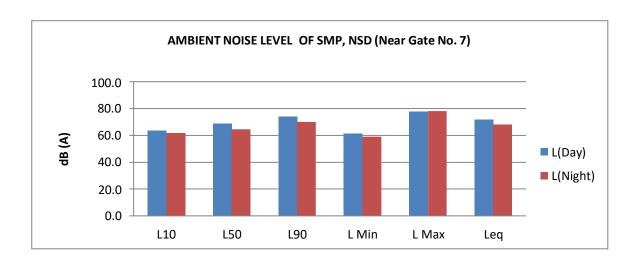



Table - 3.8

RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near Gate No. 3) Date of Monitoring: 09-10.06.2021

		D	ay Time (	( 06:00 A.	M. to 10:0	00 P.M.)			
Sl.	Date of	Time			Noise Leve	el in dB(A	.)		Norms as per 'The Noise Pollution
No.	Monitoring		L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$\mathbf{L}_{ ext{eq}}$	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986) for Industrial area
1.		12:01 P.M 01:00 P.M.	66.9	71.1	77.3	65.2	84.2	74.6	75 dB(A)
2.		01:01 P.M 02:00 P.M.	65.9	69.8	74.6	64.5	82.3	72.2	
3.		02:01 P.M 03:00 P.M.	66.0	69.1	73.9	63.7	79.7	71.1	
4.		03:01 P.M 04:00 P.M.	66.8	69.8	74.0	62.4	74.9	70.7	
5.		04:01 P.M 05:00 P.M.	65.1	68.9	73.2	62.7	79.6	70.4	
6.		05:01 P.M 06:00 P.M.	59.6	62.2	69.0	58.0	94.8	77.6	
7.	09.06.2021	06:01 P.M 07:00 P.M.	61.8	63.2	68.1	61.0	79.5	66.3	
8.		07:01 P.M 08:00 P.M.	62.0	63.6	65.5	61.5	71.9	64.4	
9.		08:01 P.M 09:00 P.M.	61.1	63.4	65.0	60.2	65.7	63.3	
10.		09:01 P.M 10:00 P.M.	61.8	63.4	64.8	60.6	68.4	63.6	
11.		06:01 A.M 07:00 A.M.	61.7	63.6	66.0	60.9	70.7	64.3	
12.		07:01 A.M 08:00 A.M.	63.6	64.9	69.6	63.2	73.4	66.6	
13.		08:01 A.M 09:00 A.M.	64.7	71.7	77.5	63.7	83.4	74.2	
14.		09:01 A.M 10:00 A.M.	60.3	69.8	76.4	56.4	87.8	74.9	
15.	10.06.2021	10:01 A.M 11:00 A.M.	54.9	58.9	72.3	54.0	80.8	68.7	
16.		11:01 A.M 12:00 P.M.	54.6	59.8	77.0	53.6	86.9	74.2	
		L(Day)	62.3	65.8	71.5	60.7	79.0	69.8	
		Ni	ight Time	( 10:00 P	.M. to 06:	00 A.M.)			
17.	09.06.2021	10:01 P.M 11:00 P.M.	62.5	63.8	65.6	61.6	71.3	64.4	70 dB(A)
18.	09.00.2021	11:01 P.M 00:00 A.M.	62.3	63.3	64.3	62.0	65.3	63.3	
19.		00:01 A.M 01:00 A.M.	62.7	63.4	64.5	62.0	68.4	63.7	
20.		01:01 A.M 02:00 A.M.	62.5	63.3	64.4	61.8	64.6	63.4	
21.	10.06.2021	02:01 A.M 03:00 A.M.	62.6	63.7	64.7	62.0	66.4	63.8	
22.	10.06.2021	03:01 A.M 04:00 A.M.	63.1	64.0	65.8	62.2	72.2	64.7	
23.		04:01 A.M 05:00 A.M.	63.4	64.8	66.2	61.8	68.0	65.0	
24.		05:01 A.M 06:00 A.M.	63.6	65.1	66.5	62.5	71.7	65.4	
		L(Night):	62.8	63.9	65.3	62.0	68.5	64.2	

#### AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 3) PRESENTED THROUGH HISTOGRAM

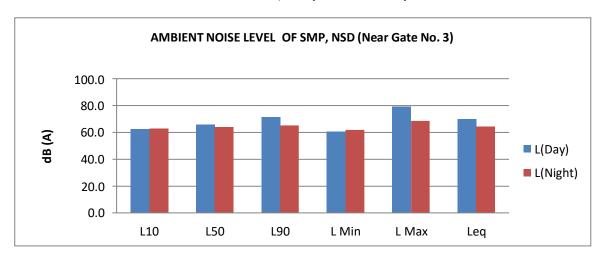

**Table: 3.9** 

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, KPD (Near Dry Dock Area-2)

Date of Monitoring: 12-13.07.2021

	Day Time ( 06:00 A.M. to 10:00 P.M. )										
Sl. No.	Date of Monitoring	Time		1	Noise Leve	el in dB(A	<b>.</b> )		Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide		
			$L_{10}$	L <sub>50</sub>	L <sub>90</sub>	$L_{ m Min}$	$\mathbf{L}_{ ext{Max}}$	$\mathbf{L}_{ ext{eq}}$	S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area		
1.		12:01 P.M 01:00 P.M.	69.7	73.9	80.1	68.0	87.0	77.4	75 dB(A)		
2.		01:01 P.M 02:00 P.M.	68.7	72.6	77.4	67.3	85.1	75.0			
3.		02:01 P.M 03:00 P.M.	68.8	71.9	76.7	66.5	82.5	73.9			
4.		03:01 P.M 04:00 P.M.	69.6	72.6	76.8	65.2	77.7	73.5			
5.		04:01 P.M 05:00 P.M.	67.9	71.7	76.0	65.5	82.4	73.2			
6.		05:01 P.M 06:00 P.M.	62.4	65.0	71.8	60.8	97.6	80.4			
7.	12.07.2021	06:01 P.M 07:00 P.M.	64.6	66.0	70.9	63.8	82.3	69.1			
8.		07:01 P.M 08:00 P.M.	64.8	66.4	68.3	64.3	74.7	67.2			
9.		08:01 P.M 09:00 P.M.	63.9	66.2	67.8	63.0	68.5	66.1			
10.		09:01 P.M 10:00 P.M.	64.9	66.3	67.6	63.4	72.4	66.5			
11.		06:01 A.M 07:00 A.M.	64.5	66.4	68.8	63.7	73.5	67.1			
12.		07:01 A.M 08:00 A.M.	66.4	67.7	72.4	66.0	76.2	69.4			
13.		08:01 A.M 09:00 A.M.	68.1	76.2	83.9	66.8	88.0	79.3			
14.		09:01 A.M 10:00 A.M.	69.2	73.3	78.5	67.8	87.0	76.4			
15.	13.07.2021	10:01 A.M 11:00 A.M.	68.5	72.7	77.4	66.9	81.0	74.3			
16.		11:01 A.M 12:00 P.M.	69.3	72.2	77.6	66.5	82.5	74.3			
		L(Day)	66.9	70.0	74.5	65.3	81.2	72.7			
	,				P.M. to 06		<u> </u>	1			
17.	12.07.2021	10:01 P.M 11:00 P.M.	61.6	62.9	64.7	60.7	70.4	63.5	70 dB(A)		
18.	-2.07.2021	11:01 P.M 00:00 A.M.	61.4	62.4	63.4	61.1	64.4	62.4			
19.		00:01 A.M01:00 A.M.	61.8	62.5	63.6	61.1	67.5	62.8			
20.		01:01 A.M02:00 A.M.	61.6	62.4	63.5	60.9	63.7	62.5			
21.	13.07.2021	02:01 A.M03:00 A.M.	61.7	62.8	63.8	61.1	65.5	62.9			
22.		03:01 A.M04:00 A.M.	62.2	63.1	64.9	61.3	71.3	63.8			
23.		04:01 A.M 05:00 A.M.	62.5	63.9	65.3	60.9	67.1	64.1			

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

24.	05:01 A.M06:00 A.M.	62.7	64.2	65.6	61.6	70.8	64.5
	L(Night):	61.9	63.0	64.4	61.1	67.6	63.3

#### AMBIENT NOISE LEVEL OF SMP, KPD (NEAR DRY DOCK AREA-2) PRESENTED THROUGH HISTOGRAM

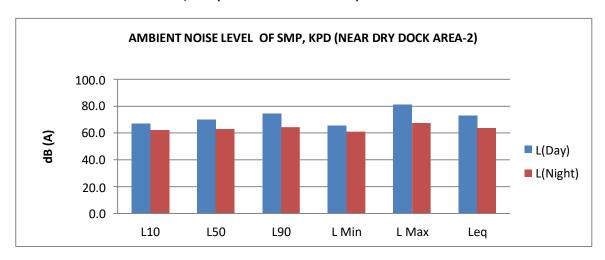


Table - 3.10

RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, KPD-2 (Beside Shed No. 22)

Date of Monitoring: 12-13.07.2021


			Day Time	e ( 06:00 A.N	M. to 10:00 I	P.M.)			
Sl. No.	Date of Monitoring	Time			Noise Level	in dB(A)			Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the
			L <sub>10</sub>	L <sub>50</sub>	L90	L <sub>Min</sub>	L <sub>Max</sub>	Leq	Environment (Protection) Act, 1986)' for Industrial area
1.		12:01 P.M 01:00 P.M.	68.7	73.3	80.8	54.6	82.3	76.7	75 dB(A)
2.		01:01 P.M 02:00 P.M.	72.5	73.4	74.4	70.7	74.9	73.5	
3.		02:01 P.M 03:00 P.M.	74.1	74.5	74.8	74.0	75.2	74.5	
4.		03:01 P.M 04:00 P.M.	49.5	73.4	74.3	47.8	74.9	72.0	
5.		04:01 P.M 05:00 P.M.	73.5	74.4	75.6	73.0	76.0	74.6	
6.		05:01 P.M 06:00 P.M.	57.2	75.4	79.4	50.8	79.9	76.2	
7.	12.07.2021	06:01 P.M 07:00 P.M.	78.7	79.1	81.4	78.4	82.3	79.5	
8.		07:01 P.M 08:00 P.M.	81.6	82.1	82.4	81.4	83.0	82.0	
9.		08:01 P.M 09:00 P.M.	80.8	81.1	82.0	80.5	82.4	81.3	
10.		09:01 P.M 10:00 P.M.	47.2	50.3	81.3	46.4	81.7	76.5	
11.		06:01 A.M 07:00 A.M.	54.5	61.5	71.7	53.0	87.2	71.3	
12.		07:01 A.M 08:00 A.M.	58.5	61.5	65.7	54.6	75.2	64.7	
13.		08:01 A.M 09:00 A.M.	58.4	61.8	73.4	55.5	75.6	68.0	
14.	13.07.2021	09:01 A.M 10:00 A.M.	57.6	62.1	68.9	56.2	77.2	66.2	

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

15.		10:01 A.M 11:00 A.M.	56.8	61.9	69.3	52.6	71.8	64.8	
16.		11:01 A.M 12:00 P.M.	60.3	65.8	75.4	58.8	84.5	72.9	
		L(Day)	64.4	69.5	75.7	61.8	79.0	73.4	
		N	light Time	( 10:00 P.	M. to 06:00	) A.M.)			
17.	12.07.2021	10:01 P.M 11:00 P.M.	41.5	47.5	72.7	40.2	73.2	68.8	70 dB(A)
18.	12.07.2021	11:01 P.M 00:00 A.M.	71.4	71.6	72.0	71.2	72.1	71.6	
19.		00:01 A.M 01:00 A.M.	71.3	71.4	71.6	71.2	71.7	71.4	
20.		01:01 A.M 02:00 A.M.	71.6	71.9	74.3	71.4	74.7	72.9	
21.	13.07.2021	02:01 A.M 03:00 A.M.	74.5	74.8	75.0	74.0	75.1	74.8	
22.	13.07.2021	03:01 A.M 04:00 A.M.	74.2	74.5	74.8	74.1	75.0	74.5	
23.		04:01 A.M 05:00 A.M.	42.5	74.3	74.6	39.9	74.9	72.5	
24.		05:01 A.M 06:00 A.M.	41.6	44.6	48.3	39.9	52.6	45.8	
		L(Night):	61.1	66.3	70.4	60.2	71.2	69.1	

AMBIENT NOISE LEVEL OF SMP, KPD-2 (BESIDE SHED NO. 22) PRESENTED THROUGH HISTOGRAM

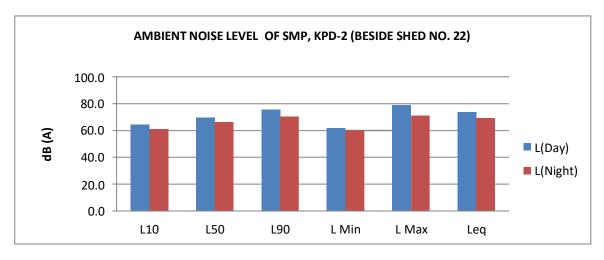

**Table: 3.11** 

#### **RESULTS OF AMBIENT NOISE LEVEL MONITORING**

Location: SMP, NSD (Near Gate No. 7)

Date of Monitoring: 15-

	Day Time ( 06:00 A.M. to 10:00 P.M. )									
Sl. No.	Date of Monitoring		I	Noise Leve	Norms as per 'The Noise Pollution (Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection)					
			L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$L_{eq}$	Act, 1986)' for Industrial area	
1.		12:01 P.M 01:00 P.M.	64.0	67.7	75.2	49.0	76.7	71.1	75 dB(A)	
2.	15.07.2021	01:01 P.M 02:00 P.M.	66.9	67.9	68.8	65.1	69.4	68.0		
3.		02:01 P.M 03:00 P.M.	68.5	68.9	69.2	68.4	69.6	68.9		

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

16.07.2021

4.		03:01 P.M 04:00 P.M.	43.9	67.8	68.5	42.2	69.3	66.4	
5.		04:01 P.M 05:00 P.M.	67.9	68.9	70.0	67.6	70.4	69.0	
6.		05:01 P.M 06:00 P.M.	51.6	69.8	73.9	45.2	74.3	70.7	
7.		06:01 P.M 07:00 P.M.	73.1	73.5	76.1	72.8	76.7	73.9	
8.		07:01 P.M 08:00 P.M.	76.0	76.5	76.8	75.8	77.4	76.4	
9.		08:01 P.M 09:00 P.M.	75.2	75.5	76.4	74.9	76.8	75.7	
10.		09:01 P.M 10:00 P.M.	41.6	44.7	75.7	40.8	76.1	70.6	
11.		06:01 A.M 07:00 A.M.	59.5	61.9	67.8	59.1	77.7	65.5	
12.		07:01 A.M 08:00 A.M.	61.1	63.6	67.2	59.7	75.7	65.7	
13.	]	08:01 A.M 09:00 A.M.	58.6	62.0	69.6	56.3	77.1	66.6	
14.		09:01 A.M 10:00 A.M.	63.1	68.8	73.5	60.9	80.5	70.8	
15.	16.07.2021	10:01 A.M 11:00 A.M.	58.9	66.5	73.8	55.7	82.9	70.9	
16.		11:01 A.M 12:00 P.M.	56.6	64.6	72.9	55.0	82.0	70.3	
		L(Day)	61.6	66.8	72.2	59.3	75.8	70.0	
		Nig	ght Time	( 10:00 P.)	M. to 06:0	0 A.M.)			
17.	15.07.2021	10:01 P.M 11:00 P.M.	59.2	61.5	64.6	48.8	71.6	62.7	70 dB(A)
18.	13.07.2021	11:01 P.M 00:00 A.M.	60.6	63.2	71.0	59.4	85.4	70.5	
19.		00:01 A.M 01:00 A.M.	60.7	62.0	65.1	59.2	69.4	63.2	
20.	]	01:01 A.M 02:00 A.M.	60.5	63.3	68.5	59.0	77.9	66.8	
21.	16.07.2021	02:01 A.M 03:00 A.M.	58.7	65.8	72.2	56.5	75.9	68.3	
22.	16.07.2021	03:01 A.M 04:00 A.M.	59.3	62.4	71.0	57.7	77.4	67.3	
23.	]	04:01 A.M 05:00 A.M.	58.3	60.7	66.6	57.9	76.5	64.2	
24.	]	05:01 A.M 06:00 A.M.	59.9	62.5	66.0	58.5	74.5	64.6	
		L(Night):	59.6	62.7	68.1	57.1	76.1	66.0	

AMBIENT NOISE LEVEL OF SMP, NSD (Near Gate No. 7) PRESENTED THROUGH HISTOGRAM

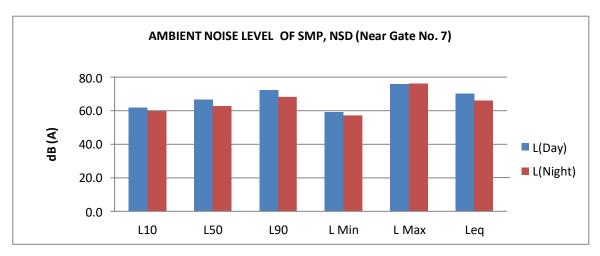


Table - 3.13
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location: SMP, NSD (Near Gate No. 3) Date of Monitoring: 15-16.07.2021

Day Time ( 06:00 A.M. to 10:00 P.M. )									
Sl. Date of Time Noise Level in dB(A) Norm								Norms as per 'The Noise Pollution	
No.	Monitoring		L <sub>10</sub>	$L_{50}$	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	$\mathbf{L}_{ ext{eq}}$	(Regulation and Control) Rules, 2000 (Vide S.O. 50 (E) dtd. 11.01.2010 under the Environment (Protection) Act, 1986)' for Industrial area
1.	15.07.2021	12:01 P.M 01:00 P.M.	65.0	69.2	75.4	63.3	82.3	72.7	75 dB(A)
2.	13.07.2021	01:01 P.M 02:00 P.M.	64.0	67.9	72.7	62.6	80.4	70.3	

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

3.		02:01 P.M 03:00 P.M.	64.1	67.2	72.0	61.8	77.8	69.2	
4.		03:01 P.M 04:00 P.M.	64.9	67.9	72.1	60.5	73.0	68.8	
5.		04:01 P.M 05:00 P.M.	63.2	67.0	71.3	60.8	77.7	68.5	
6.		05:01 P.M 06:00 P.M.	57.7	60.3	67.1	56.1	92.9	75.7	
7.		06:01 P.M 07:00 P.M.	59.9	61.3	66.2	59.1	77.6	64.4	
8.		07:01 P.M 08:00 P.M.	60.1	61.7	63.6	59.6	70.0	62.5	
9.		08:01 P.M 09:00 P.M.	59.2	61.5	63.1	58.3	63.8	61.4	
10.		09:01 P.M 10:00 P.M.	59.9	61.5	62.9	58.7	66.5	61.7	
11.		06:01 A.M 07:00 A.M.	59.8	61.7	64.1	59.0	68.8	62.4	
12.		07:01 A.M 08:00 A.M.	61.7	63.0	67.7	61.3	71.5	64.7	
13.		08:01 A.M 09:00 A.M.	62.8	69.8	75.6	61.8	81.5	72.3	
14.		09:01 A.M 10:00 A.M.	58.4	67.9	74.5	54.5	85.9	73.0	
15.	16.07.2021	10:01 A.M 11:00 A.M.	53.0	57.0	70.4	52.1	78.9	66.8	
16.		11:01 A.M 12:00 P.M.	52.7	57.9	75.1	51.7	85.0	72.3	
		L(Day)	60.4	63.9	69.6	58.8	77.1	67.9	
		Ni	ght Time	( 10:00 P	.M. to 06:	00 A.M.)			
17.	15.07.2021	10:01 P.M 11:00 P.M.	60.6	61.9	63.7	59.7	69.4	62.5	70 dB(A)
18.	15.07.2021	11:01 P.M 00:00 A.M.	60.4	61.4	62.4	60.1	63.4	61.4	
19.		00:01 A.M 01:00 A.M.	60.8	61.5	62.6	60.1	66.5	61.8	
20.		01:01 A.M 02:00 A.M.	60.6	61.4	62.5	59.9	62.7	61.5	
21.	16.07.2021	02:01 A.M 03:00 A.M.	60.7	61.8	62.8	60.1	64.5	61.9	
22.		03:01 A.M 04:00 A.M.	61.2	62.1	63.9	60.3	70.3	62.8	
23.		04:01 A.M 05:00 A.M.	61.5	62.9	64.3	59.9	66.1	63.1	
24.		05:01 A.M 06:00 A.M.	61.7	63.2	64.6	60.6	69.8	63.5	
		L(Night):	60.9	62.0	63.4	60.1	66.6	62.3	

#### AMBIENT NOISE LEVEL OF SMP, NSD (NEAR GATE NO. 3) PRESENTED THROUGH HISTOGRAM

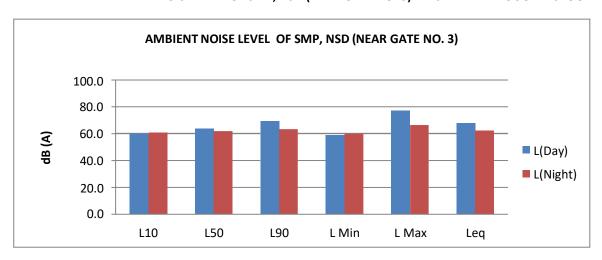


TABLE 3.12
NATIONAL AMBIENT NOISE LEVEL STANDARD

LIMITS IN d (B) A Leq									
AREA CODE	CATEGORY OF AREA	DAY TIME	NIGHT TIME						
А	INDUSTRIAL AREA	75	70						
В	COMMERCIAL AREA	65	55						

С	RESIDENTIAL AREA	55	45
D	SILENCE ZONE	50	40

### Note:

- 1. Day time is reckoned in between 6 a.m and 10 p.m
- 2. Night time is reckoned in between 10 p.m and 6 a.m
- 3. Silence zone is an area comprising not less than 100 metres around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority.
- 4. Mixed categories areas may be declared "as one of the four" above mentioned categories, by the Competent Authority.
- 5. dB (A) Leq denotes the time weighted average of the level of sound in decibels in scale A, which is relatable to human hearing.

A "decibel" is a unit in which the noise is measured.

"A", in dB (A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.

Leq: It is energy mean of the noise level over a specified period.

### Source:

The Principal Rules were published in the Gazette of India, vide no. S.O 123 (E), dated 14<sup>th</sup> February 2000 and subsequently amended vise S.O 1046 (E), dated 22<sup>nd</sup> November, 2000, S.O 1088 (E), dated 11<sup>th</sup> October, 2002, S.O (1569 (E), dated the 19<sup>th</sup> September, 2006 and S.O 50 (E) dated 11<sup>th</sup> January, 2010.

Chapter - 4

### 4.0 CHARACTERIZATIONS OF DRINKING WATER SAMPLES

### 4.1.00bjective:

Most important aim was to get an idea about the quality of the collected water samples, which were mainly used, for drinking purposes. The sampling of twosurface water sample,3 ground water samples and also collection of 3 supply water samples were carried out on July 10, 2020. The collected samples were analyzed at the laboratory of R. V. Briggs at Kolkata.

### 4.2.0Drinking Water Characterization:

### **Assessment:**

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

The drinking water quality was assessed for the following parameters:

- Total Coliform Organisms
- Faecal Coliform Organism
- pH
- Colour
- Turbidity
- Chloride
- Residual Chlorine
- Total Dissolved Solid

### 4.3.0 Plan of Sampling:

The details of the water sampling sites are as follows.

- (i) NS Dock Office
- (ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap
- (iii) Remount Road Quarter, 9 No. Civil Site Office
- (iv) Port Land Park Quarter, Civil Site Office
- (v) SMP Hospital, (KOL) Canteen # 09
- (vi) Canteen Aquaguard
- (vii) NS Dock Office, (Terminal)
- (viii) SMP Dock Office

### 4.5.0 Laboratory Determinations:

Bacteriological Count:The determination of Total coliform & Faecal Coliform count carried out according to the method prescribed by APHA 23rd Edn.9222 B & APHA 23rd Edn. 9222 D respectively.

pH value : The pH value was calculated in the laboratory according to the method *prescribed by* the American Public Health Association (APHA) in their Publication ( $22^{nd}$  edition – 1550 H + B).

Colour: The colour value was calculated in the laboratory according to the method prescribed IS: 3025-(part-4): 1983 Reaffirmed 2012.

Turbidity: The turbidity value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-10): 1984 Reaffirmed 2012.

Chloride: The chloride value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-32): 1988 Reaffirmed 2009.

Residual Chlorine: The residual chlorine value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-26): 1986 Reaffirmed 2009.

Total Dissolved Solid: The TDS value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-16): 1984 Reaffirmed 2012.

### REPORT OF DRINKING WATER

**Table - 4.1** 

Parameters	Report ID No. W(D)/21-22/884	Report ID No. W(D)/21-22/885	Report ID No. W(D)/21-22/886	Report ID No. W(D)/21-22/887
Coliform Organism	Absent	Absent	Absent	Absent
Faecal Coliform	Absent	Absent	Absent	Absent
Colour	1	1	1	1
Turbidity	1.0	< 1	< 1	2.8
pH value	8.0	7.6	7.5	7.4
<b>Total Dissolved Solids</b>	150	490	162	146
Chloride as Cl	15	140	15	17
Residual Free Chlorine	< 0.1	< 0.1	< 0.1	< 0.1

**Table - 4.2** 

Parameters	Report ID No. W(D)/21-22/888	Report ID No. W(D)/21-22/889	Report ID No. W(D)/21-22/890	Report ID No. W(D)/21-22/891
Coliform Organism	Absent	Absent	Absent	Absent
Faecal Coliform	Absent	Absent	Absent	Absent
Colour	1	1	1	1
Turbidity	<1	1.3	1.1	< 1
pH value	7.3	7.3	7.5	7.7
<b>Total Dissolved Solids</b>	156	510	492	236
Chloride as Cl	19	146	148	19
Residual Free Chlorine	< 0.1	< 0.1	< 0.1	< 0.1

### 4.9.1. Assessment of analytical Results against Standards:

As the above mentioned supply water samples were used mostly for drinking water and also for cooking purposes, So, the assessment was carried out as per the stipulated Standards of IS: 1622 (1981) for Bacteriological parameters and IS: 10,500 (2012) 2<sup>nd</sup> revision for other parameters respectively as specified by MoEF, Government of India:

### (a) Bacteriological Parameters:

The count of bacteriological parameters in terms of Total coliform count and Faecal (E.coli) Coliform Organisms were absent and are safe to consume in the collected samples.

### (b) Organoleptic and Physical Parameters:

pH, Turbidity and Total Dissolved Solids were within their respective acceptable limits.

Table - 4.3
NATIONAL DRINKING

Parameters	IS: 1050	ms as per 00, 2012 (2nd Rev.)							
Coliform Organism	Absent in 100 ml								
Faecal Coliform	Absent								
Colour	5 Max.	15 Max.							
Turbidity	1.0 Max.	5.0 Max.							
pH value	6.5 - 8.5	No Relaxation							
Total Dissolved Solids	500 Max.	2000 Max.							
Chloride as Cl	250 Max.	1000 Max.							
Residual Free Chlorine	0.2 min	1 Max.							

**WATER STANDARD** 

### **CHARACTERIZATIONS OF SURFACE WATERQUALITY**

### **Dock Basin & River Water Characterization:**

**Objective**: The main purpose of the study was to get an idea about the quality of Dock Basin & River water within the area of study. All together 4 Dock Basin warter samples and 2 River water samples were collected and were analysed within our present area of study.

Four (04) *Dock Basin* samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-28 KPD) and from (iv) KPD 1 (11 KPD) respectively.

Two (02) River water samples were collected from (i) Outside of NS Dock Basin on RIver, (ii) Outside of KP

Dock Basin on River.

Dock Basin & River water character of the present study areas were assessed in terms of the

following structure:

(a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count

(b) Organoleptic and Physical Parameters:

i) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids

(c) General Parameters Concerning Substances undesirable in Excessive Amounts:

(i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii)

COD.

: Plan of Sampling:

Altogether Dock Basin warter samples and 2 River water samples were collected from the locations

mentioned above (4.8.1). Major groundwater sources, the details of the water sampling sites were given in

the Table 4.3 a to 4.3 c.

**Sampling Procedure:** 

For each location three water samples were collected (Plate - 5) for the following analysis: (i)

Bacteriological analysis: The sample was collected in a pre-sterilised 250 ml. water bottle, wearing

throwaway gloves. The sample bottles were previously sterilized by autoclaving. Two layers of papers

covered the stopper and the neck of bottle, prior to sterilization. The opening and closing of the bottles in

the process of sample collection was carried out with meticulous care to avoid any bacterial contamination

from outside source. When water was collected from tube well, the mouth of the tube well was flamed for

10 minutes, and the water was allowed to run for 5 minutes before filling the bottle. The bottle was filled

up to neck leaving 3 inches air space vertically below the glass stopper. Immediately after collection, the

samples were transported to the R.V.Briggs laboratory in an ice – box, which was kept in temperatures

within 4°C. While for determination of other parameters like: non-metals:Colour, pH value, Turbidity, Total

Dissolved Solids, Total Suspended Solids, Dissolved Oxyzen, Salinity, Ammoniacal Nitrogen, Sulphate, oil &

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

Grease, BOD, COD a total quantity of 2.0 Liters of effluent was collected from the locations in separated

bottles. Before collection, the containers were washed with the sample water with vigorous shake. Then

the samplings were carried out from 60 cm deep inside .(i) In a dusky glass bottle of 1 litre capacity the

sample was collected for determination of Oil & Grease. (ii) Second sample was collected in a plastic

container of 1 litre capacity for testing of its pH, Total Suspended Solids, Chemical Oxygen Demand & Bio

Chemical Oxygen Demand. The D.O for the sample was measured at the sampling site. After collection, the

samples were immediately transported to the R.V.Brigg's laboratory at Kolkata. The whole collection

procedure was carried out in presence of KPT official.

: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981

pH value: The pH value was calculated in the laboratory according to the method prescribed

by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4550 H + B)

Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985

• Turbidity: The Turbidity value was calculated in the laboratory according to the method

prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition -2130 B)

 Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup>

edition – 2540 C)

Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the

method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup>

edition - 2540 D).

Oil & Grease: The Oil &Grease was measured in the laboratory according to the method

prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition

- 5520 B).

COD: The COD was measured in the laboratory according to the method prescribed by the

American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition - 5220 B).

BOD: The BOD was measured in the laboratory according to the method prescribed by the IS

3025 (Part 44) 1966.

- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition - 2520 B).
- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by
   I.S. 3025 (Part 24) 1986.

Assessment of Analytical Results against Standards of Dock Basin & River water: (Table 5.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value : It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids
- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Table 5.1

Analytical Results of Surface Water Sample collected from the above-mentioned locations

Surface Water (River Water)

			Our Ref. N	o./ Location	
Sl.	Test Parameters	Unit	E(D)/21-22/ 342	E(D)/21-22/ 343	Norms as per IS:
No.	rest rurameters		Outside NS Dock Basin	Outside KP Dock Basin	2296-1982 (Class C)
			on River, 02.07.2021	on River, 02.07.2021	
1	Colour	Hazen	Colourless	10	300 (Max.)
2	pH Value		7.39	7.53	6.5 - 8.5
3	Total Dissolved Solids (TDS)	mg/l	460.0	278.0	1500 (Max.)
4	Dissolved Oxygen (DO)	mg/l	7.2	5.9	4 (Min.)
5	Oil and Grease (O & G)	mg/l	1.23	1.5	0.1 (Max.)
6	BOD for 3 days at 27°C (BOD)	mg/l	7.5	17.00	3 (Max.)
7	Sulphate as SO <sub>4</sub>	mg/l	43.5	28.3	400 (Max.)
8	Turbidity	mg/l	3.3	75.6	
9	Ammoniacal Nitrogen as NH <sub>3</sub> .N	mg/l	< 0.2	0.033	
10	Salinity	PSU	0.4439	0.2508	
11	Total Suspended Solids (TSS)	mg/l	< 10	149.0	
12	Chemical Oxygen Demand (COD)	mg/l	27.0	53.0	
13	Total Coliform/100 ml.	MPN	220	9,200	5000 (Max.)
14	Faecal Coliform/100 ml.	MPN	130	3,500	

CHARACTERISATION OF EFFLUENTS

**Waste Water Characterization:** 

**Objective**: The main purpose of the study was to get an idea about the quality of Effluents within

the area of study. All together 4 Effluent samples were collected and were analysed within our present

area of study.

Four (04) Effluent samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-28

KPD) and from (iv) KPD 1 (11 KPD) respectively.

Effluent character of the present study areas were assessed in terms of the following structure:

(a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count

(b) Organoleptic and Physical Parameters:

ii) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids

(c) General Parameters Concerning Substances undesirable in Excessive Amounts:

(i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii)

COD.

: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

• Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981

pH value: The pH value was calculated in the laboratory according to the method prescribed

by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4550 H + B)

Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985

Turbidity: The Turbidity value was calculated in the laboratory according to the method

prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition -

2130 B)

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED. 9, Bentinck Street, Kolkata – 700001.

Phone: 2248-3661/2698, 2262-4153/4154 \Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

Page 77

- $\bullet$  Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2540 C)
- Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2540 D).
- Oil & Grease: The Oil &Grease was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition - 5520 B).
- COD: The COD was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition - 5220 B).
- BOD: The BOD was measured in the laboratory according to the method prescribed by the IS 3025 (Part 44) 1966.
- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2520 **B**).
- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by
   I.S. 3025 (Part 24) 1986.

Assessment of Analytical Results against Standards of Effluent: (Table 6.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value : It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids

- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Table 6.1

ANALYTICAL RESULTS OF THE EFFLUENTSAMPLES COLLECTED

### **Effluent (Dock Basin Water)**

				Our Ref. No	./ Location		
GI			E(D)/21-22/ 344	E(D)/21-22/ 345	E(D)/21-22/ 346	E(D)/21-22/ 347	Limit as per Environmental
Sl. No.	Test Parameters	Unit	7/8 N.S. Dock,	N.S. D. Lock Entrance,	KPD 2 (26-28 KPD),	KPD 1 (11 KPD),	Protection Act, MOE & F for Effluent
			02.07.2021	02.07.2021	02.07.2021	02.07.2021	discharged into Inland surface water
1	pH Value		7.59	7.46	7.86	7.64	5.5 - 9.0
2	Turbidity	NTU	2.1	78.3	78.3	2.9	
3	Total Suspended Solids (TSS)	mg/l	14.0	179.0	12.0	20.0	100 (Max.)
4	Ammoniacal Nitrogen as NH <sub>3</sub> -N	mg/l	< 0.2	< 0.2	< 0.2	< 0.2	50 (Max.)
5	Oil and Grease (O & G)	mg/l	< 6.0	< 6.0	< 6.0	< 6.0	10 (Max.)
6	BOD for 3 days at	mg/l	6.2	26.0	12.0	< 5	30 (Max.)

	27°C (BOD)						
7	Chemical Oxygen Demand (COD)	mg/l	23.0	72.0	34.0	19.0	250 (Max.)
8	Sulphate as SO <sub>4</sub>	mg/l	41.8	70.5	64.0	45.50	
9	Colour		Colourless	10 Hazen	Colourless	Colourless	
10	Salinity	PSU	0.4562	0.4378	0.3587	0.2390	
11	Total Dissolved Solids (TDS)	mg/l	472.0	454.0	280.0	258.0	
12	Dissolved Oxygen (DO)	mg/l	7.5	6.80	7.70	7.0	
13	Total Coliform/100 ml. (TC)	MPN	540	920	280	350	
14	Faecal Coliform/100 ml. (FC)	MPN	240	350	110	130	1000 (Max.)

# PERIODIC ENVIRONMENTAL MONITORING REPORT AUGUST' 2021 TO DECEMBER' 2021

Chapter - 1

1.0 INTRODUCTION: Pollution is emerging as one of the most significant and challenging

environmental problems of our modern Society. The Syama Prasad Mookherjee Port( Kolkata) is

situated on the left bank of the Hooghly River at 22°32′53″N 88°18′05″E about 203 km (126 mi)

upstream from the sea. The pilotage station is at Gasper/ Saugor roads, 145 Kilometres to the south of

the KDS (around 58 km from the sea). The system consists of. Kidderpore Docks (K.P. Docks): 18

Berths, 6 Buoys / Moorings and 3 Dry Docks. Kolkata Port Trust (officially renamed after the name of

BJS founder as Dr. Syama Prasad Mukherjee Port Trust, is the only riverine major port of

India located in the city of Kolkata, India, It is the oldest operating port in India, and was constructed by

the British East India Company.

Major air pollutants generated by port activities include carbon monoxide (CO), volatile organic

compounds (VOCs), nitrogen oxides (NOx), sulfur oxides (SOx), and particulate matter (PM).

Prolonged exposure to these compounds can effect health include respiratory diseases, cardiovascular

disease, lung cancer and premature death.

Noise from port areas comes not only from ferries, ships and trade but also from industrial and

shipyards activities as well as auxiliary services. In this way, noise pollution can produce negative

effects both to the natural eco-system and to the urban population.

Port operations can cause significant damage to water quality—and subsequently to marine life and

ecosystems, as well as human health. These effects may include bacterial and viral contamination of

commercial fish and shellfish, depletion of oxygen in water, and bioaccumulation of certain toxins in

fish.8 Major water quality concerns at ports include wastewater and leaking of toxic substances from

ships, stormwater runoff, and dredging

Waste management is the most important part in the port areas. Waste management relates to all

kinds of wastes, both liquid and solid, likely to be disposed of in the port area. These wastes include

dredged materials, garbage and oily mixtures discharged from ships, wastes from cargo operations,

and all types of discharges from municipal and waterfront industry activities.

**1.1.0 Scope of Work:** The periodic measurement of Ambient Air quality, Meteorological

observation, Ambient Noise quality, Surface water quality, Drinking water quality and also Effluent

quality studies were carried out for the session Auhust' 2021 to December' 2021. M/s R. V. Briggs &

Co. Pvt. Limited, 9, Bentinck Street, Kolkata – 700001, performed the whole work. Funding and other

logistic supports were provided by KPT, Khidderpore. According to the work order, the scopes of work

logistic supports were provided by IVI 1, IVIII derpore. According to the work order, the scopes of

included are as follows:

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED.

Page 81

- 1.1.1 The whole work was executed for determination of Respirable Particulate matter (PM10), Particulate matter PM2.5, Oxides of Sulfur (SO<sub>2</sub>), Oxides of nitrogen (NO<sub>x</sub>), Carbone Monoxide(CO) from each sample. Systematic evaluation of Ambient Air quality took place for 8 hourly for 24 hours for PM10, SO<sub>2</sub>, NO<sub>2</sub> & CO and PM<sub>2.5</sub>, one sample for 24 hour basis at four (04) locations.
- i) SMP, KPD (Near Dry Dock Area-2)
- ii) SMP, KPD-2 (Beside Shed No. 22)
- iii) SMP, NSD (Administrative Building)
- iv) SMP, NSD (Berth No 4)

The whole work was executed for determination of Respirable Particulate matter (PM10), Particulate matter (PM2.5), Oxides of Sulfur (SO<sub>2</sub>), Oxides of nitrogen (NO<sub>x</sub>), Carbone Monoxide(CO) from each sample.

On each day of sampling at each stations samples for all five parameters (PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub> and NO<sub>2</sub>) were collected as follows:

- i) PM<sub>10</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- ii) PM<sub>2.5</sub> 1 (one) shift of 24 (twenty four) hrs. twice in a week for a every 3 months for a period of one year
- iii) SO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year iv) NO<sub>2</sub> 3 (three) shifts of 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- v) CO 8 (eight) hrs. each twice in a week for every 3 months for a period of one year
- **1.1.2 Ambient Noise level monitoring:** It was carried out for 24 hourly basis in every month from the following four (04) Locations:
- i) KPD, (Near Dry Dock Area 2)
- ii) KPD-2, (Beside Shed No. 22)
- iii) NSD, (Near BERTH No. 7)
- iv) NSD, (Near BERTH No. 3)
- . All the study work was carried out for determination of  $L_{eq}$ ,  $L_{max}$ ,  $L_{min}$ ,  $L_{day}$ ,  $L_{night}$ ,  $L_{10}$ ,  $L_{50}$  and  $L_{90}$ , etc from each locations as per the Principal rules were published in the Gazette of India vide number, S.O 123 (E), dated 14<sup>th</sup> February, 2000 and subsequently amended vide S.O 1046 (E), dated 22 <sup>nd</sup>

November, 2000, S.O 1088 (E), dated 11 <sup>th</sup> October, 2002, S.O, 1569 (E), dated the 19 <sup>th</sup> September, 2006 and S.O 50 (E) dated 11 <sup>th</sup> January, 2010.).

### 1.1.3 Water sample collection:

- Drinking Water samples collected from
  - (i) Head Office Canteen
  - (ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap.
  - (iii) Remount Road Quarter, 9 No. Civil Site Office
  - (iv) Port Land Park Quarter, Civil Site Office
  - (v) SMP Kolkata Hospital Canteen # 09
  - (vi) Container Terminal Office, (NSD)
  - (vii) NS Dock Office ,(WTP)
  - (viii) KP Dock Office

Following parameters were determined from the sample: pH, Colour, Turbidity, Chloride, Residual chlorine, Total Dissolved Solid, Coliform Bacteriological count as per stipulated norms for analysis of Drinking Water Quality of Central Pollution Control Board,

The following parameters were taken into consideration for drinking water analysis:

- (a) Microbiological Tests: (i) Total Coliform Organism / 100 ml. of water, (ii) Faecal (E.Coli) coliform Count
- Dock Basin Water samples collected from
  - (i) 7 8 N.S. Dock
  - (ii) N.S.D. Lock Entrance
  - (iii) KPD 2 (26-28 KPD)
  - (iv) KPD 1 (11 KPD)
- River Water samples collected from
- (i) Outside NS Dock Basin on River
- (ii) Outside KP Dock Basin on River
- Following parameters were determined from the sample: pH, Colour, TURBIDITY, Dissolved Oxygen (D.O), Bio Chemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Oil & Grease, Sulphate, Ammoniacal Nitrogen (NH<sub>4</sub> N), Total Dissolved Solid, Total Suspended Solid, Saliniy, Coliform Bacteriological count as per stipulated norms for analysis of Dock Basin & River Water Quality of Central Pollution Control Board,

STAWAT KABAD WOOKILKILL TOKT, KOLKATA
1.2.0 Period of Study: The entire study period was on selected days between Aug' 2021 to Dec' 2021.
The state of the s
1.3.0 Work load Completed: The environmental sampling and related studies that were carried out in
the field and at the R.V.Briggs laboratory

Chapter - 2

### 2.0 AMBIENT AIR QUALITY STUDIES

**2.1.0 Objective:** The most important objective of the study was to obtain a valid idea about the prevailing ambient air quality over the entire project area, during August 2021 to December' 2021

2.2.0 Work Elements: The main objectives of the study are:-

As per the work order, the following work elements were evaluated:

- (a) Collection of ambient air samples for 24 hourly period from 4 air sampling stations as per para 1.1.1, for determination of the concentration of the following pollutants:
- i) Respirable Particulate matter (RPM), (ii) Suspended Particulate Matter (SPM), (iii) Sulphur Dioxide (SO<sub>2</sub>), (iv) Nitrogen Oxide (NOx), (v) Carbone Monoxide respectively.
- **2.3.0 Preparation of Sampling Sites:** At each of the air sampling stations, the actual site of placement of air sampling equipments were prepared according to the guide lines stipulated in IS: 5182 of Bureau of Indian Standard approved by the Ministry of Environment & Forests (MoEF), Government of India.
- **2.4.0 Duration of Air Sampling:** Air sampling operations were fixed for 24 hours in 3 shifts and were splits into eight hours duration in each shift for 4 stations. So, 12 samples were collected from these stations. Therefore, altogether 12 samples were taken into consideration.

### 2.6.0 Sampling Equipment & Methodology:

- i. Air samples collected by using Respirable dust sampler Machine (Envirotech, APM 460 BL)
- ii. PM2.5 samples collected by using PM2.5 sampler (Instrumex, Model: IPM-FDS/MFC-2500, Polltech, Model: PEM-ADS2.5 & Envirotech Model: APM 550 MFC)

### 2.7.0 Laboratory Determination:

**2.7.1 Respirable Particulate Matter (PM10)**:- For every station and for every shift, one Glass micro fibre filter paper with a dimension of  $203 \text{ mm} \times 254 \text{ mm}$  was used to collect air samples. At each station, a total time period of 24 hours duration was taken into consideration for collection of samples. Which was splits into 3 shifts each of 8 hours duration. Thus, for a 24 hours monitoring a total number of 3 filter papers were used. So, for four (4) stations in total  $3 \times 4 = 12$  samples were collected.

Before sampling, all these filter papers were dried in an air oven followed by drying in desiccators. The dried filter papers were weighed and then fitted in the high volume air sampler. The filter papers were re-weighted at the end of the duration of sampling (8 hours or 6 hours). From the weight indicate the weight of RPM particle collected over a period of 8 hours or 6 hours. From the corresponding data on total volume of air,

which passed through the sampling machine over the same duration of time, the concentration of RPM was computed in terms of µg/m³ of air. The assessments were made according to their respective land use

categories.

2.7.2: Particulate Matter (PM2.5):

The pre-weighed filter paper, in which PM2.5 particles were collected, were weighed both in the pre and

post monitoring times. The gain in weight indicated the total weight of PM2.5 collected during 24 hour

sampling time. From the corresponding data on total volume of air drawn in by the sampling machine, the

concentration of PM2.5 was computed in  $\mu g/m^3$  of air.

2.7.3: Sulphur Di Oxide (SO<sub>2</sub>):

SO<sub>2</sub> in the ambient air was absorbed in 0.05 (M) potassium tetrachloromercurate solution at a flow rate 0.5

litre / minute. It was analysed spectrophotometrically after developing the colour for 30 minutes by

adding sulphamic acid, Formaldehyde and P – rosaniline hydrochloride solution as per IS:5182 (Part – II)

2001 (West & Gacke method) and recorded the absorbance at 560 mm. Then the concentration of SO<sub>2</sub>

was measured by standard curve and represented the results as µg/m<sup>3</sup> in respect of air volume.

2.7.4: Nitrogen Oxides (NO<sub>x</sub>):

NO<sub>x</sub> was collected by bubbling air through 0.1 (N) sodium hydroxide and sodium arsenite solution at flow

rate 0.4 lit /min. It was analyzed spectrophotometrically after developing the colour for 10 minutes by

adding Hydrogen peroxide, sulphanilamide and NEDA solution as per IS: 5182 (Part - VI) 2006 (Jacobs &

Hochheiser method ) and recorded the absorbance at 540 mm. Then the concentration of NO<sub>x</sub> was

measured by standard curve and represented the result as µg/m<sup>3</sup> in respect of air volume.

2.7.5: Carbone monoxides (CO):

CO was collected in a bladders and estimated by CO Analyzer and Orsat.

2.8.0 Results of laboratory determinations:

The salient findings of concentrations of RPM, PM2.5, CO, SO<sub>2</sub> and NOx (Table 2.1) of this study are as

follows:

Prepared by R.V.BRIGGS & CO. PRIVATE LIMITED. 9, Bentinck Street, Kolkata – 700001.

### 2.8.1 Ambient Air Quality:

Near Dry Dock Area-2.:-

The concentration of **PM2.5** ranged from 70  $\mu$ g/m<sup>3</sup> to 135  $\mu$ g/m<sup>3</sup> with a mean value of 104  $\mu$ g/m<sup>3</sup>.

The concentration of **PM**10 ranged from 118  $\mu$ g/m³ to 259  $\mu$ g/m³ with a mean value of 173  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 3.6  $\mu$ g/m³ to 7.2  $\mu$ g/m³ of air with a mean value of 4.6  $\mu$ g/m³ of air While the concentration of **NO**x ranged from 28.4  $\mu$ g/m³ to 55.1  $\mu$ g/m³ of air with a mean value of 42.8  $\mu$ g/m³ of air and the concentration of **CO** ranged from 0.829 mg/m³ to 1.073 mg/m³ of air with a mean value of 0.991 mg/m³ of air.

Observation: PM2.5 & PM10 are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009. It may due to continuous movement of vehicles, loading of container, other activities and effect of seasonal variation. Others parameters like SO2, NO2 & Co are well within the norms.

### Beside Shed No:22.:-

The concentration of **PM2.5** ranged from 75  $\mu$ g/m<sup>3</sup> to 144  $\mu$ g/m<sup>3</sup> with a mean value of 105  $\mu$ g/m<sup>3</sup>.

The concentration of **PM**10 ranged from 134  $\mu$ g/m³ to 357  $\mu$ g/m³ with a mean value of 203  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 3.2  $\mu$ g/m³ to 7.8  $\mu$ g/m³ of air with a mean value of 4.7  $\mu$ g/m³ of air While the concentration of **NO**x ranged from 31.6  $\mu$ g/m³ to 58.3  $\mu$ g/m³ of air with a mean value of 44.4  $\mu$ g/m³ of air and the concentration of **CO** ranged from 0.912 mg/m³ to 1.062 mg/m³ of air with a mean value of 0.984 mg/m³ of air.

Observation: PM2.5 & PM10 are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009. It may due to continuous movement of vehicles, loading of container, other activities and effect of seasonal variation. Others parameters like SO2, NO2 & Co are well within the norms

### Administrative Building.:-

The concentration of **PM2.5** ranged from 67  $\mu$ g/m<sup>3</sup> to 134  $\mu$ g/m<sup>3</sup> with a mean value of 95  $\mu$ g/m<sup>3</sup>.

The concentration of **PM**10 ranged from 90  $\mu$ g/m³ to 326  $\mu$ g/m³ with a mean value of 181  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 3.2  $\mu$ g/m³ to 5.5  $\mu$ g/m³ of air with a mean value of 4.5  $\mu$ g/m³ of air While the concentration of **NO**x ranged from 32.0  $\mu$ g/m³ to 53.9  $\mu$ g/m³ of air with a mean value of 44.1  $\mu$ g/m³ of air and the concentration of **CO** ranged from 0.921 mg/m³ to 1.042 mg/m³ of air with a mean value of 0.980 mg/m³ of air.

Observation: PM2.5 & PM10 are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16th November 2009. It

may due to continuous movement of vehicles, loading of container, other activities and effect of seasonal variation. Others parameters like SO2, NO2 & Co are well within the norms

### • BERTH No – 4, NS Dock

The concentration of **PM2.5** ranged from  $73\mu g/m^3$  to  $142 \mu g/m^3$  with a mean value of  $100 \mu g/m^3$ .

The concentration of **PM**10 ranged from 111  $\mu$ g/m³ to 302  $\mu$ g/m³ with a mean value of 183  $\mu$ g/m³ of air. Concentration of **SO**<sub>2</sub> ranged from 3.8  $\mu$ g/m³ to 5.7  $\mu$ g/m³ of air with a mean value of 4.5  $\mu$ g/m³ of air While the concentration of **NO**x ranged from 27.8  $\mu$ g/m³ to 53.1  $\mu$ g/m³ of air with a mean value of 44.2  $\mu$ g/m³ of air and the concentration of **CO** ranged from 0.913 mg/m³ to 1.033 mg/m³ of air with a mean value of 0.972 mg/m³ of air.

Observation: PM2.5 & PM10 are found to be above the norms as per National ambient Air Quality of MINISTRY OF ENVIRONMENT AND FOREST NOTIFICATION New Delhi, on 16<sup>th</sup> November 2009. It may due to continuous movement of vehicles, loading of container, other activities and effect of seasonal variation. Others parameters like SO2, NO2 & Co are well within the norms

### AMBIENT AIR QUALITY STYDY HAD BEEN DEPICTED THROUGH PHOTOGRAPHS



Table - 2.1


LAND USE CATEGORY – WISEDISTRIBUTION OF AIR SAMPLING STATIONS AND ITS ANALYTICAL RESULTS (AUGUST' 2021 TO DECEMBER' 2021)

Location : SMP, KPD (Near Dry Dock Area-2)

Period : 08.12.2021 to 31.12.2021

Date of Inspection						U	nit in µg/r	n³							Unit in	mg/m³	
	PM2.5		PN	110			sc	)2		NO2				со			
	Daily Avg.	Shift-	Shift-	Shift- 3	Daily Avg.	Shift-	Shift- 2	Shift-	Daily Avg.	Shift- 1	Shift- 2	Shift-	Daily Avg.	Shift-1	Shift-2	Shift-3	Daily Avg.
08.12.2021	70	126	146	145	139	4.2	4.7	4.5	4.5	42.6	45.6	47.0	45.1	1.005	0.967	0.829	0.93
14.12.2021	95	137	166	218	174	4.5	3.6	3.8	4.0	30.1	36	37.5	34.5	0.998	1.002	0.942	0.981
11.12.2021	80	146	157	204	169	7.2	5.7	4.9	5.9	47	55.1	47.8	50.0	1.054	1.073	1.021	1.049
24.12.2021	135	161	186	259	202	4.7	4.2	4.0	4.3	39.7	47.8	39.7	42.4	1.025	0.983	0.905	0.971
27.12.2021	119	132	188	259	193	3.8	4.5	4.7	4.3	47	55.1	47.8	50.0	1.015	1.029	0.987	1.010
30.12.2021	125	118	171	198	162	4.2	4.5	5.1	4.6	28.4	38.6	37.2	34.7	1.005	1.021	0.98	1.002
Norms NAAQM	60				100				60				60				5.0

### HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD (Near Dry Dock Area-2)

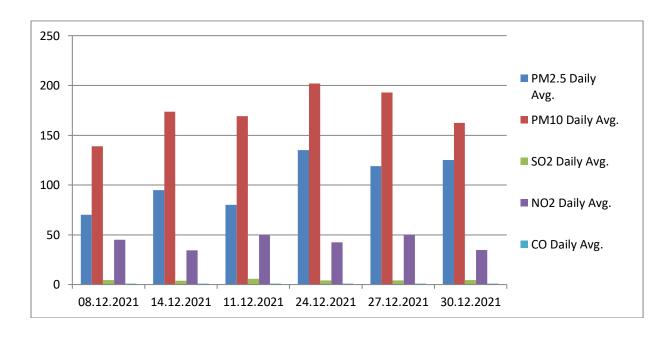


**Table - 2.2** 

Location : SMP, KPD-2 (Beside Shed No. 22)

Period : 08.12.2021 to 31.12.2021

Date of Inspection						Ur	nit in µg	/m³							Unit in	mg/m³		
	PM2.5		PM10				SO2				NO2				со			
	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Dail y Avg	Shift- 1	Shif t-2	Sh ift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	
08.12.2021	87	134	146	172	151	4.2	3.4	3.2	3.6	31.6	44.1	40.4	38.7	0.974	0.952	0.933	0.953	
14.12.2021	75	179	246	205	210	7.8	6.8	5.3	6.6	48.7	58.3	53.1	53.4	1.049	1.062	1.031	1.047	
11.12.2021	97	142	187	217	182	4.7	4.5	4	4.4	37.6	40.6	33.2	37.1	0.943	0.982	0.937	0.954	
24.12.2021	144	213	321	357	297	4.5	4.7	4.5	4.6	40.6	50.9	48.7	46.7	0.977	0.992	0.912	0.96	
27.12.2021	126	168	202	190	187	5.7	4.9	4	4.9	48.5	58	52.9	53.1	1.035	1.020	0.967	1.007	
30.12.2021	103	166	194	206	189	4	4.5	4.2	4.2	33.3	46.2	32.6	37.4	1.005	0.989	0.959	0.984	
Norms NAAQM	60				100				60				60				5.0	

### HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, KPD-2 (Beside Shed No. 22)

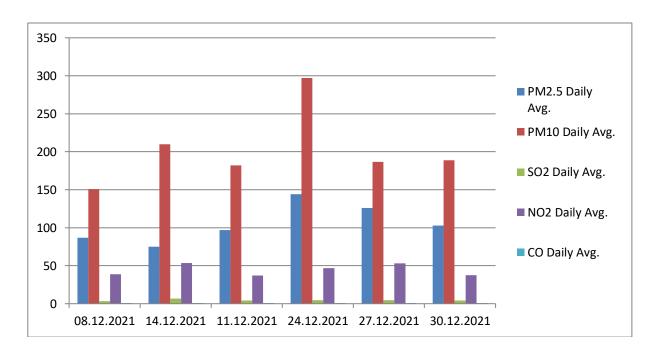


**Table - 2.3** 

Location : SMP, NSD (Administrative Building

Period : 08.12.2021 to 31.12.2021

Date of Inspection						U	nit in µg/	m³							Unit in	mg/m³	
	PM2.5		PN	110			S	02		NO2				со			
	Daily Avg.	Shift -1	Shift -2	Shift -3	Daily Avg.	Shift -1	Shift -2	Shift -3	Daily Avg.	Shift -1	Shift -2	Shift -3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.
08.12.2021	67	90	106	188	128	3.2	4.5	5.1	4.27	48.0	53.9	46.5	49.5	1.016	0.991	0.944	0.984
14.12.2021	72	143	156	190	163	5.1	5.3	4.7	5.0	47.8	53.6	46.3	49.2	1.024	1.037	0.997	1.019
11.12.2021	79	128	189	187	168	4.9	5.5	4.0	4.8	36.2	42.8	37.6	38.9	0.926	0.955	0.921	0.934
24.12.2021	128	131	209	241	194	4.2	4.5	4.2	4.3	36.9	42.8	45.0	41.6	1.012	0.966	0.944	0.974
27.12.2021	134	197	243	326	255	5.3	4.7	4.0	4.7	48.0	53.9	46.5	49.5	1.042	1.008	0.946	0.999
30.12.2021	89	177	184	176	179	3.6	4.0	4.2	3.9	32.0	40.8	34.7	35.8	0.949	1.002	0.967	0.973
Norms NAAQM	60				100				60				60				5.0

### HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (Administrative Building)

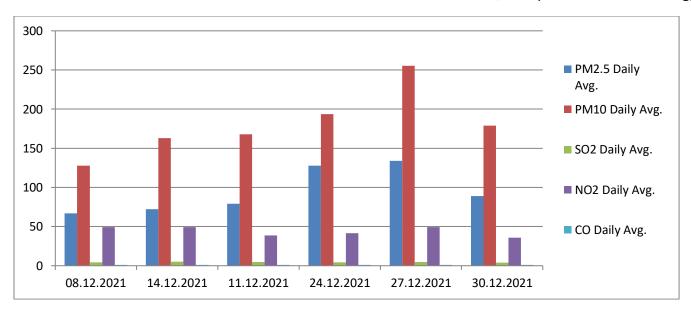


**Table - 2.4** 

Location : SMP, NSD (BERTH NO - 4)
Period : 08.12.2021 to 31.12.2021

Date of Inspection						Ur	nit in µg	/m³						Unit in mg/m³				
-	PM2.5	5 PM10				SO2				NO2				со				
	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Dail y Avg	Shift- 1	Shif t-2	Sh ift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	Shift- 1	Shift- 2	Shift- 3	Daily Avg.	
08.12.2021	78	111	138	168	139	4.5	5.1	4.2	4.6	50.2	53.1	52.4	51.9	1.023	0.965	0.913	0.967	
14.12.2021	97	124	197	199	173	4.5	5.3	5.7	5.2	45.6	42.6	48.5	45.6	1.033	1.018	0.976	1.009	
11.12.2021	73	132	149	185	155	3.8	4.0	4.5	4.1	33.2	48.0	43.5	41.6	0.929	0.938	0.920	0.929	
24.12.2021	133	143	258	302	234	4.5	4.0	3.8	4.1	38.4	47.2	48.0	44.5	1.005	0.966	0.952	0.974	
27.12.2021	142	190	246	281	239	4.9	4.2	4.5	4.5	45.7	42.8	48.7	45.7	1.019	0.992	0.975	0.995	
30.12.2021	77	134	161	182	159	4.7	4.0	4.2	4.3	27.8	39.3	41.3	36.1	0.935	0.988	0.956	0.960	
Norms NAAQM	60				100				60				60				5.0	

### HISTOGRAM OF RESULTS OF AMBIENT AIR QUALITY MONITORING of SMP, NSD (BERTH NO - 4)

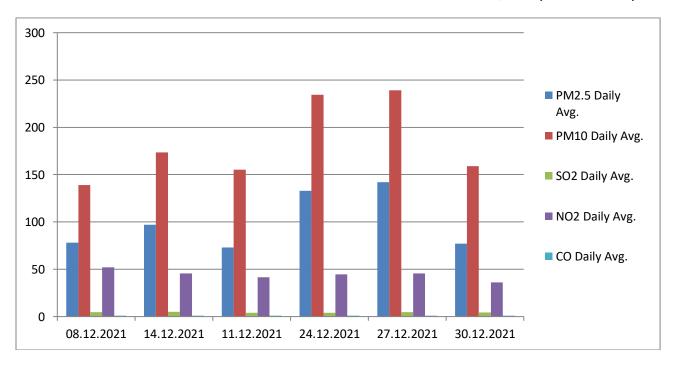

# Table – 2.5 [SCHEDULE VII] [See rule 3 (3B)] National Ambient Air Quality Standards

Pollutants	Time Weighted	Concentration in An	nbient Air (µg / m³ of air)
Tonutants	Average	Industrial, Residential, Rural & Other Areas	Ecologically Sensitive Areas
Sulphur Dioxide (SO <sub>2</sub> )	Annual Average *	50	20
	24 hours**	80	80
Nitrogen Dioxide (NO <sub>2</sub> )	Annual Average *	40	30
	24 hours**	80	80
Carbon monoxide	8 hours**	2	2
(CO)	1 hours**	4	4
Particulate Matter (PM10) (size less than 10µm) or	Annual Average *	60	60
PM <sub>10</sub>	24 hours**	100	100
Particulate Matter (PM2.5) (size less than 2.5µm	Annual Average *	40	40
,	24 hours**	60	60

<sup>\*</sup> Annual Arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform interval \*\* 24 hourly / 8 hourly values should be met 98 % of the time in a year. However, 2 % of the time, it may exceed but not on two consecutive days.

[Norms as per Ministry of Environment and Forests Notification, New Delhi, the 16<sup>th</sup> November, 2009] [Environment (Protection) Seventh Amendment Rules, 2009]

Chapter - 3

### 3.0 AMBIENT NOISE QUALITY STUDY

- **3.1.0Objective:** Anevaluation of ambient noise levels were carried out in and around the working areasduring September –December 2017, according to the following land use (Table 3.3) categories:
- Ambient Noise level in the Residential areas.
- Ambient Noise levels in the Commercial areas
- Ambient Noise Level in the Industrial areas

### 3.2.0 Selection of Noise level Monitoring Stations:

The noise level measurement stations selected according to each land use category, the locationdetails of which have been depicted in Table 3.0.

### 3.3.0 Sampling equipment and methodology:

### 3.3.1:Equipment:

Noise level measurements were carried out with the help of portable Sound level Meter (SL-4001 and SL 4033SD) respectively. M / S Lutron manufactured both the instruments.

### 3.3.2: Methodology:

- (a) For determination of ambient noise at a particular point, the noise meter probe was pointed to the four cardinal directions of north, south, east and west. Corresponding to each direction a set of reading in "slow" setting was recorded.
- (b) During the study time a gap of 30 seconds was allowed between two consecutive data observation. Sound level was collected to monitor the values of L10, L50, L90, Lmax, Lmin& L day and L night during the period of 24 hrs.monitoring period.
- (c) The noise levels were recorded continuously at 1 hourly interval through SL 4001. Thus in total 1440 readings were recorded after 12 hours study. While through SL 4033 SD, the ambient noise levels were measured for 24 hours continuously. So, here a total number of 2880 readings were recorded after 24 hours study.

The measurements recorded are detailed below:

### (c) Equivalent Continuous Sound Pressure Level (Leq):

Equivalent Continuous Sound Pressure Level, or Leq, is the constant noise level that would result in the same total sound energy being produced over a given period. It can be measured in either A, C or Z (Linear) modes. Leq is not an 'average sound level', as it sometimes referred to. The equations used to calculate Leq are not calculating a specific average level.

Leq can be described mathematically by the following equation:

$$L_{eq} = 10log_{10} \left( \frac{1}{T_{M}} \int_{0}^{M} \left( \frac{P(t)}{P_{0}} \right)^{2} dt \right)$$

Where:

- Leq is the equivalent continuous linear weighted sound pressure level re 20μPa, determined over a measured time interval Tm (secs)
- P(t) is the instantaneous sound pressure of the sound signal
- P0 is the reference sound pressure of 20μPa

When the instantaneous A-weighted sound pressure (PA) of the sound signal is introduced the equivalent continuous A-weighted sound pressure level determined over time interval Tm is as follows:

$$L_{eq} = 10log_{10} \frac{1}{T_{M}} \int_{0}^{T_{M}} \left( \frac{P_{A}(t)}{P_{0}} \right)^{2} dt$$

In practice when measuring noise it is possible to take Leq readings, with your instrument, of short duration, i.e <5 minutes, providing all variations of noise emissions are covered. If the measured environment changes greatly then the longer the Leq measurement is taken the more accurate the measurement.

Adding Leq values requires taking an anti-log of each value. The addition can be performed as shown:

A weighting: the A-weighting

Total L<sub>eq</sub> = 
$$10\log\left(\frac{10^{\frac{L_{eq}^{1}}{10}} + 10^{\frac{L_{eq}^{2}}{10}} + 10^{\frac{L_{eq}^{3}}{10}} + \dots + 10^{\frac{L_{eq}^{n}}{10}}}{n}\right)$$

filter covers the full audio range - 20 Hz to 20 kHz and the shape is similar to the response of the human ear at the lower levels.

A-weighted noise measurements are the most widely used and confirm the accuracy of the meter including the filters.

The preferred convention is to write LA = x dB, however dB A and dB (A) are often used, etc.,

C-weighting: a standard frequency weighting for sound level meters, commonly used for higher level measurements, it also written as dB(C) or dBC.

The A-weighting curve is used extensively for general purpose noise measurements but the C-weighting correlates better with the human response to high noise levels.

L50: If we consider any fluctuating noise levels and store the results once a second, then at the end of an hour we would have 3600 samples. We can then use these samples to determine some helpful statistics. For example if add up all the samples and divide by 3600 then we will get the average or L50% value of the noise over the hour.

L10: By definition the L10 value is the level just exceeded for 10% of the time and takes account of any annoying peaks of noise.

L90: By definition the L90 value is the level just exceeded for 90% of the time and takes account of any annoying peaks of noise.

L max is the highest RMS (root mean squared) sound pressure level within the measuring period.

L min is the lowest RMS sound pressure level within the measuring period.

L day is the total results during day time monitoring

L night is the total results during night time.


Table: 3.1
RESULTS OF AMBIENT NOISE LEVEL MONITORING

Location : Near Dry Dock Area-2

Period : August' 2021 to December' 2021

		Day Time ( 06:00 A.M. to 10:00 P.M. )  Noise Level in dB(A)						Night Time ( 10:00 P.M. to 06:00 A.M. )					
Date of Monitoring								Noise Level in dB(A)					
	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>	
30.08.2021	67.49	71.15	74.56	50.10	88.40	72.57	61.81	66.01	68.58	45.00	70.90	67.22	
30.09.2021	63.78	66.63	72.29	60.64	80.11	70.39	53.59	59.77	68.56	51.30	74.23	66.13	
28.10.2021	59.67	64.00	69.54	48.40	91.90	67.21	46.28	47.03	52.73	42.80	79.90	50.22	
17.11.2021	63.48	66.33	71.99	60.34	79.81	70.09	52.99	59.17	67.96	50.70	73.63	65.53	
22.12.2021	65.28	68.13	73.79	62.14	81.61	71.89	49.39	55.57	64.36	47.10	70.03	61.93	
Norms	75							75				70	

### AMBIENT NOISE LEVEL PRESENTED THROUGH HISTOGRAM

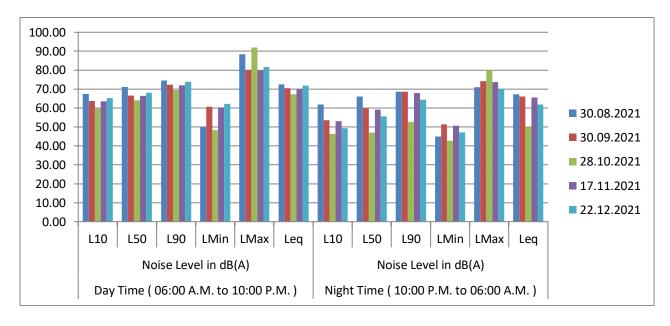

Phone: 4044 3380 / 81 / 82 / 83, Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com


Table: 3.2

: Beside Shed No. 22 Location

**Period** : August' 2021 to December' 2021

		Day Time ( 06:00 A.M. to 10:00 P.M. )						Night Time ( 10:00 P.M. to 06:00 A.M. )					
Date of Monitoring		Noise Level in dB(A)						Noise Level in dB(A)					
	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	
30.08.2021	64.37	69.45	75.69	61.77	79.01	73.43	61.06	66.31	70.42	60.24	71.16	69.05	
30.09.2021	70.18	70.70	72.05	69.23	75.92	71.28	64.37	65.09	65.98	63.99	67.99	65.34	
28.10.2021	64.29	70.30	76.28	52.70	91.30	73.86	49.81	55.69	61.53	42.50	97.70	60.02	
17.11.2021	69.68	70.20	71.55	68.73	75.42	70.78	64.27	64.99	65.88	63.89	67.89	65.24	
22.12.2021	60.42	66.41	71.89	52.37	77.94	68.83	49.47	56.26	61.59	43.56	68.03	58.83	
Norms	75											70	

### AMBIENT NOISE LEVEL PRESENTED THROUGH HISTOGRAM

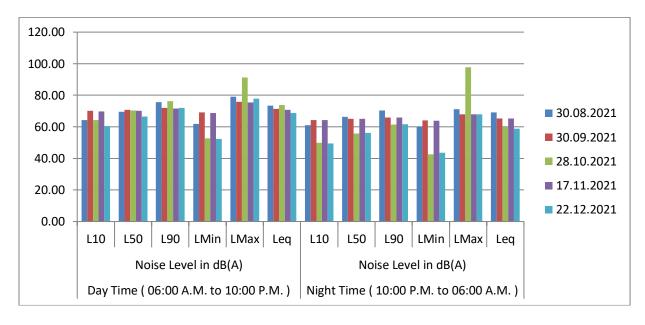

**Table: 3.3** 

Location: Near BERTH No. 7

Period: August' 2021 to December' 2021

	-	Day Time ( 06:00 A.M. to 10:00 P.M. )							Night Time ( 10:00 P.M. to 06:00 A.M. )						
Date of Monitoring		Noise Level in dB(A)						Noise Level in dB(A)							
	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	L <sub>eq</sub>			
30.08.2021	61.6	66.8	72.2	59.3	75.8	70.0	59.6	62.7	68.1	57.1	76.1	66.0			
30.09.2021	66.3	69.3	75.1	63.6	82.8	73.0	58.9	60.5	64.4	56.4	71.2	62.4			
28.10.2021	67.3	70.5	72.7	58.2	92.2	71.6	62.6	62.9	65.7	59.0	86.9	64.1			
17.11.2021	64.8	67.7	73.6	62.1	81.3	71.5	57.9	59.5	63.4	55.4	70.2	61.4			
22.12.2021	71.6 72.1 73.5 70.6 77.3 72.7						2.7 65.5 66.2 67.1 65.1 69					66.5			
Norms		•	•	•		75	75					70			

### AMBIENT NOISE LEVEL PRESENTED THROUGH HISTOGRAM

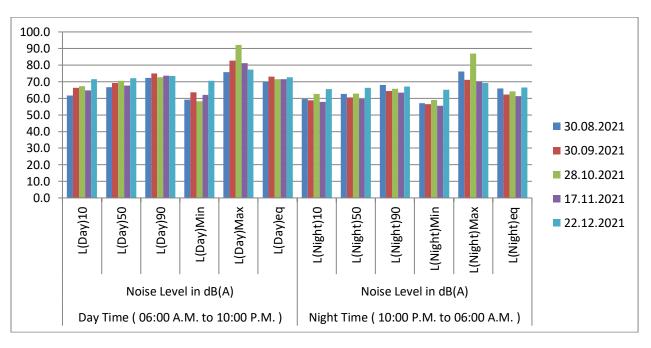


Table: 3.4

Location: Near BERTH No. 3

Period : August' 2021 to December' 2021

		Day Time ( 06:00 A.M. to 10:00 P.M. )							Night Time ( 10:00 P.M. to 06:00 A.M. )						
Date of Monitoring		Noise Level in dB(A)						Noise Level in dB(A)							
	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq	L <sub>10</sub>	L <sub>50</sub>	L <sub>90</sub>	L <sub>Min</sub>	L <sub>Max</sub>	Leq			
30.08.2021	60.4	63.9	69.6	58.8	77.1	67.9	60.9	62.0	63.4	60.1	66.6	62.3			
30.09.2021	66.2	72.2	77.7	58.2	83.8	74.6	58.2	65.0	70.3	52.3	76.8	67.6			
28.10.2021	57.0	62.3	68.3	46.6	85.6	65.8	45.7	46.9	52.0	41.8	75.4	49.5			
17.11.2021	65.2	71.2	76.7	57.2	82.8	73.6	56.2	63.0	68.3	50.3	74.7	65.5			
22.12.2021	60.4 63.4 69.2 57.8 76.9 67.						54.2	55.8	59.7	51.7	66.5	57.7			
Norms		•		•	•	75	75					70			

### AMBIENT NOISE LEVEL PRESENTED THROUGH HISTOGRAM

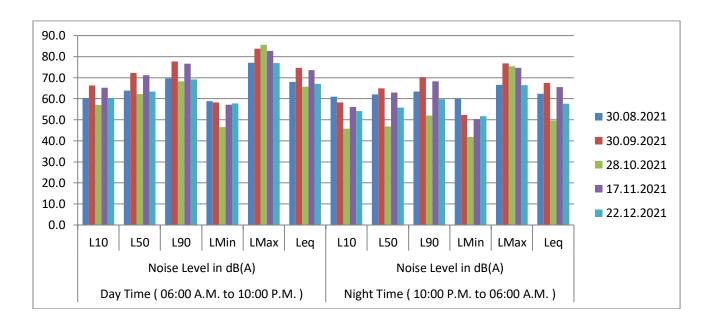


TABLE 3.5
NATIONAL AMBIENT NOISE LEVEL STANDARD

LIMITS IN d (B) A Leq										
AREA CODE CATEGORY OF AREA DAY TIME NIGHT										
А	INDUSTRIAL AREA	75	70							
В	COMMERCIAL AREA	65	55							
С	RESIDENTIAL AREA	55	45							
D	SILENCE ZONE	50	40							

### Note:

- 1. Day time is reckoned in between 6 a.m and 10 p.m
- 2. Night time is reckoned in between 10 p.m and 6 a.m
- 3. Silence zone is an area comprising not less than 100 metres around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority.
- 4. Mixed categories areas may be declared "as one of the four" above mentioned categories, by the Competent Authority.
- 5. dB (A) Leq denotes the time weighted average of the level of sound in decibels in scale A, which is relatable to human hearing. A "decibel" is a unit in which the noise is measured.

"A", in dB (A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.

Leq: It is energy mean of the noise level over a specified period.

### Source:

The Principal Rules were published in the Gazette of India, vide no. S.O 123 (E), dated 14<sup>th</sup> February 2000 and subsequently amended vise S.O 1046 (E), dated 22<sup>nd</sup> November, 2000, S.O 1088 (E), dated 11<sup>th</sup> October, 2002, S.O (1569 (E), dated the 19<sup>th</sup> September, 2006 and S.O 50 (E) dated 11<sup>th</sup> January, 2010.

Chapter - 4

### 4.0 CHARACTERIZATIONS OF DRINKING WATER SAMPLES

### 4.1.0 Objective:

Most important aim was to get an idea about the quality of the collected water samples, which were mainly used, for drinking purposes. The collected samples were analysed at the laboratory of R. V. Briggs at Kolkata.

### 4.2.0 Drinking Water Characterization:

### **Assessment:**

The drinking water quality was assessed for the following parameters:

- Total Coliform Organisms
- Faecal Coliform Organism
- pH
- Colour
- Turbidity
- Chloride
- Residual Chlorine
- Total Dissolved Solid

### 4.3.0 Plan of Sampling:

The details of the water sampling sites are as follows.

- (i) NS Dock Office
- (ii) 51 CGR Road, Civil Engg. Dock Office, 2nd Floor Tap
- (iii) Remount Road Quarter, 9 No. Civil Site Office
- (iv) Port Land Park Quarter, Civil Site Office
- (v) SMP Hospital, (KOL) Canteen # 09
- (vi) Canteen Aquaguard
- (vii) NS Dock Office, (Terminal)
- (viii) SMP Dock Office

### 4.5.0 Laboratory Determinations:

Bacteriological Count: The determination of Total coliform & Faecal Coliform count carried out according to the method prescribed by APHA 23rd Edn. 9222 B & APHA 23rd Edn. 9222 D respectively.

pH value : The pH value was calculated in the laboratory according to the method *prescribed by the IS* 3025 (Part-11) : 1983

Colour: The colour value was calculated in the laboratory according to the method prescribed IS: 3025-(part-4): 1983 Reaffirmed 2012.

Turbidity: The turbidity value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-10): 1984 Reaffirmed 2012.

Chloride: The chloride value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-32): 1988 Reaffirmed 2009.

Residual Chlorine: The residual chlorine value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-26): 1986 Reaffirmed 2009.

Total Dissolved Solid: The TDS value was calculated in the laboratory according to the method prescribed IS: 3025 (Part-16): 1984 Reaffirmed 2012.

### REPORT OF DRINKING WATER

**Table - 4.1** 

Date of monitoring: 02.08.2021

					Res	ult			
Test		W(D)/21- 22/884	W(D)/21- 22/885	W(D)/21- 22/886	W(D)/21- 22/887	W(D)/21- 22/888	W(D)/21- 22/889	W(D)/21- 22/890	W(D)/21- 22/891
parameters	Unit	51 C G R	N. S. Dock	Remount	Port Land	KOPT	NS Dock	KP Dock	Canteen
1		Road, Civil	Office	Road	Park	Hospital	Office (Tap)	Office (Tap)	Aquaguard
		Engg. Office 2nd Floor Tap	(Terminal)	Quarter (9 No. Civil Site	Quarter Civil Site	Canteen			
		Zilu Floor Tap		Office)	Office				
Coliform Organism	CFU/100ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Faecal Coliform	CFU/100ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Colour	Hazen	1	1	1	1	1	1	1	1
Turbidity	NTU	1.0	< 1	< 1	2.8	< 1	1.3	1.1	< 1
pH value		8.0	7.6	7.5	7.4	7.3	7.3	7.5	7.6
Total Dissolved Solids	mg/l	150	490	162	146	156	510	492	244
Chloride as Cl	mg/l	15	140	15	17	19	146	148	21
Residual Free Chlorine	mg/l	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1

Phone: 4044 3380 / 81 / 82 / 83, Fax: 33-2248-044, E-mail: rvbriggs.kolkata@gmail.com

**Table - 4.2** 

Date of monitoring: 28.10.2021

					Res	sult			
		W(D)/21-	W(D)/21	W(D)/21	W(D)/21	W(D)/21	W(D)/21	W(D)/21	W(D)/21
Test		22/1761	-22/1762	-22/1763	-22/1764	-22/1765	-22/1766	-22/1767	-22/1768
parameters	Unit	51 C G R	N. S. Dock	Remount	Port Land	KOPT	NS Dock	KP Dock	Canteen
		Road, Civil	Office	Road	Park Quarter	Hospital	Office (Tap)	Office (Tap)	Aquaguard
		Engg. Office 2nd Floor	(Terminal)	Quarter (9 No. Civil Site	Civil Site Office	Canteen			
		Tap		Office)	Office				
Coliform Organism	CFU/100ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Faecal Coliform	CFU/100ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Colour	Hazen	1	1	1	1	1	1	1	1
Turbidity	NTU	<1	<1	<1	<1	<1	<1	<1	<1
pH value		7.2	7.4	7.4	7.4	7.4	7.6	7.5	7.1
Total Dissolved Solids	mg/l	198	516	206	180	188	568	190	200
Chloride as Cl	mg/l	19	145	21	21	21	73	19	19
Residual Free Chlorine	mg/l	0.102	0.12	0.13	0.11	0.12	0.14	0.15	0.15

### 4.9.1. Assessment of analytical Results against Standards:

As the above mentioned supply water samples were used mostly for drinking water and also for cooking purposes, So, the assessment was carried out as per the stipulated Standards of IS: 1622 (1981) for Bacteriological parameters and IS: 10,500 (2012) 2<sup>nd</sup> revision for other parameters respectively as specified by MoEF, Government of India:

### (a) Bacteriological Parameters:

The count of bacteriological parameters in terms of Total coliform count and Faecal (E.coli) Coliform Organisms were absent and are safe to consume in the collected samples.

### (b) Organoleptic and Physical Parameters:

pH, Turbidity and Total Dissolved Solids were within their respective acceptable limits.

Table - 4.3
NATIONAL DRINKING WATER STANDARD

T. (D.	***	Norms as per IS:	10500, 2012 (2nd Rev.)
Test Parameters	Unit	Acceptable Limit	Permissible Limit
Coliform Organism	CFU/100ml	A	Absent
Faecal Coliform	CFU/100ml	A	Absent
Colour	Hazen	5 Max.	15 Max.
Turbidity	NTU	1.0 Max.	5.0 Max.
pH value		6.5 - 8.5	No Relaxation
Total Dissolved Solids	mg/l	500 Max.	2000 Max.
Chloride as Cl	mg/l	250 Max.	1000 Max.
Residual Free Chlorine	mg/l	0.2 min	1 Max.

Chapter - 5

### 5.0 CHARACTERIZATIONS OF SURFACE WATER QUALITY

### 5.1 Dock Basin & River Water Characterization:

**5.1.1 Objective**: The main purpose of the study was to get an idea about the quality of Dock Basin & River water within the area of study. All together 4 Dock Basin warter samples and 2 River water samples were collected and were analysed within our present area of study.

Four (04) *Dock Basin* samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-28 KPD) and (iv) KPD 1 (11 KPD) respectively.

Two (02) *River water* samples were collected from (i) Outside of NS Dock Basin on River, (ii) Outside of KP Dock Basin on River.

# 5.1.2 Dock Basin & River water character of the present study areas were assessed in terms of the following structure:

- (a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count
- (b) Organoleptic and Physical Parameters:
- i) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids
- (c) General Parameters Concerning Substances undesirable in Excessive Amounts:
- (i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii) COD.

### 5.1.3: Plan of Sampling:

Altogether Dock Basin warter samples and 2 River water samples were collected from the locations mentioned above (4.8.1). Major groundwater sources, the details of the water sampling sites were given in the Table 4.3 a to 4.3 c.

### 5.1.4 Sampling Procedure:

For each location three water samples were collected (Plate – 5) for the following analysis: (i) *Bacteriological analysis*: The sample was collected in a pre-sterilised 250 ml. water bottle, wearing throwaway gloves. The sample bottles were previously sterilized by autoclaving. Two layers of papers covered the stopper and the neck of bottle, prior to sterilization. The opening and closing of the bottles in the process of sample collection was carried out with meticulous care to avoid any bacterial contamination from outside source. When water was collected from tube well, the mouth of the tube well was flamed for 10 minutes, and the water was allowed to run for 5 minutes before filling the bottle. The bottle was filled up to neck leaving 3 inches air space vertically below the glass stopper. Immediately after collection, the samples

were transported to the R.V.Briggs laboratory in an ice – box, which was kept in temperatures within 4°C. While for determination of other parameters like: *non-metals*:Colour, pH value,Turbidity, Total Dissolved Solids, Total Suspended Solids, Dissolved Oxyzen, Salinity, Ammoniacal Nitrogen, Sulphate, oil & Grease, BOD, COD a total quantity of 2.0 Liters of effluent was collected from the locations in separated bottles. Before collection, the containers were washed with the sample water with vigorous shake. Then the samplings were carried out from 60 cm deep inside .(i) In a dusky glass bottle of 1 litre capacity the sample was collected for determination of Oil & Grease. (ii) Second sample was collected in a plastic container of 1 litre capacity for testing of its pH, Total Suspended Solids, Chemical Oxygen Demand & Bio Chemical Oxygen Demand. The D.O for the sample was measured at the sampling site. After collection, the samples were immediately transported to the R.V.Brigg's laboratory at Kolkata. The whole collection procedure was carried out in presence of KPT official.

### 5.1.5: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

- Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981
- pH value: The pH value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4550 H + B)
- Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985
- Turbidity: The Turbidity value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2130 B)
- Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2540 C)
- Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2540 D).
- Oil & Grease: The Oil & Grease was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 5520 B).
- COD: The COD was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5220 B).
- BOD: The BOD was measured in the laboratory according to the method prescribed by the IS 3025 (Part 44) 1966.
- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2520 **B**).

- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by I.S.
   3025 (Part 24) 1986.

### 5.1.6 Assessment of Analytical Results against Standards of Dock Basin & River water: (Table 5.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value : It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids
- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Table 5.1

Analytical Results of Surface Water Sample collected from the above-mentioned locations

Surface Water (River Water)

			Juliace Water (Niver Wate	' /	
			Our Ref. No.	/ Location	
			E(D)/21-22/681	E(D)/21-22/682	Norms as per IS:
Sl.			Outside NS Dock Basin on	Outside KP Dock Basin	2296-1982 (Class
No.	Test Parameters	Unit	River, 28.10.2021	on River, 28.10.2021	<b>C</b> ) `
1	Colour	Hazen	1	1	300 (Max.)
2	pH Value		7.11	7.21	6.5 - 8.5
	Total Dissolved Solids				
3	(TDS)	mg/l	196	208	1500 (Max.)
	Dissolved Oxygen				
4	(DO)	mg/l	7.1	7	4 (Min.)
	Oil and Grease (O &				
5	G)	mg/l	1.79	1.84	0.1 (Max.)
	BOD for 3 days at 27°C				
6	(BOD)	mg/l	5.2	1.75	3 (Max.)
7	Sulphate as SO <sub>4</sub>	mg/l	10.3	11.8	400 (Max.)
8	Turbidity	mg/l	38.1	20.5	
	Ammoniacal Nitrogen				
9	as NH <sub>3-</sub> N	mg/l	< 0.2	< 0.2	
10	Salinity	PSU	0.1688	0.1742	
	Total Suspended				
11	Solids (TSS)	mg/l	58	54	
	Chemical Oxygen				
12	Demand (COD)	mg/l	21	17	
13	Total Coliform/100 ml.	MPN	140000	22000	5000 (Max.)
	Faecal Coliform/100				
14	ml.	MPN	79000	13000	

### 6.1 Waste Water Characterization:

**6.1.1 Objective**: The main purpose of the study was to get an idea about the quality of Effluents within the area of study. All together 4 Effluent samples were collected and were analysed within our present area of study.

Four (04) *Effluent* samples collected from: (i) 7 - 8 N.S. Dock, (ii) N.S. D. Lock Entrance (iii) KPD 2 (26-28 KPD) and from (iv) KPD 1 (11 KPD) respectively.

# 6.1.2 Effluent character of the present study areas were assessed in terms of the following structure:

- (a) Bacteriological Count: (i) Total coliform count (ii) Faecal (E.coli) coliform Count
- (b) Organoleptic and Physical Parameters:
- ii) Colour, (ii) pH value, (iii) Turbidity, (iv) Total Dissolved Solids (iv) Total Suspended Solids
- (c) General Parameters Concerning Substances undesirable in Excessive Amounts:
- (i) Dissolved Oxyzen, (ii) Salinity, (iii) Ammoniacal Nitrogen, (iv) Sulphate, (v) oil & Grease, (vi) BOD, (vii) COD.

### 6.1.5: Laboratory determination:

The laboratory determination of above mentioned parameters carried out as per following procedure:

- Faecal (E.coli) coliform count: The method was followed as per IS: 1622, 1981
- pH value: The pH value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4550 H + B)
- Taste: The method was followed according to the procedure of IS: 3025 (Part -8) 1985
- Turbidity: The Turbidity value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2130 B)
- Total Dissolved Solids (TDS): The TDS value was calculated in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2540 C)
- Total Suspended Solids (TSS): The TSS was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 2540 D).
- Oil & Grease: The Oil &Grease was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5520 B).
- COD: The COD was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 5220 B).

- BOD: The BOD was measured in the laboratory according to the method prescribed by the IS 3025 (Part 44) 1966.
- Ammoniacal Nitrogen: The Ammoniacal Nitrogen was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition – 4500 NH<sub>3</sub>F).
- Salinity: The Salinity was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 2520 **B**).
- DO: The DO was measured in the laboratory according to the method prescribed by the American Public Health Association (APHA) in their Publication (23<sup>nd</sup> edition 4500 OC).
- Sulphate: The Sulphate was measured in the laboratory according to the method prescribed by I.S.
   3025 (Part 24) 1986.

### 6.1.6 Assessment of Analytical Results against Standards of Effluent: (Table 6.1):

The assessment was made against the stipulated standard prescribed by the West Bengal Pollution Control Board:

- ✓ pH value : It was marginally above the stipulated tolerance limit...
- ✓ Colour:
- ✓ Turbidity
- ✓ Total Dissolved Solids
- ✓ Total Suspended Solids: The value was within the specific norms.
- ✓ Oil & Grease: The value was within the fixed norms.
- ✓ BOD: The value was within the given norms.
- ✓ COD: The value was within the set norms.
- ✓ Ammoniacal Nitrogen
- ✓ Sulphate
- ✓ Salinity
- ✓ DO:
- ✓ Total Coliform
- √ Faecal Coliform

Table 6.1

ANALYTICAL RESULTS OF THE EFFLUENTSAMPLES COLLECTED Effluent (Dock Basin Water)

Sl.	Test Parameters	Unit		Our Ref. No	o./ Location		Limit as per Environmental
No.			E(D)/21- 22/683 7-8 N.S. Dock	E(D)/21- 22/684 N.S. D. Lock Entrance	E(D)/21- 22/685 KPD 2 (26-28 KPD)	E(D)/21- 22/686 KPD 1 (11 KPD)	Protection Act, MOE & F for Effluent discharged
			28.10.2021	28.10.2021	28.10.2021	28.10.2021	into Inland surface water
1	pH Value		7.08	7.18	7.4	7.19	5.5 - 9.0
2	Turbidity	NTU	7.1	5.6	5.2	7.2	
3	Total Suspended Solids (TSS)	mg/l	12	11	10	12	100 (Max.)
4	Ammoniacal Nitrogen as NH <sub>3</sub> -N	mg/l	< 0.2	< 0.2	<0.2	<0.2	50 (Max.)
5	Oil and Grease (O & G)	mg/l	<6.0	<6.0	<6.0	<6.0	10 (Max.)
6	BOD for 3 days at 27°C	mg/l	5.2	<5	5.7	6.1	30 (Max.)
7	Chemical Oxygen Demand (COD)	mg/l	26	24	27	27	250 (Max.)
8	Sulphate as SO <sub>4</sub>	mg/l	12.3	22.3	22.3	21	
9	Colour		1	1	1	1	
10	Salinity	PSU	0.4493	0.4954	0.4436	0.4321	
11	Total Dissolved Solids (TDS)	mg/l	498	544	462	478	
12	Dissolved Oxygen (DO)	mg/l	6.9	6.7	6.8	6.9	
13	Total Coliform/100 ml. (TC)	MPN	120	1400	210	170	
14	Faecal Coliform/100 ml. (FC)	MPN	49	790	140	110	1000 (Max.)